



LK-CM | JULY 2025
Replaces May 2025

CENTER MOUNT EVAPORATOR

Technical Guide
Including A2L models meeting DOE minimum AWEF

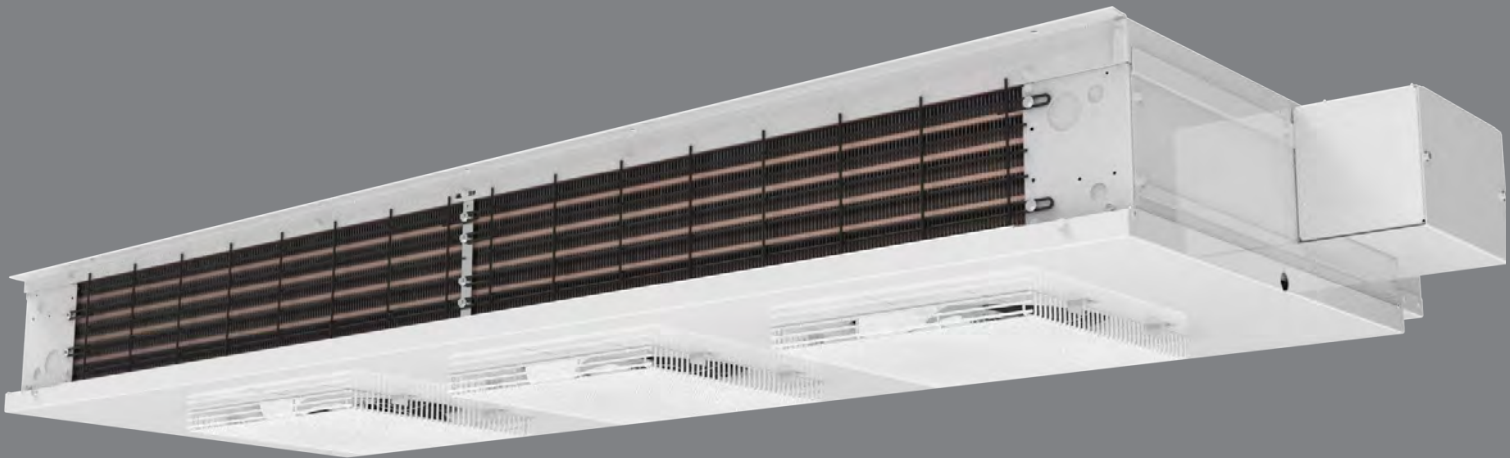


TABLE OF CONTENTS

3	Features & Benefits
4	Outstanding Features
5	Nomenclature
5	Preferred Option Packages
6	A2L & A1 Air Defrost
6	A2L Performance Data/Air Defrost- 60 Hz
7	A1 Performance Data/Air Defrost- 60 Hz
8	Unit Specifications
9	A2L & A1 Electric Defrost
9	A2L Performance Data-Low Temperature/Electric Defrost- 60 Hz
10	A1 Performance Data-Low Temperature/Electric Defrost- 60 Hz
11	A2L Performance Data-Medium Temperature/Electric Defrost- 60 Hz
12	A1 Performance Data-Medium Temperature/Electric Defrost- 60 Hz
13	Unit Specifications
14	Physical Data
15	Dimensional Drawings
16	Dimensional Data
18	AWEF Data
20	Replacement Parts
22	Standard Nozzle Selection



FEATURES & BENEFITS

CABINET

- Air moves across the ceiling in both directions providing even air distribution throughout the cooler
- Compact, ceiling mount and center mount design allows for shelving and storage of product around all walls
- Painted white aluminum cabinet cleans easily and looks attractive
- Cabinet design features improved access panels on each end for easy access to electrical and refrigeration components
- Improved wire management and routing
- Quick disconnect, waterproof plug and receptacle for each motor in all models
- Molded fan guard is made of strong, durable, NSF and UL Sanitation rated lightweight and damage resistant plastic material
- Liquid line solenoid wire harness is factory-installed for quick installation

COIL

- High-efficiency aluminum fins with full collars cover mechanically expanded copper tubes
- Coils are dehydrated and sealed at the factory
- Electric defrost models incorporate high quality tubular heaters and a standard fixed defrost termination thermostat
- Generous coil surface gives proper compressor balance
- Standard adjustable defrost termination fan delay thermostat
- Internally enhanced tubing and fin design for higher efficiency
- Optimized heater placement with reduced heater wattages
- Fixed defrost termination for electric, adjustable defrost termination for hot gas

DRAIN PAN

- Hinged drain pan for faster, easier and safer access and serviceability
- Tapered mounting provides proper slope for condensate drainage to one end of the unit
- Double drain pan eliminates drain pan sweating

MOTOR

- Motor rail is design for maximum strength and durability
- Motors are life lubricated and thermal overload protected
- 2 Speed EC Motors are factory-installed

CONTROL OPTIONS

- intelliGen™ Refrigeration Controller (IRC) units come with a factory mounted controller, tested and calibrated with an electronic expansion valve, pressure transducer, temperature sensors, control board and user interface. Standard features include Door Sensor, Product Load Input and Alarm Output.
- Optional Factory or Field installable intelliGen Webserver Card (iWC) enables local and remote monitoring on any Phone, Tablet or PC.
- Optional Factory or Field installable intelliGen Integration Card (iIC) enables connectivity to BACnet and Modbus.

OTHER OPTIONS

- Factory installed mounted components are available in these configurations:
- Pre-assembled units available with mounted TXV, liquid line solenoid valve and room thermostat
- Mounted TXV
- Mounted TXV and solenoid valve
- Units available with stainless steel housing and drain pan
- Air defrost units are available with various coil coatings options

A2L FEATURES AND OPTIONS

- A2L and A1 dual refrigerants compatible models
- Factory mounted Refrigerant Detection System (RDS)
 - Mounted refrigerant leak detection sensors
 - Mounted refrigerant leak mitigation controller
 - Early warning leak detection with relay output for external alert devices
 - Mitigation alarm with relay output for external alarm devices
- Base model option available with or without RDS
- Field mounted Refrigerant Detection System kit available.
- Protection grill for evaporator coil
- Piping protection guards for refrigerant line connections
- Red tags on service valves and connection points as indicators for A2L refrigerants
- A2L labels to meet regulatory requirement

OUTSTANDING FEATURES


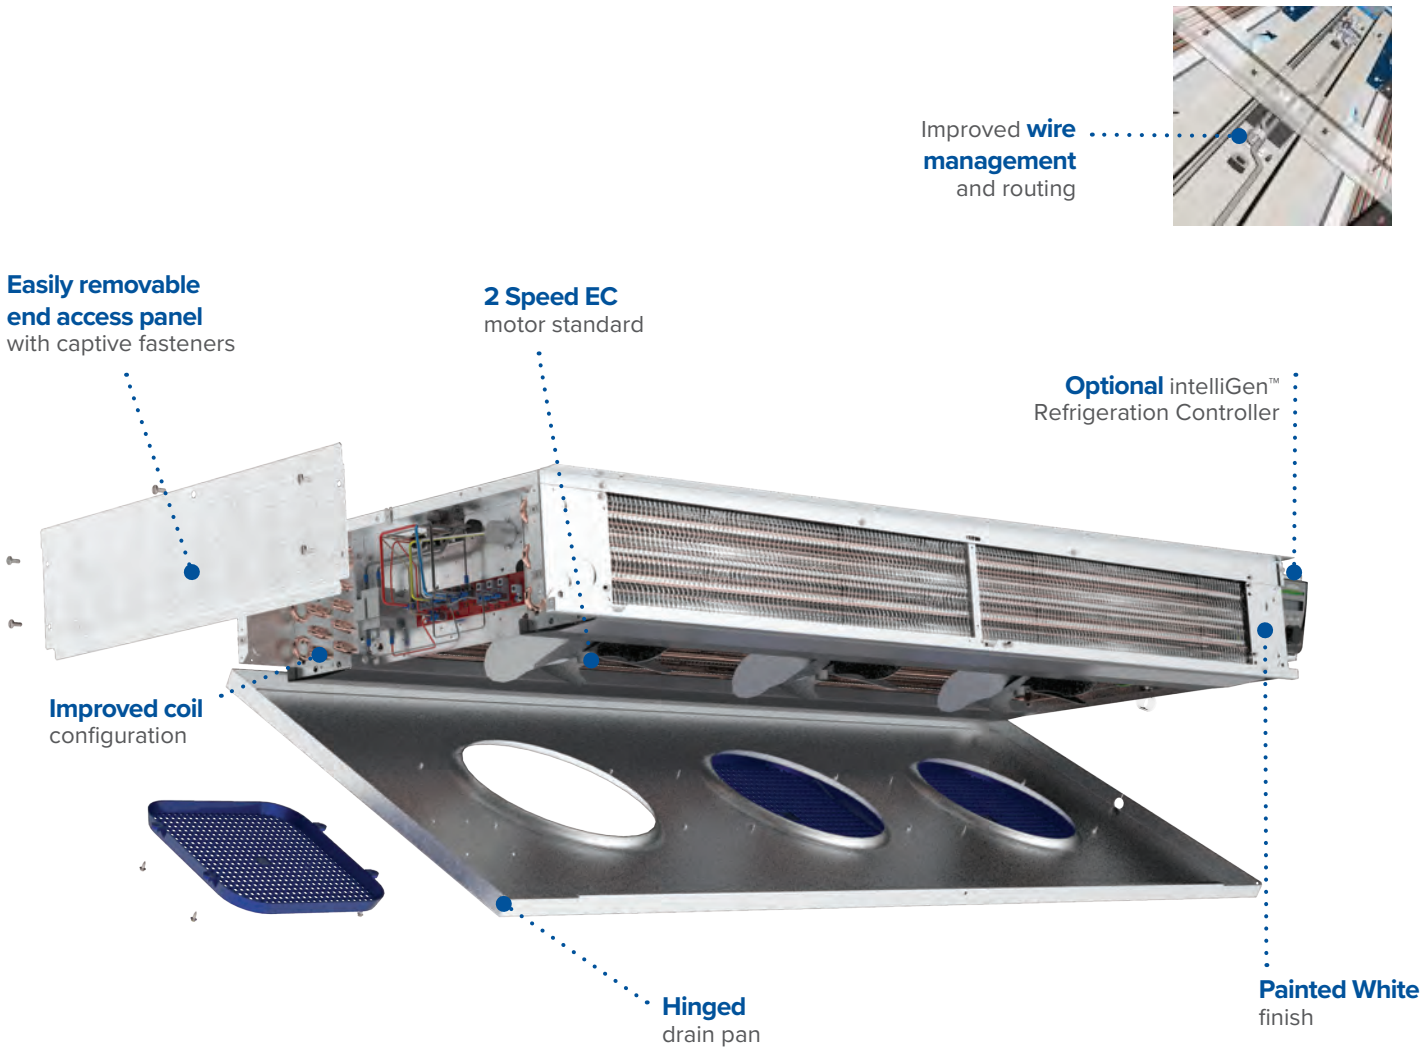


Table 1: Capacity Correction Factors

Electric and Hot Gas Defrost Units				
Saturated Suction Temperature °F	+20	-10	-20	-30
Saturated Suction Temperature °C	-7	-23	-29	-34
Multiply Capacity By	1.15	1.04	1.00	0.90

NOMENCLATURE

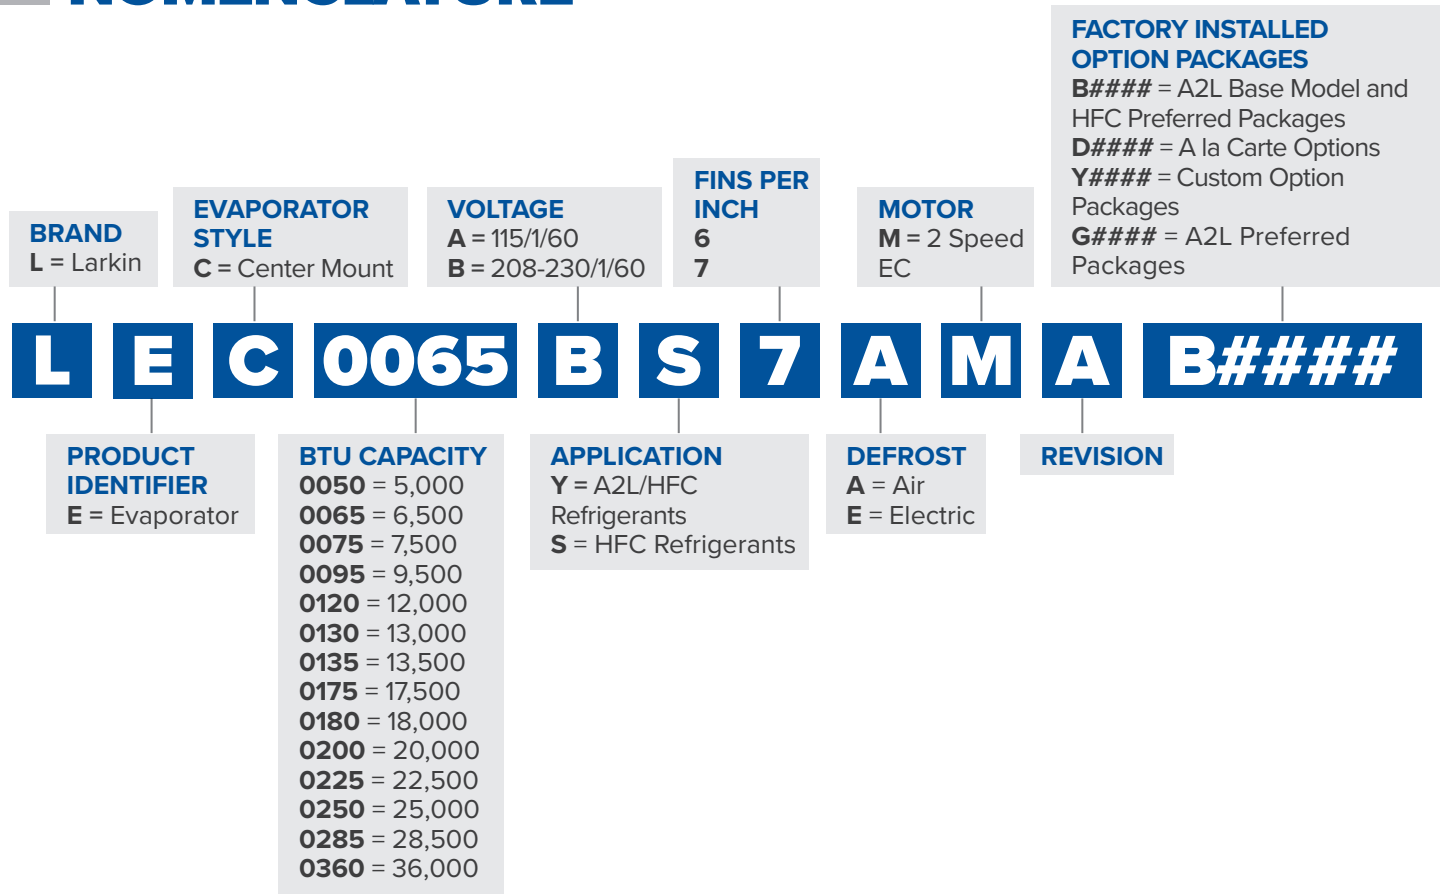

PREFERRED OPTION PACKAGES

Package	Description
B0200	intelliGen Refrigeration Controller (R-404A/R-448A/R-449A)
B0201	intelliGen Refrigeration Controller (R-407A/C/F)
B0403	Mounted Components (TXV, Solenoid Valve, Elec. T'stat - (R-404A)
B0404	Mounted Components (TXV, Solenoid Valve, Elec. T'stat - (R-407A/C/F)
B0405	Mounted Components (TXV, Solenoid Valve, Elec. T'stat - (R-448A/R-449A)
B0000	A2L/HFC Base Model
G0000	Standard Base with RDS
G0210	Standard Base with RDS + intelliGen™ (R-455A)
G0211	Standard Base with RDS + intelliGen™ (R-454C)
G0212	Standard Base with RDS + intelliGen™ (R-454A)
G0410	Standard Base with RDS + Mounted TXV + Solenoid Valve + Electronic T'Stat - (R-455A)
G0411	Standard Base with RDS + Mounted TXV + Solenoid Valve + Electronic T'Stat - (R-454C)
G0412	Standard Base with RDS + Mounted TXV + Solenoid Valve + Electronic T'Stat - (R-454A)

A2L PERFORMANCE DATA

Application Capacity: Air Defrost- 60 Hz

Please consult AWEF table on page 18 to confirm model meets DOE minimum AWEF

	R454A				R454C						
	Application Capacity ¹				Application Capacity ¹						
	10°F TD/ 25°F SST	6°C TD/ -4°C SST	Room Area Minimum**	Line Length	10°F TD/ 25°F SST	6°C TD/ -4°C SST	Room Area Minimum**	Line Length	Fan Data		
New Model	BTUH	Watts	Sq. Ft.	Ft.	BTUH	Watts	Sq. Ft.	Ft.	No. of Fans	CFM	m³H
LEC0065*Y7AMA	6,500	1,905	32	10	5,300	1,553	31	10	1	610	1,036
LEC0095*Y7AMA	9,200	2,696	46	10	7,600	2,227	45	10	2	1,220	2,073
LEC0130*Y7AMA	13,100	3,839	46	10	10,800	3,165	45	10	2	1,220	2,073
LEC0175*Y7AMA	17,500	5,129	58	20	14,400	4,220	56	20	3	1,830	3,109
LEC0200*Y7AMA	20,100	5,891	58	20	16,500	4,836	56	20	3	1,830	3,109
LEC0225*Y7AMA	22,500	6,594	67	20	18,500	5,422	65	20	3	1,830	3,109
LEC0250*Y7AMA	24,900	7,297	70	20	20,500	6,008	67	20	4	2,440	4,146
LEC0285*Y7AMA	28,600	8,382	81	20	23,500	6,887	79	20	4	2,440	4,146
LEC0360*Y7AMA	36,100	10,580	96	20	29,700	8,704	93	20	5	3,050	5,182

	R455A						
	Application Capacity¹						
	10°F TD/ 25°F SST	6°C TD/ -4°C SST	Room Area Minimum**	Line Length	Fan Data		
New Model	BTUH	Watts	Sq. Ft.	Ft.	No. of Fans	CFM	m³H
LEC0065*Y7AMA	6,900	2,022	27	10	1	610	1,036
LEC0095*Y7AMA	9,800	2,872	39	10	2	1,220	2,073
LEC0130*Y7AMA	14,000	4,103	39	10	2	1,220	2,073
LEC0175*Y7AMA	18,700	5,480	49	20	3	1,830	3,109
LEC0200*Y7AMA	21,500	6,301	50	20	3	1,830	3,109
LEC0225*Y7AMA	24,100	7,063	57	20	3	1,830	3,109
LEC0250*Y7AMA	26,700	7,825	59	20	4	2,440	4,146
LEC0285*Y7AMA	30,600	8,968	69	20	4	2,440	4,146
LEC0360*Y7AMA	38,600	11,313	81	20	5	3,050	5,182

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

Net Capacity is available upon request

± = Y/S (see Nomenclature details)

** Room Area Minimum is calculated using the Line Length from the Safety Shut-off Valve (SSOV) to the Unit Cooler. For applications requiring other line lengths, please contact Heatcraft Representative for Room Area Minimum re-calculation.

A1 PERFORMANCE DATA

Application Capacity: Air Defrost- 60 Hz

Please consult AWEF table on page 18 to confirm model meets DOE minimum AWEF

New Model	Legacy Model	R-404A/R-507A		R-448A/R-449A		Fan Data		
		Application Capacity¹		Application Capacity¹				
		10°F TD/25°F SST	6°C TD/4°C SST	10°F TD/25°F SST	6°C TD/4°C SST	No. of Fans	CFM	m³H
BTUH	Watts	BTUH	Watts					
LEC0065*±7AMA	ACM052	5,200	1,524	6,400	1,875	1	610	1,036
LEC0095*±7AMB	ACM076 ACM090	7,000	2,051	9,100	2,666	2	1,220	2,073
LEC0130*±7AMA	ACM102	9,100	2,666	13,000	3,809	2	1,220	2,073
LEC0175*±7AMA	ACM108	10,800	3,164	17,350	5,084	3	1,830	3,109
LEC0200*±7AMA	ACM134	13,400	3,926	19,900	5,831	3	1,830	3,109
LEC0225*±7AMA	ACM156	15,600	4,571	22,300	6,534	3	1,830	3,109
LEC0250*±7AMA	ACM179	17,900	5,245	24,700	7,237	4	2,440	4,146
LEC0285*±7AMA	ACM208	20,800	6,094	28,300	8,292	4	2,440	4,146
LEC0360*±7AMA	ACM249	24,900	7,296	35,750	10,475	5	3,050	5,182

New Model	Legacy Model	R-407A/R-407F		R-407C		Fan Data		
		Application Capacity¹		Application Capacity¹				
		10°F TD/25°F SST	6°C TD/4°C SST	10°F TD/25°F SST	6°C TD/4°C SST	No. of Fans	CFM	m³H
BTUH	Watts	BTUH	Watts					
LEC0065*±7AMA	ACM052	6,400	1,875	6,400	1,875	1	610	1,036
LEC0095*±7AMB	ACM076 ACM090	9,100	2,666	9,100	2,666	2	1,220	2,073
LEC0130*±7AMA	ACM102	13,000	3,809	13,000	3,809	2	1,220	2,073
LEC0175*±7AMA	ACM108	17,350	5,084	17,350	5,084	3	1,830	3,109
LEC0200*±7AMA	ACM134	19,900	5,831	19,900	5,831	3	1,830	3,109
LEC0225*±7AMA	ACM156	22,300	6,534	22,300	6,534	3	1,830	3,109
LEC0250*±7AMA	ACM179	24,700	7,237	24,700	7,237	4	2,440	4,146
LEC0285*±7AMA	ACM208	28,300	8,292	28,300	8,292	4	2,440	4,146
LEC0360*±7AMA	ACM249	35,750	10,475	35,750	10,475	5	3,050	5,182

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

Net Capacity is available upon request

± = Y/S (see Nomenclature details)

SPECIFICATIONS

Air Defrost- 60 Hz

Please consult AWEF table on page 18 to confirm model meets DOE minimum AWEF

New Model	HP	2 Speed EC Motor							
		115/1/60				208-230/1/60			
		Amps	Watts	MCA	MOPD	Amps	Watts	MCA	MOPD
LEC0065*±7AMA	1/20	0.8	55	1.1	20	0.4	55	0.6	15
LEC0095*±7AMA	1/20	1.7	110	2.0	20	0.8	110	1.1	15
LEC0130*±7AMA	1/20	1.7	110	2.0	20	0.8	110	1.1	15
LEC0175*±7AMA	1/20	2.5	165	2.9	20	1.3	165	1.6	15
LEC0200*±7AMA	1/20	2.5	165	2.9	20	1.3	165	1.6	15
LEC0225*±7AMA	1/20	2.5	165	2.9	20	1.3	165	1.6	15
LEC0250*±7AMA	1/20	3.4	220	3.8	20	1.7	220	2.1	15
LEC0285*±7AMA	1/20	3.4	220	3.8	20	1.7	220	2.1	15
LEC0360*±7AMA	1/20	4.2	275	4.7	20	2.1	275	2.6	15

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

Net Capacity is available upon request

± = Y/S (see Nomenclature details)

A2L PERFORMANCE DATA

Application Capacity: Low Temperature Electric Defrost- 60 Hz

Please consult AWEF table on page 19 to confirm model meets DOE minimum AWEF

Please refer to Table 1: Capacity Correction Factors (page 4) if using Saturated Suction Temperatures different than listed in the information below

	R454A				R454C						
	Application Capacity ¹				Application Capacity ¹						
	10°F TD/ 25°F SST	6°C TD/ -4°C SST	Room Area Minimum**	Line Length	10°F TD/ 25°F SST	6°C TD/ -4°C SST	Room Area Minimum**	Line Length	Fan Data		
New Model	BTUH	Watts	Sq. Ft.	Ft.	BTUH	Watts	Sq. Ft.	Ft.	No. of Fans	CFM	m³H
LEC0050BY6EMA	5,300	1,553	32	10	4,600	1,348	31	10	1	610	1,036
LEC0075BY6EMA	8,400	2,462	40	10	7,200	2,110	39	10	2	1,220	2,073
LEC0120BY6EMA	13,200	3,869	52	10	11,300	3,312	51	10	3	1,830	3,109
LEC0135BY6EMA	15,200	4,455	61	10	13,000	3,810	59	10	3	1,830	3,109
LEC0180BY6EMA	20,500	6,008	81	20	17,500	5,129	79	20	4	2,440	4,146
LEC0255BY6EMA	24,700	7,239	96	20	21,200	6,213	93	20	5	3,050	5,182
LEC0280BY6EMA	27,200	7,972	96	20	23,200	6,799	93	20	5	3,050	5,182

	R455A						
	Application Capacity ¹						
	10°F TD/ 25°F SST	6°C TD/ -4°C SST	Room Area Minimum**	Line Length	Fan Data		
New Model	BTUH	Watts	Sq. Ft.	Ft.	No. of Fans	CFM	m³H
LEC0050BY6EMA	5,200	1,524	32	10	1	610	1,036
LEC0075BY6EMA	8,300	2,432	40	10	2	1,220	2,073
LEC0120BY6EMA	12,900	3,781	52	10	3	1,830	3,109
LEC0135BY6EMA	14,900	4,367	61	10	3	1,830	3,109
LEC0180BY6EMA	20,000	5,861	81	20	4	2,440	4,146
LEC0255BY6EMA	24,200	7,092	96	20	5	3,050	5,182
LEC0280BY6EMA	26,600	7,796	96	20	5	3,050	5,182

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

Net Capacity is available upon request

± = Y/S (see Nomenclature details)

** Room Area Minimum is calculated using the Line Length from the Safety Shut-off Valve (SSOV) to the Unit Cooler. For applications requiring other line lengths, please contact Heatcraft Representative for Room Area Minimum re-calculation.

A1 PERFORMANCE DATA

Application Capacity: Low Temperature Electric Defrost- 60 Hz

Please consult AWEF table on page 19 to confirm model meets DOE minimum AWEF

Please refer to Table 1: Capacity Correction Factors (page 4) if using Saturated Suction Temperatures different than listed in the information below

		R-404A/R-507A		R-448A/R-449A				
		Application Capacity ¹		Application Capacity ¹				
	Legacy Model	10°F TD/-20°F SST	6°C TD/-29°C SST	10°F TD/-20°F SST	6°C TD/-29°C SST	Fan Data		
New Model		BTUH	Watts	BTUH	Watts	No. of Fans	CFM	m³H
LEC0050B±6EMA	ECM040	4,000	1,172	5,500	1,612	1	610	1,036
LEC0075B±6EMA	ECM054 ECM065	6,500	1,905	8,700	2,549	2	1,220	2,073
LEC0120B±6EMA	ECM090	9,000	2,637	13,600	3,985	3	1,830	3,109
LEC0135B±6EMA	ECM130	13,000	3,809	15,700	4,600	3	1,830	3,109
LEC0180B±6EMA	ECM174	17,400	5,098	21,100	6,182	4	2,440	4,146
LEC0255B±6EMA	N/A	18,000	5,274	25,500	7,472	5	3,050	5,182
LEC0280B±6EMA	N/A	19,000	5,567	28,000	8,204	5	3,050	5,182

		R-407A/R-407F		R-407C				
		Application Capacity ¹		Application Capacity ¹				
	Legacy Model	10°F TD/-20°F SST	6°C TD/-29°C SST	10°F TD/-20°F SST	6°C TD/-29°C SST	Fan Data		
New Model		BTUH	Watts	BTUH	Watts	No. of Fans	CFM	m³H
LEC0050B±6EMA	ECM040	5,500	1,612	5,500	1,612	1	610	1,036
LEC0075B±6EMA	ECM054 ECM065	8,700	2,549	8,700	2,549	2	1,220	2,073
LEC0120B±6EMA	ECM090	13,600	3,985	13,600	3,985	3	1,830	3,109
LEC0135B±6EMA	ECM130	15,700	4,600	15,700	4,600	3	1,830	3,109
LEC0180B±6EMA	ECM174	21,100	6,182	21,100	6,182	4	2,440	4,146
LEC0255B±6EMA	N/A	25,500	7,472	25,500	7,472	5	3,050	5,182
LEC0280B±6EMA	N/A	28,000	8,204	28,000	8,204	5	3,050	5,182

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

Net Capacity is available upon request

± = Y/S (see Nomenclature details)

A2L PERFORMANCE DATA

Application Capacity: Medium Temperature Electric Defrost- 60 Hz

Please consult AWEF table on page 19 to confirm model meets DOE minimum AWEF

Please refer to Table 1: Capacity Correction Factors (page 4) if using Saturated Suction Temperatures different than listed in the information below

	R454A				R454C						
	Application Capacity¹				Application Capacity¹						
	10°F TD/ 25°F SST	6°C TD/ -4°C SST	Room Area Minimum**	Line Length	10°F TD/ 25°F SST	6°C TD/ -4°C SST	Room Area Minimum**	Line Length	Fan Data		
New Model	BTUH	Watts	Sq. Ft.	Ft.	BTUH	Watts	Sq. Ft.	Ft.	No. of Fans	CFM	m³H
BEC0050BY6EMA	5,300	1,553	32	10	4,600	1,348	31	10	1	610	1,036
BEC0075BY6EMA	8,400	2,462	40	10	7,200	2,110	39	10	2	1,220	2,073
BEC0120BY6EMA	13,200	3,869	52	10	11,300	3,312	51	10	3	1,830	3,109
BEC0135BY6EMA	15,200	4,455	61	10	13,000	3,810	59	10	3	1,830	3,109
BEC0180BY6EMA	20,500	6,008	81	20	17,500	5,129	79	20	4	2,440	4,146
BEC0255BY6EMA	24,700	7,239	96	20	21,200	6,213	93	20	5	3,050	5,182
BEC0280BY6EMA	27,200	7,972	96	20	23,200	6,799	93	20	5	3,050	5,182

	R455A						
	Application Capacity¹						
	10°F TD/25°F SST	6°C TD/-4°C SST	Room Area Minimum**	Line Length	Fan Data		
New Model	BTUH	Watts	Sq. Ft.	Ft.	No. of Fans	CFM	m³H
BEC0050BY6EMA	5,200	1,524	32	10	1	610	1,036
BEC0075BY6EMA	8,300	2,432	40	10	2	1,220	2,073
BEC0120BY6EMA	12,900	3,781	52	10	3	1,830	3,109
BEC0135BY6EMA	14,900	4,367	61	10	3	1,830	3,109
BEC0180BY6EMA	20,000	5,861	81	20	4	2,440	4,146
BEC0255BY6EMA	24,200	7,092	96	20	5	3,050	5,182
BEC0280BY6EMA	26,600	7,796	96	20	5	3,050	5,182

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

[†] = Number of fans increases from legacy to new model

Net Capacity is available upon request

** Room Area Minimum is calculated using the Line Length from the Safety Shut-off Valve (SSOV) to the Unit Cooler. For applications requiring other line lengths, please contact Heatcraft Representative for Room Area Minimum re-calculation.

A1 PERFORMANCE DATA

Application Capacity: Medium Temperature Electric Defrost- 60 Hz

Please consult AWEF table on page 00 to confirm model meets DOE minimum AWEF

Please refer to Table 1: Capacity Correction Factors (page 4) if using Saturated Suction Temperatures different than listed in the information below

		R-404A/R-507A		R-448A/R-449A				
		Application Capacity ¹		Application Capacity ¹				
	Legacy Model	10°F TD/25°F SST	6°C TD/4°C SST	10°F TD/25°F SST	6°C TD/4°C SST	Fan Data		
New Model		BTUH	Watts	BTUH	Watts	No. of Fans	CFM	m³H
LEC0050B±6EMA	ECM040	4,600	1,348	6,325	1,853	1	610	1,036
LEC0075B±6EMA	ECM054 ECM065	7,450	2,183	10,005	2,931	2	1,220	2,073
LEC0120B±6EMA	ECM090	10,350	3,033	15,640	4,583	3	1,830	3,109
LEC0135B±6EMA	ECM130	14,950	4,380	18,055	5,290	3	1,830	3,109
LEC0180B±6EMA	ECM174	20,000	5,860	24,265	7,110	4	2,440	4,146
LEC0255B±6EMA	N/A	20,700	6,065	29,325	8,592	5	3,050	5,182
LEC0280B±6EMA	N/A	21,850	6,402	32,200	9,435	5	3,050	5,182

		R-407A/R-407F		R-407C				
		Application Capacity ¹		Application Capacity ¹				
	Legacy Model	10°F TD/25°F SST	6°C TD/4°C SST	10°F TD/25°F SST	6°C TD/4°C SST	Fan Data		
New Model		BTUH	Watts	BTUH	Watts	No. of Fans	CFM	m³H
LEC0050B±6EMA	ECM040	6,325	1,853	6,325	1,853	1	610	1,036
LEC0075B±6EMA	ECM054 ECM065	10,005	2,931	10,005	2,931	2	1,220	2,073
LEC0120B±6EMA	ECM090	15,640	4,583	15,640	4,583	3	1,830	3,109
LEC0135B±6EMA	ECM130	18,055	5,290	18,055	5,290	3	1,830	3,109
LEC0180B±6EMA	ECM174	24,265	7,110	24,265	7,110	4	2,440	4,146
LEC0255B±6EMA	N/A	29,325	8,592	29,325	8,592	5	3,050	5,182
LEC0280B±6EMA	N/A	32,200	9,435	32,200	9,435	5	3,050	5,182

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Number of fans increases from legacy to new model

Net Capacity is available upon request

± = Y/S (see Nomenclature details)

SPECIFICATIONS

Electric Defrost- 60 Hz

Please consult AWEF table on page 00 to confirm model meets DOE minimum AWEF

Please refer to Table 1: Capacity Correction Factors (page 4) if using Saturated Suction Temperatures different than listed in the information below

New Model	HP	2 Speed EC Motor (Totally Enclosed)				Defrost Heaters	
		208-230/1/60					
		Amps	Watts	MCA	MOPD	Watts	Total Amps
LEC0050B±6EMA	1/20	0.4	55	0.6	15	1,200	5.3
LEC0075B±6EMA	1/20	0.8	110	1.1	15	2,000	8.7
LEC0120B±6EMA	1/20	1.3	165	1.6	15	2,400	10.5
LEC0135B±6EMA	1/20	1.3	165	1.6	15	3,600	15.7
LEC0180B±6EMA	1/20	1.7	220	2.1	15	4,800	20.9
LEC0255B±6EMA	1/20	2.1	275	2.6	15	6,000	26.1
LEC0280B±6EMA	1/20	2.1	275	2.6	15	6,000	26.1

PHYSICAL DATA

Air Defrost

Model	No. of Fans	Coil Inlet OD	Suction OD	Equalizer OD	Drain MPT	Approx. Net Weight	
						lb	kg
LEC0065*±7AMA	1	3/8	1 - 1/8	1/4	3/4	55	25
LEC0095*±7AMA	2	3/8	1 - 1/8	1/4	3/4	105	48
LEC0130*±7AMA	2	3/8	1 - 1/8	1/4	3/4	105	48
LEC0175*±7AMA	3	3/8	1 - 1/8	1/4	3/4	131	59
LEC0200*±7AMA	3	3/8	1 - 1/8	1/4	3/4	146	66
LEC0225*±7AMA	3	3/8	1 - 1/8	1/4	3/4	153	69
LEC0250*±7AMA	4	3/8	1 - 1/8	1/4	3/4	185	84
LEC0285*±7AMA	4	3/8	1 - 1/8	1/4	3/4	203	92
LEC0360*±7AMA	5	3/8	1 - 1/8	1/4	3/4	254	115

Electric Defrost

Model	No. of Fans	Coil Inlet OD	Suction OD	Equalizer OD	Drain MPT	Approx. Net Weight	
						lb	kg
LEC0050B±6EMA	1	3/8	1 - 1/8	1/4	3/4	113	51
LEC0075B±6EMA	2	3/8	1 - 1/8	1/4	3/4	149	68
LEC0120B±6EMA	3	3/8	1 - 1/8	1/4	3/4	197	89
LEC0135B±6EMA	3	3/8	1 - 1/8	1/4	3/4	214	97
LEC0180B±6EMA	4	3/8	1 - 1/8	1/4	3/4	268	122
LEC0255B±6EMA	5	1/2	1 - 1/8	1/4	3/4	296	134
LEC0280B±6EMA	5	1/2	1 - 1/8	1/4	3/4	296	134


Notes:

* = Electrical Code Designator (see Nomenclature details)


All connections are in “

DIMENSIONAL DRAWINGS

A1 Dimensional Drawings

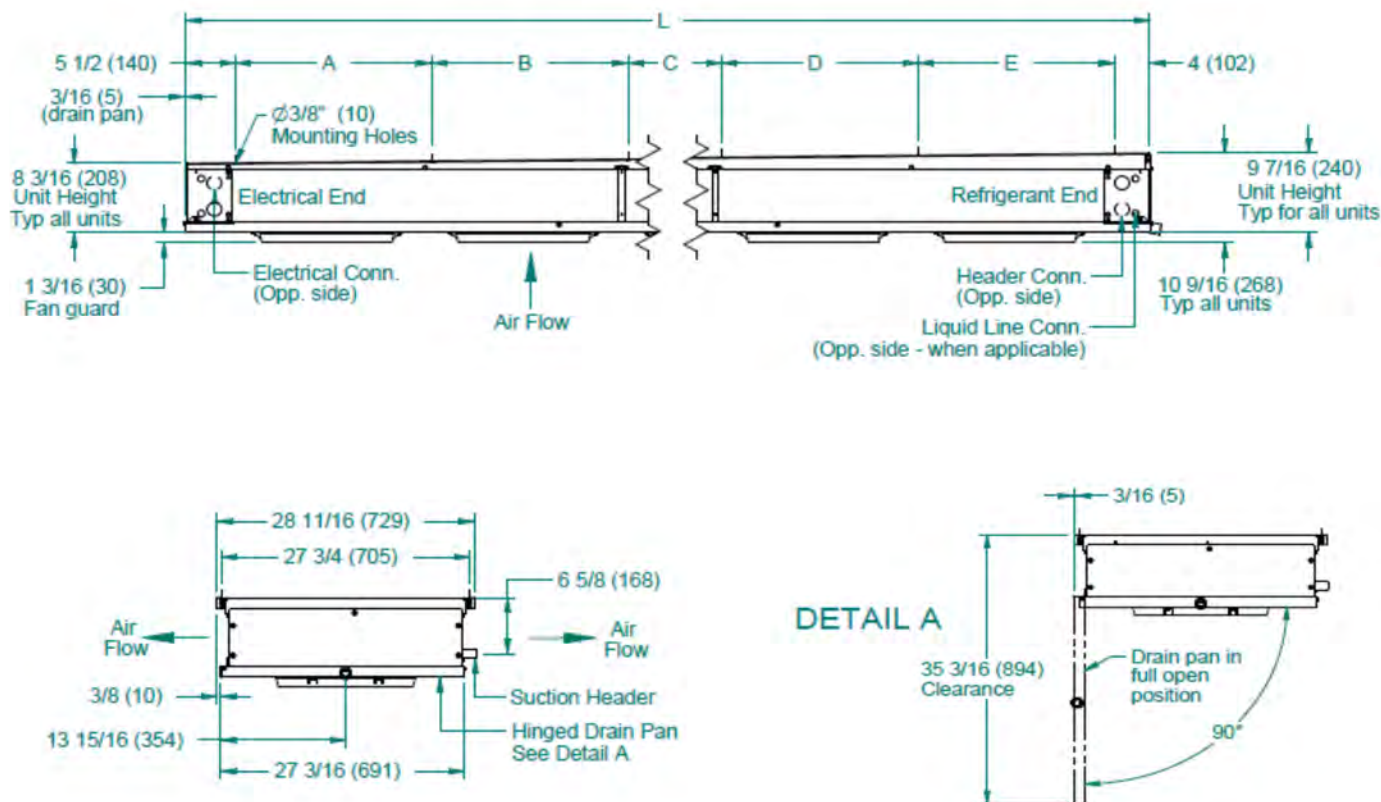

A2L Dimensional Drawings

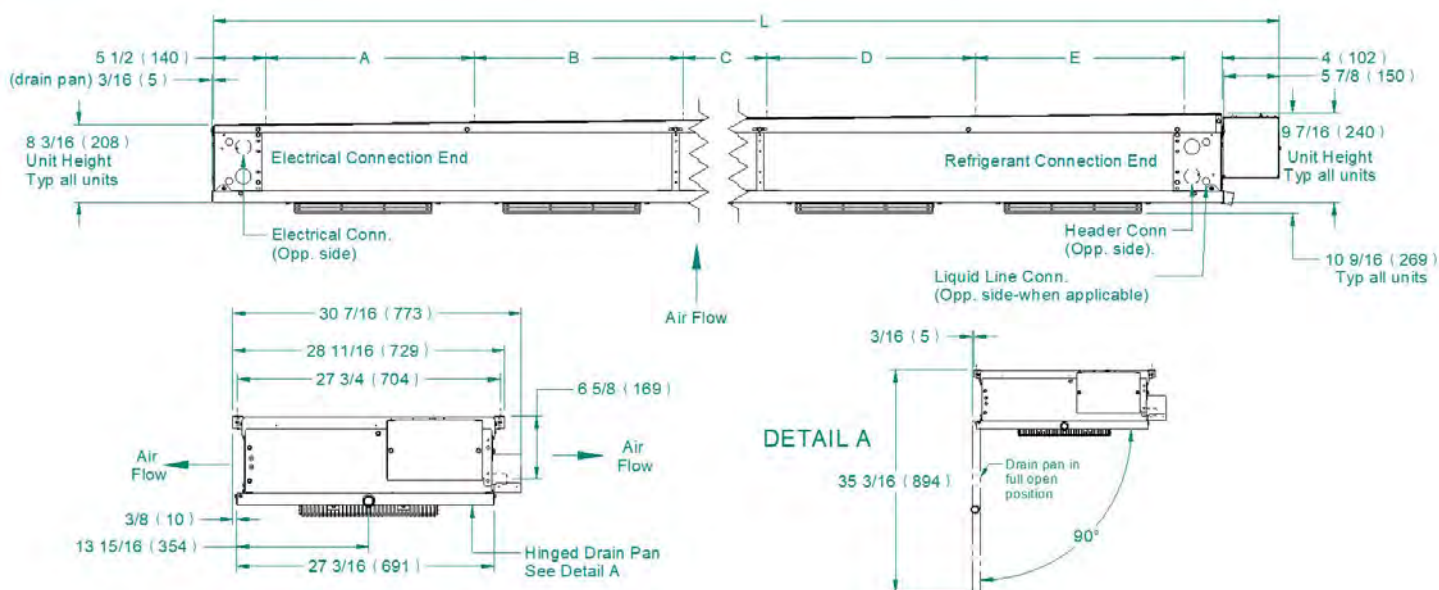

DIMENSIONAL DATA

A1 Dimensional Data For Air Defrost

Model	No. of Fans	L	A	B	C	D	E
		Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)
LEC0065*S7AMA	1	31 1/2 (800)	22 (559)	-	-	-	-
LEC0095*S7AMB	2	53 1/2 (1359)	22 (559)	22 (559)	-	-	-
LEC0130*S7AMA	2	53 1/2 (1359)	22 (559)	22 (559)	-	-	-
LEC0175*S7AMA	3	75 1/2 (1918)	22 (559)	22 (559)	22 (559)	-	-
LEC0200*S7AMA	3	75 1/2 (1918)	22 (559)	22 (559)	22 (559)	-	-
LEC0225*S7AMA	3	75 1/2 (1918)	22 (559)	22 (559)	22 (559)	-	-
LEC0250*S7AMA	4	97 1/2 (2477)	22 (559)	22 (559)	22 (559)	22 (559)	-
LEC0285*S7AMA	4	97 1/2 (2477)	22 (559)	22 (559)	22 (559)	22 (559)	-
LEC0360*S7AMA	5	119 1/2 (3035)	22 (559)	22 (559)	22 (559)	22 (559)	22 (559)

A2L Dimensional Data For Air Defrost

Model	No. of Fans	L	A	B	C	D	E
		Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)
LEC0065*Y7AMA	1	37 1/2 (954)	22 (559)	-	-	-	-
LEC0095*Y7AMA	2	59 1/2 (1513)	22 (559)	22 (559)	-	-	-
LEC0130*Y7AMA	2	59 1/2 (1513)	22 (559)	22 (559)	-	-	-
LEC0175*Y7AMA	3	81 1/2 (2071)	22 (559)	22 (559)	22 (559)	-	-
LEC0200*Y7AMA	3	81 1/2 (2071)	22 (559)	22 (559)	22 (559)	-	-
LEC0225*Y7AMA	3	81 1/2 (2071)	22 (559)	22 (559)	22 (559)	-	-
LEC0250*Y7AMA	4	103 1/2 (2630)	22 (559)	22 (559)	22 (559)	22 (559)	-
LEC0285*Y7AMA	4	103 1/2 (2630)	22 (559)	22 (559)	22 (559)	22 (559)	-
LEC0360*Y7AMA	5	125 1/2 (3189)	22 (559)	22 (559)	22 (559)	22 (559)	22 (559)

Notes:

* = Electrical Code Designator (see Nomenclature details)

DIMENSIONAL DATA

A1 Dimensional Data For Electric Defrost

Model	No. of Fans	L	A	B	C	D	E
		Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)
LEC0050B±6EMA	1	31 1/2 (800)	22 (559)	-	-	-	
LEC0075B±6EMA	2	53 1/2 (1359)	22 (559)	22 (559)	-	-	
LEC0120B±6EMA	3	75 1/2 (1918)	22 (559)	22 (559)	22 (559)	-	
LEC0135B±6EMA	3	75 1/2 (1918)	22 (559)	22 (559)	22 (559)	-	
LEC0180B±6EMA	4	97 1/2 (1918)	22 (559)	22 (559)	22 (559)	22 (559)	
LEC0255B±6EMA	5	119 1/2 (3035)	22 (559)	22 (559)	22 (559)	22 (559)	22 (559)
LEC0280B±6EMA	5	119 1/2 (3035)	22 (559)	22 (559)	22 (559)	22 (559)	22 (559)

A2L Dimensional Data For Electric Defrost

Model	No. of Fans	L	A	B	C	D	E
		Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)
LEC0050BY6EMA	1	37 1/2 (954)	22 (559)	-	-	-	-
LEC0075BY6EMA	2	59 1/2 (1513)	22 (559)	22 (559)	-	-	-
LEC0120BY6EMA	3	81 1/2 (2071)	22 (559)	22 (559)	22 (559)	-	-
LEC0135BY6EMA	3	81 1/2 (2071)	22 (559)	22 (559)	22 (559)	-	-
LEC0180BY6EMA	4	103 1/2 (2630)	22 (559)	22 (559)	22 (559)	22 (559)	-
LEC0255BY6EMA	5	125 1/2 (3189)	22 (559)	22 (559)	22 (559)	22 (559)	22 (559)
LEC0280BY6EMA	5	125 1/2 (3189)	22 (559)	22 (559)	22 (559)	22 (559)	22 (559)

Notes:

* = Electrical Code Designator (see Nomenclature details)

DOE Rated AWEF

 AWEF DATA

Air Defrost

FPI	Model	Cooler						
		R-404A/ R-507A	R-448A/ R-449A	R-407A/ R-407F	R-407C	R-454A	R-454C	R-455A
		AWEF	AWEF	AWEF	AWEF	AWEF	AWEF	AWEF
7	LEC0065*±7AMA	9.0	9.0	9.0	9.0	9.0	9.0	9.0
7	LEC0095*±7AMA	-	9.0	9.0	9.0	9.0	9.0	9.0
7	LEC0130*±7AMA	9.0	9.0	9.0	9.0	9.0	9.0	9.0
7	LEC0175*±7AMA	9.0	9.0	9.0	9.0	9.0	9.0	9.0
7	LEC0200*±7AMA	9.0	9.0	9.0	9.0	9.0	9.0	9.0
7	LEC0225*±7AMA	9.0	9.0	9.0	9.0	9.0	9.0	9.0
7	LEC0250*±7AMA	9.0	9.0	9.0	9.0	9.0	9.0	9.0
7	LEC0285*±7AMA	9.0	9.0	9.0	9.0	9.0	9.0	9.0
7	LEC0360*±7AMA	9.0	9.0	9.0	9.0	9.0	9.0	9.0

Notes:

* = Electrical Code Designator (see Nomenclature details)

± = Refrigerant Designator (see Nomenclature details)

Revision for all Y models (A2L/HFC) is Rev A

DOE Rated AWEF

AWEF DATA

Electric Defrost

FPI	Model	Freezer						
		R-404A/ R-507A	R-448A/ R-449A	R-407A/ R-407F	R-407C	R-454A	R-454C	R-455A
		AWEF	AWEF	AWEF	AWEF	AWEF	AWEF	AWEF
6	LEC0050B±6EMA	3.96	3.99	3.99	3.98	3.98	3.97	3.98
6	LEC0075B±6EMA	4.00	4.04	4.04	4.02	4.03	4.01	4.02
6	LEC0120B±6EMA	4.05	4.12	4.11	4.09	4.10	4.06	4.09
6	LEC0135B±6EMA	4.07	4.15	4.14	4.12	4.13	4.09	4.12
6	LEC0180B±6EMA	4.12	4.15	4.15	4.15	4.15	4.15	4.15
6	LEC0255B±6EMA	4.15	4.15	4.15	4.15	4.15	4.15	4.15
6	LEC0280B±6EMA	4.15	4.15	4.15	4.15	4.15	4.15	4.15

FPI	Model	Cooler						
		R-404A/ R-507A	R-448A/ R-449A	R-407A/ R-407F	R-407C	R-454A	R-454C	R-455A
		AWEF	AWEF	AWEF	AWEF	AWEF	AWEF	AWEF
6	LEC0050B±6EMA	-	9.0	9.0	9.0	9.0	9.0	9.0
6	LEC0075B±6EMA	-	9.0	9.0	9.0	9.0	9.0	9.0
6	LEC0120B±6EMA	9.0	9.0	9.0	9.0	9.0	9.0	9.0
6	LEC0135B±6EMA	9.0	9.0	9.0	9.0	9.0	9.0	9.0
6	LEC0180B±6EMA	9.0	9.0	9.0	9.0	9.0	9.0	9.0
6	LEC0255B±6EMA	9.0	9.0	9.0	9.0	9.0	9.0	9.0
6	LEC0280B±6EMA	9.0	9.0	9.0	9.0	9.0	9.0	9.0

Notes:

* = Electrical Code Designator (see Nomenclature details)

± = Refrigerant Designator (see Nomenclature details)

REPLACEMENT PARTS

Cabinet Components

Part #	Description	No. of Fans
40420101	Drain Pan - Stucco	1
40420201	Drain Pan - Stucco	2
40420301	Drain Pan - Stucco	3
40420401	Drain Pan - Stucco	4
40420501	Drain Pan - Stucco	5

Electrical Components

Part #	Description
22597101	Terminal Board - Air Defrost
22597701	Terminal Board - Electric Defrost
22521901	2SP RELAY 24V
22532001	2SP RELAY 120V
22505201	2SP RELAY 240V
4267W	Defrost Termination / Fan Delay Thermostat

Motor/Fan Blade/Fan Guards

Part #	Description
25326801S	Motor 115/1/60 - 2 Speed EC
25326901S	Motor 208-230/1/60 - 2 Speed EC
5110E	Fan Blade
23106201	Fan Guard - Plastic
5055F	Fan Guard - Metal
41417501	Motor Mount Plate

Electric Components

Part #	Description	No. of Fans
4400S	Coil Heater	1
4401S	Coil Heater	2
4402S	Coil Heater - 4 Row Coil	3
4403S	Coil Heater - 5 Row Coil	3
4404S	Coil Heater	4
4405S	Coil Heater	5

REPLACEMENT PARTS

A2L Refrigeration Detection System

Part #	Description
A2L Refrigeration Detection System (RDS) Kit	
89937701	ASSY-A2L RDS FIELD INSTALL, CM/ LVCM
Field Installed Safety Shut Off Valve	
90050201	ASSY-A2L SOLENOID SHUT-OFF VLV 3/8 LIQ-1
90050202	ASSY-A2L SOLENOID SHUT-OFF VLV 3/8 LIQ-2

Part #	Description
Field Installed Safety CLECK Valve	
90050304	ASSY-A2L CLECK SHUT-OFF VALVE 1-1/8 SUC
90050305	ASSY-A2L CLECK SHUT-OFF VALVE 1-3/8 SUC
A2L Mitigation Sensor (Replacement Part)	
28915901S	A2L SENSOR REPLACEMENT PART
A2L Mitigation Controller (Replacement Part)	
28928001S	A2L CONTROL BOARD
Control Power Transformer	
22529601	TRANSFORMER, 120V-24V 40 VA
22529602	TRANSFORMER, 208/240V-24V 40 VA

STANDARD NOZZLE SELECTION

Air Defrost

Medium Temperature (25°F SST)											
Model	No. of Fans	Distributor Tube (in.)		No. of Circuits	Nozzle Selections						
		OD	Length		R-404A/ R-507A	R-448A/ R-449A	R-407A/ R-407F	R-407C	R-454A	R-454C	R-455A
LEC0065*S7AMA	1	3/16	18	4	L - 1/3	L - 1/2	L - 1/3	L - 1/3	L-1/3	L-1/3	L-1/2
LEC0095*S7AMB	2	3/16	18	4	L - 1/2	L - 3/4	L - 1/2	L - 1/2	L-1/2	L-1/2	L-3/4
LEC0130*S7AMA	2	3/16	18	4	L - 3/4	L - 1	L - 3/4	L - 3/4	L-3/4	L-3/4	L-1
LEC0175*S7AMA	3	3/16	18	4	L - 3/4	L - 1 1/2	L - 1	L - 1	L-1	L-1	L-1 1/2
LEC0200*S7AMA	3	3/16	18	6	L - 1	L - 1 1/2	L - 1	L - 1	L-1 1/2	L-1	L-1 1/2
LEC0225*S7AMA	3	3/16	24	8	L - 1	L - 2	L - 1 1/2	L - 1 1/2	L-1 1/2	L-1 1/2	L-1 1/2
LEC0250*S7AMA	4	3/16	18	6	L - 1 1/2	L - 2	L - 1 1/2	L - 1 1/2	L-1 1/2	L-1 1/2	L-2
LEC0285*S7AMA	4	3/16	24	8	L - 1 1/2	L - 2 1/2	L - 1 1/2	L - 1 1/2	L-1 1/2	L-1 1/2	L-2
LEC0360*S7AMA	5	3/16	18	10	L - 2	L - 3	L - 2	L - 2	L-2	L-2	L-2 1/2

Electric Defrost

Low Temperature (-20°F SST)											
Model	No. of Fans	Distributor Tube (in.)		No. of Circuits	Nozzle Selections						
		OD	Length		R-404A/ R-507A	R-448A/ R-449A	R-407A/ R-407F	R-407C	R-454A	R-454C	R-455A
LEC0050BS6EMA	1	3/16	18	4	L - 1/2	L - 1	L - 3/4	L - 1/2	L - 3/4	L - 3/4	L - 3/4
LEC0075BS6EMA	2	3/16	18	4	L - 3/4	L - 1 1/2	L - 1	L - 1	L - 1	L - 3/4	L - 1
LEC0120BS6EMA	3	3/16	18	6	L - 1 1/2	L - 2	L - 1 1/2	L - 1 1/2	L - 1 1/2	L - 1 1/2	L - 1 1/2
LEC0135BS6EMA	3	3/16	24	8	L - 2	L - 2 1/2	L - 1 1/2	L - 1 1/2	L - 1 1/2	L - 1 1/2	L - 2
LEC0180BS6EMA	4	3/16	18	10	L - 2	L - 4	L - 2 1/2	L - 2	L - 2	L - 2	L - 2 1/2
LEC0255BS6EMA	5	3/16	18	10	L - 2 1/2	L - 4	L - 3	L - 3	L - 2 1/2	L - 2 1/2	L - 2 1/2
LEC0280BS6EMA	5	3/16	18	10	L - 2 1/2	L - 4	L - 3	L - 3	L - 2 1/2	L - 2 1/2	L - 3

Notes:

* = Electrical Code Designator (see Nomenclature details)

This image shows a full page of blank, lined paper. It features approximately 20 evenly spaced horizontal grey lines across its entire width, providing a guide for handwriting or typing. The background is a clean, solid white color.



2175 West Park Place Blvd.

Stone Mountain, GA 30087

Phone: 800.537.7775 · Fax: 770.465.5900

heatcraftspd.com

Since product improvement is a continuing effort, we reserve the right to make changes in specifications without notice.

LK-CM-0725 | Version 009

©2025 Heatcraft Refrigeration Products LLC