



LK-LUC | MARCH 2025
Replaces January 2024

LARGE UNIT COOLER EVAPORATOR

Technical Guide

Now including A2L models meeting minimum AWEF



TABLE OF CONTENTS

3	Features & Benefits
4	Nomenclature
5	Preferred Option Packages
Models Meeting DOE Minimum AWEF	
7	A2L and A1 Air Defrost Performance Data
7	A2L Air Defrost 60 Hz
8	A1 Air Defrost 60 Hz
9	Air Defrost Specifications
10	A2L and A1 Electric Defrost Performance Data
10	A2L Low Temperature Electric Defrost 60 Hz
11	A2L Medium Temperature Electric Defrost 60 Hz
12	A1 Low Temperature Electric Defrost 60 Hz
13	A1 Medium Temperature Electric Defrost 60 Hz
14	Electric Defrost Specifications
15	A2L and A1 Hot Gas Defrost Performance Data
15	A2L Low Temperature Hot Gas Defrost 60 Hz/Electric Drain Pan
16	A2L Low Temperature Hot Gas Defrost 60 Hz/Hot Gas Drain Pan
17	A2L Medium Temperature Hot Gas Defrost 60 Hz/Electric Drain Pan
18	A2L Medium Temperature Hot Gas Defrost 60 Hz/Hot Gas Drain Pan
19	A1 Low Temperature Hot Gas Defrost 60 Hz
20	A1 Medium Temperature Hot Gas Defrost 60 Hz
21	Hot Gas Defrost Specifications
Models Not Meeting DOE Minimum AWEF	
23	A2L and A1 Air Defrost Performance Data
23	A2L Air Defrost 60 Hz
24	A2L Air Defrost 50 Hz
25	A1 Air Defrost 60 Hz
26	A1 Air Defrost 50 Hz
27-30	Air Defrost Specifications
31	A2L and A1 Electrical Defrost Performance Data
31-32	A2L Low Temperature Electric Defrost 60 Hz
33-34	A2L Low Temperature Electric Defrost 50 Hz
35-36	A2L Electric Defrost High CFM 60 Hz
37-38	A1 Low Temperature Electric Defrost 60 Hz
39-40	A1 Low Temperature Electric Defrost 50 Hz
41-42	A1 Low Temperature Electric Defrost High CFM 60 Hz
43-51	Electric Defrost Specifications
52	A2L and A1 Hot Gas Defrost Performance Data
52-53	A2L Low Temperature Hot Gas Defrost 60 Hz/Electric Drain Pan
54-55	A2L Low Temperature Hot Gas Defrost 60 Hz/Hot Gas Drain Pan
56-57	A2L Hot Gas Defrost 50 Hz/Electric Drain Pan
58-59	A2L Hot Gas Defrost 50 Hz/Hot Gas Drain Pan
60-61	A2L Hot Gas Defrost High CFM 60 Hz/Electric Drain Pan
62-63	A2L Hot Gas Defrost High CFM 60 Hz/Hot Gas Drain Pan
64-65	A1 Low Temperature Hot Gas Defrost 60 Hz
66-67	A1 Hot Gas Defrost 50 Hz
68-69	A1 Hot Gas Defrost High CFM 60 Hz
70-78	Hot Gas Defrost Specifications
79	Physical Data
82	Dimensional Drawings
84	AWEF Data
84	Air Defrost
85-86	Medium and Low Temperature Electric Defrost
87-88	Medium and Low Temperature Hot Gas Defrost
89	Standard Nozzle Selection
89-90	Meeting AWEF Models
91-92	Not Meeting AWEF Models
93	Replacement Parts



FEATURES & BENEFITS

GENERAL FEATURES

- Mill finish aluminum provides an attractive design and structurally sound cabinet
- Thermo-Flex (with five-year limited warranty) is innovative, eliminates leaks, and reduces risk of refrigerant loss
- Liquid line solenoid wiring harness for faster installation
- Suction Schrader fitting for easier suction temperature measurement
- Hinged drain pan and access panels for easy servicing
- Adjustable defrost control can be customized per application
- Long air throw is ideal for large warehouse and industrial applications
- Standardized terminal board for easier field wiring
- Improved wire management and routing for easier installation and service
- Complete hot gas defrost model offering meets more applications
- Quick reference QR code providing access to relevant product documentation

ADDITIONAL FEATURES - MODELS MEETING MINIMUM AWEF

- 2 Speed EC motor, totally enclosed
- 850 RPM lower noise motor
- Balance heater load for electric defrost
- Air defrost terminal block

CONTROL OPTIONS

- intelliGen™ Refrigeration Controller (iRC) units come with a factory mounted controller, tested and calibrated with an electronic expansion valve, pressure transducer, temperature sensors, control board and user interface. Standard features include Door Sensor, Product Load Input and Alarm Output.
- Optional factory or field installable intelliGen Multi-System Control Card (MSC) enables lead-lag control, Wi-Fi Direct connection, local and remote monitoring on any phone, tablet or PC.
- Optional factory or field installable intelliGen Webserver Card (iWC) enables local and remote monitoring on any phone, tablet or PC.
- Optional factory or field installable intelliGen Integration Card (iIC) enables connectivity to BACnet and Modbus.

OPTIONS

- High CFM motor and fan combinations (208-230/3/60 and 460/3/60) *
- Totally enclosed motors (208-230/3/60 and 460/3/60)
- Low temperature motors for blast cooling and freezing (for room temps -31°F to -50°F) *
- Units available with Bronze-Glow coil coating (air, electric and hot gas)
- Units available with copper fins (6 FPI models only)
- Air defrost units available with polyester coated fins or various coil coating options
- Long air throw collars for large warehouse and industrial applications
- Insulated drain pan
- Factory installed mounted components are available in these configurations:
 - Pre-assembled units come with mounted TXV, liquid line solenoid valve and room thermostat
 - Mounted TXV
 - Mounted TXV and solenoid valve
 - Mounted room thermostat
- Defrost termination control
- Mounted fusing for motors and heaters
- More factory mounted features for easier field installation available, consult factory for details

A2L FEATURES AND OPTIONS


- A2L and A1 dual refrigerants compatible models
- Factory mounted Refrigerant Detection System (RDS)
 - Mounted refrigerant leak detection sensors
 - Mounted refrigerant leak mitigation controller
 - Early warning leak detection with relay output for external alert devices
 - Mitigation alarm with relay output for external alarm devices
- Base model option available with or without RDS
- Field mounted Refrigerant Detection System kit available.
- Protection grill for evaporator coil
- Piping protection guards for refrigerant line connections
- Red tags on service valves and connection points as indicators for A2L refrigerants
- A2L labels to meet regulatory requirement

OUTSTANDING FEATURES

2-Speed EC motor
improves efficiency and provides more energy savings

Hinged Access Panels allow for easy access to components

Refrigerant Detection System (RDS) factory mounted and field mounted options, with early warning alert and mitigation alarm outputs

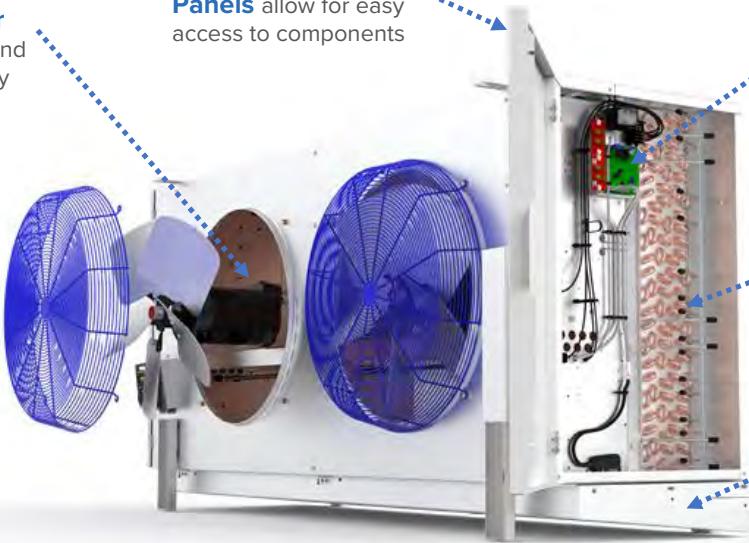

Balance Heater Load
improves reliability and generates more energy savings

Hinged Drain Pan
improves access to service and clean the drain pan and coil

NOMENCLATURE

PRODUCT IDENTIFIER
E = Evaporator

NOMINAL CAPACITY
 $x100 = \text{BTUH}$

APPLICATION
Y = A2L/HFC Refrigerants
S = HFC Refrigerants
G = Glycol[†]
C = CO₂⁺

DEFROST STYLE
A = Air Defrost
E = Electric Defrost
H = Hot Gas Defrost

DESIGN REVISION

L E H 0630* D Y 6 A M A B0000

BRAND
L = Larkin

EVAPORATOR STYLE
H = High Profile (Large Unit Cooler, a.k.a. LUC)

ELECTRICAL CODE
B = 208-230/1/60
C = 208-230/3/60
D = 460/3/60
M = 460/1/60
E = 575/3/60
X = 380-400/3/50

FINS PER INCH (FPI)
6
4
8

MOTOR TYPE
M = 2-Speed EC
V = Variable speed EC Rail Mount
H = High CFM Rail Mount
P = PSC Open Drip Proof Rail Mount
T = 3 Phase AC Totally Enclosed Rail Mount
Y = 3 Phase AC Open Drip Proof Rail Mount

FACTORY-INSTALLED OPTION PACKAGES
B#### = A2L Base Model and HFC Preferred Packages
G#### = A2L Preferred Packages
D#### = A la Carte Options
Y#### = Custom Option Packages

* Models meet minimum AWEF have a model capacity digit that ends with "0", or "5". Models do not meet minimum AWEF have a model capacity digit ending with "3"

See the model capacity and AWEF data tables for applicable refrigerants.

[†] Call factory for Glycol and CO₂ models, Engineer To Order process required.

PREFERRED OPTION PACKAGES

Package	Description (standard base model features + indicated options below)
B0000	A2L/HFC Base Model
G0000	Standard base with RDS
G0270	Standard base with RDS + intelliGen™ (R455A)
G0271	Standard base with RDS + intelliGen™ (R454C)
G0272	Standard base with RDS + intelliGen™ (R454A)
G0470	Standard base with RDS + Mounted TXV + Solenoid Valve (R455A)
G0471	Standard base with RDS + Mounted TXV + Solenoid Valve (R454C)
G0472	Standard base with RDS + Mounted TXV + Solenoid Valve (R454A)
B0250	Standard base + intelliGen™ (R404A)
B0251	Standard base + intelliGen™ (R448A/R449A)
B0252	Standard base + intelliGen™ (R407A/F)
B0253	Standard base + intelliGen™ (R407C)
B0450	Standard base + Mounted TXV (R404A)
B0451	Standard base + Mounted TXV + Solenoid (R404A)
B0453	Standard base + Mounted TXV (R407A)
B0454	Standard base + Mounted TXV + Solenoid (R407A)
B0456	Standard base + Mounted TXV (R448A)
B0457	Standard base + Mounted TXV + Solenoid (R448A)
B0459	Standard base + Mounted TXV (R407C)
B0460	Standard base + Mounted TXV + Solenoid (R407C)
D#####	A la Carte Options
Y#####	Customized options

Capacity Correction Factors

Electric and Hot Gas Defrost Unit Only					
Saturated Suction Temperature °F	20	-10	-20	-30	-40
Saturated Suction Temperature °C	-7	-23	-29	-34	-40
Multiply Capacity By	1.15	1.04	1.00	0.9	0.8

MODELS MEETING DOE MINIMUM AWEF

Models Meeting DOE Minimum AWEF

SPECIFICATIONS

Air Defrost - 60 Hz

Please consult AWEF table on page 84 to confirm model meets DOE minimum AWEF

FPI	Model	Fan Diameter	HP	2-Speed EC Motors							
				208-230/3/60				460/3/60			
		in (mm)		Amps	Watts	MCA	MOPD	Amps	Watts	MCA	MOPD
6	LEH0570*±6AMA	24 (610)	3/4	4.4	1,119	5.0	15	2.2	1,119	2.5	15
6	LEH0700*±6AMA	24 (610)	3/4	4.4	1,119	5.0	15	2.2	1,119	2.5	15
6	LEH0755*±6AMA	24 (610)	3/4	4.4	1,119	5.0	15	2.2	1,119	2.5	15
6	LEH0900*±6AMA	24 (610)	3/4	6.6	1,679	7.2	15	3.3	1,679	3.6	15
6	LEH1080*±6AMA	24 (610)	3/4	6.6	1,679	7.2	15	3.3	1,679	3.6	15
6	LEH1245*±6AMA	24 (610)	3/4	6.6	1,679	7.2	15	3.3	1,679	3.6	15
6	LEH1445*±6AMA	24 (610)	3/4	8.8	2,238	9.4	15	4.4	2,238	4.7	15
6	LEH1655*±6AMA	24 (610)	3/4	8.8	2,238	9.4	15	4.4	2,238	4.7	15
6	LEH0620*±6AMA	30 (763)	1-1/2	3.7	1,119	4.6	20	1.9	1,119	2.4	15
6	LEH0730*±6AMA	30 (763)	1-1/2	3.7	1,119	4.6	20	1.9	1,119	2.4	15
8	LEH0840*±8AMA	30 (763)	1-1/2	3.7	1,119	4.6	20	1.9	1,119	2.4	15
6	LEH1250*±6AMA	30 (763)	1-1/2	7.4	2,237	8.3	20	3.8	2,237	4.3	15
6	LEH1470*±6AMA	30 (763)	1-1/2	7.4	2,237	8.3	20	3.8	2,237	4.3	15
6	LEH1870*±6AMA	30 (763)	1-1/2	11.1	3,356	12.0	20	5.7	3,356	6.2	15
6	LEH2200*±6AMA	30 (763)	1-1/2	11.1	3,356	12.0	20	5.7	3,356	6.2	15

Notes:

* = Electrical Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Meeting DOE Minimum AWEF

SPECIFICATIONS

Electric Defrost - 60 Hz

Please consult AWEF table on page 85 to confirm model meets DOE minimum AWEF

FPI	Model	Fan Diameter	HP	2-Speed EC Motor								Defrost Heaters		
		in (mm)		Amps	Watts	MCA	MOPD	Amps	Watts	MCA	MOPD	Watts	208-230/3/60	460/3/60
6	LEH0540*±6EMA	24 (610)	3/4	4.4	1,119	5.0	15	2.2	1,119	2.5	15	15,100	42.0	21.1
6	LEH0630*±6EMA	24 (610)	3/4	4.4	1,119	5.0	15	2.2	1,119	2.5	15	15,100	42.0	21.1
6	LEH0805*±6EMA	24 (610)	3/4	6.6	1,679	7.2	15	3.3	1,679	3.6	15	19,700	54.7	27.5
6	LEH0925*±6EMA	24 (610)	3/4	6.6	1,679	7.2	15	3.3	1,679	3.6	15	19,700	54.7	27.5
6	LEH1125*±6EMA	24 (610)	3/4	8.8	2,238	9.4	15	4.4	2,238	4.7	15	27,000	75.0	37.7
6	LEH1210*±6EMA	24 (610)	3/4	8.8	2,238	9.4	15	4.4	2,238	4.7	15	27,000	75.0	37.7
4	LEH0480*±4EMA	24 (610)	3/4	4.4	1,119	5.0	15	2.2	1,119	2.5	15	15,100	42.0	21.1
4	LEH0565*±4EMA	24 (610)	3/4	4.4	1,119	5.0	15	2.2	1,119	2.5	15	15,100	42.0	21.1
4	LEH0730*±4EMA	24 (610)	3/4	6.6	1,679	7.2	15	3.3	1,679	3.6	15	19,700	54.7	27.5
4	LEH0845*±4EMA	24 (610)	3/4	6.6	1,679	7.2	15	3.3	1,679	3.6	15	19,700	54.7	27.5
4	LEH1010*±4EMA	24 (610)	3/4	8.8	2,238	9.4	15	4.4	2,238	4.7	15	27,000	75.0	38.0
4	LEH1085*±4EMA	24 (610)	3/4	8.8	2,238	9.4	15	4.4	2,238	4.7	15	27,000	75.0	37.7
6	LEH1340*±6EMA	30 (763)	1-1/2	11.1	3,356	12.0	20	5.7	3,356	6.2	15	21,400	64.2	32.1
6	LEH1560*±6EMA	30 (763)	1-1/2	11.1	3,356	12.0	20	5.7	3,356	6.2	15	21,400	64.2	32.1
6	LEH1820*±6EMA	30 (763)	1-1/2	11.1	3,356	12.0	20	5.7	3,356	6.2	15	33,600	87.2	47.5
6	LEH2330*±6EMA	30 (763)	1-1/2	14.8	4,474	15.7	25	7.6	4,474	8.1	15	49,850	128.4	70

Notes:

* = Electrical Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Meeting DOE Minimum AWEF

SPECIFICATIONS

Hot Gas Defrost - 60 Hz

Please consult AWEF table on page 88 to confirm model meets DOE minimum AWEF

FPI	Model	Fan Diameter	HP	2-Speed EC Motors								Drain Pan Heaters [†]		
				208-230/3/60				460/3/60				Watts	Total Amps	
		in (mm)		Amps	Watts	MCA	MOPD	Amps	Watts	MCA	MOPD		208-230/3/60	460/1/60
6	LEH0540*±6HMA	24 (610)	3/4	4.4	1,119	5.0	15	2.2	1,119	2.5	15	2,100	9.2	4.6
6	LEH0630*±6HMA	24 (610)	3/4	4.4	1,119	5.0	15	2.2	1,119	2.5	15	2,100	9.2	4.6
6	LEH0805*±6HMA	24 (610)	3/4	6.6	1,679	7.2	15	3.3	1,679	3.6	15	2,700	11.8	5.9
6	LEH0925*±6HMA	24 (610)	3/4	6.6	1,679	7.2	15	3.3	1,679	3.6	15	2,700	11.8	5.9
6	LEH1125*±6HMA	24 (610)	3/4	8.8	2,238	9.4	15	4.4	2,238	4.7	15	4,000	17.4	8.7
6	LEH1210*±6HMA	24 (610)	3/4	8.8	2,238	9.4	15	4.4	2,238	4.7	15	4,000	17.4	8.7
4	LEH0480*±4HMA	24 (610)	3/4	4.4	1,119	5.0	15	2.2	1,119	2.5	15	2,100	9.2	4.6
4	LEH0565*±4HMA	24 (610)	3/4	4.4	1,119	5.0	15	2.2	1,119	2.5	15	2,100	9.2	4.6
4	LEH0730*±4HMA	24 (610)	3/4	6.6	1,679	7.2	15	3.3	1,679	3.6	15	2,700	11.8	5.9
4	LEH0845*±4HMA	24 (610)	3/4	6.6	1,679	7.2	15	3.3	1,679	3.6	15	2,700	11.8	5.9
4	LEH1010*±4HMA	24 (610)	3/4	8.8	2,238	9.4	15	4.4	2,238	4.7	15	4,000	17.4	8.7
4	LEH1085*±4HMA	24 (610)	3/4	8.8	2,238	9.4	15	4.4	2,238	4.7	15	4,000	17.4	8.7
6	LEH1340*±6HMA	30 (763)	1-1/2	11.1	3,356	12.0	20	5.7	3,356	6.2	15	4,000	17.4	8.7
6	LEH1560*±6HMA	30 (763)	1-1/2	11.1	3,356	12.0	20	5.7	3,356	6.2	15	4,000	17.4	8.7
6	LEH1820*±6HMA	30 (763)	1-1/2	11.1	3,356	12.0	20	5.7	3,356	6.2	15	4,200	18.2	9.1
6	LEH2330*±6HMA	30 (763)	1-1/2	14.8	4,474	15.7	25	7.6	4,474	8.1	15	6,450	23.2**	14.0

Notes:

* = Electrical Code Designator (see Nomenclature details)

** = This model with 3-phase drain pan heaters

[†] = Hot gas drain pan available

± = Refrigerant designator Y or S (see Nomenclature details)

MODELS NOT MEETING DOE MINIMUM AWEF

Models Not Meeting DOE Minimum AWEF

SPECIFICATIONS

Air Defrost - 60 Hz

FPI	Model	Fan Diameter	HP	3 Phase AC Open Drip Proof Rail Mount							
				208-230/3/60				460/3/60			
				Amps	Watts	MCA	MOPD	Amps	Watts	MCA	MOPD
6	LEH0553*±6A^A	24 (610)	3/4	8.0	1,119.0	9.0	20.0	4.0	1,119.0	4.5	15.0
6	LEH0723*±6A^A	24 (610)	3/4	8.0	1,119.0	9.0	20.0	4.0	1,119.0	4.5	15.0
6	LEH0743*±6A^A	24 (610)	3/4	12.0	1,678.5	13.0	25.0	6.0	1,678.5	6.5	15.0
6	LEH0933*±6A^A	24 (610)	3/4	12.0	1,678.5	13.0	25.0	6.0	1,678.5	6.5	15.0
6	LEH1053*±6A^A	24 (610)	3/4	16.0	2,238.0	17.0	30.0	8.0	2,238.0	8.5	15.0
6	LEH1313*±6A^A	24 (610)	3/4	16.0	2,238.0	17.0	30.0	8.0	2,238.0	8.5	15.0
6	LEH1333*±6A^A	30 (763)	1	13.8	2,237.0	15.0	25.0	6.9	2,237.0	7.5	15.0
6	LEH1623*±6A^A	30 (763)	1	13.8	2,237.0	15.0	25.0	6.9	2,237.0	7.5	15.0
6	LEH1873*±6A^A	30 (763)	1-1/2	19.8	3,356.0	21.5	40.0	9.9	3,356.0	10.7	20.0
6	LEH2203*±6A^A	30 (763)	1-1/2	21.0	3,356.0	22.8	40.0	10.5	3,356.0	11.4	20.0
6	LEH2553*±6A^A	30 (763)	1-1/2	26.4	4,474.0	28.1	45.0	10.5	4,474.0	11.2	15.0
6	LEH2883*±6A^A	30 (763)	1-1/2	28.0	4,474.0	29.8	45.0	13.2	4,474.0	14.0	20.0
8	LEH2513*±8A^A	30 (763)	1-1/2	21.0	3,356.0	22.8	40.0	14.0	3,356.0	15.2	25.0
8	LEH2953*±8A^A	30 (763)	1-1/2	26.4	4,474.0	28.1	45.0	13.2	4,474.0	14.0	20.0
8	LEH3283*±8A^A	30 (763)	1-1/2	28.0	4,474.0	29.8	45.0	14.0	4,474.0	14.9	25.0

FPI	Model	Fan Diameter	HP	3 Phase AC Totally Enclosed Rail Mount							
				208-230/3/60				460/3/60			
				Amps	Watts	MCA	MOPD	Amps	Watts	MCA	MOPD
6	LEH0553*±6A^A	24 (610)	1	6.0	1,492.0	6.8	20.0	3.0	1,492.0	3.4	15.0
6	LEH0723*±6A^A	24 (610)	1	6.0	1,492.0	6.8	20.0	3.0	1,492.0	3.4	15.0
6	LEH0743*±6A^A	24 (610)	1	9.0	2,238.0	9.8	20.0	4.5	2,238.0	4.9	15.0
6	LEH0933*±6A^A	24 (610)	1	9.0	2,238.0	9.8	20.0	4.5	2,238.0	4.9	15.0
6	LEH1053*±6A^A	24 (610)	1	12.0	2,984.0	12.8	20.0	6.0	2,984.0	6.4	15.0
6	LEH1313*±6A^A	24 (610)	1	12.0	2,984.0	12.8	20.0	6.0	2,984.0	6.4	15.0
6	LEH1333*±6A^A	30 (763)	1-1/2	19.8	3,356.0	21.5	40.0	9.9	3,356.0	10.7	20.0
6	LEH1623*±6A^A	30 (763)	1-1/2	19.8	3,356.0	21.5	40.0	9.9	3,356.0	10.7	20.0
6	LEH1873*±6A^A	30 (763)	1-1/2	19.8	3,356.0	21.5	40.0	9.9	3,356.0	10.7	20.0
6	LEH2203*±6A^A	30 (763)	1-1/2	19.8	3,356.0	21.5	40.0	9.9	3,356.0	10.7	20.0
6	LEH2553*±6A^A	30 (763)	1-1/2	26.4	4,474.0	28.1	45.0	13.2	4,474.0	14.0	20.0
6	LEH2883*±6A^A	30 (763)	1-1/2	26.4	4,474.0	28.1	45.0	13.2	4,474.0	14.0	20.0
8	LEH2513*±8A^A	30 (763)	1-1/2	19.8	3,356.0	21.5	40.0	9.9	3,356.0	10.7	20.0
8	LEH2953*±8A^A	30 (763)	1-1/2	26.4	4,474.0	28.1	45.0	13.2	4,474.0	14.0	20.0
8	LEH3283*±8A^A	30 (763)	1-1/2	26.4	4,474.0	28.1	45.0	13.2	4,474.0	14.0	20.0

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

SPECIFICATIONS

Air Defrost - 60 Hz

FPI	Model	Fan Diameter	3 Phase AC Totally Enclosed Rail Mount				
			HP	575/3/60			
		in (mm)		Amps	Watts	MCA	MOPD
6	LEH0553*±6A^A	24 (610)	1/2	1.8	746.0	2.0	15.0
6	LEH0723*±6A^A	24 (610)	1/2	1.8	746.0	2.0	15.0
6	LEH0743*±6A^A	24 (610)	1/2	2.7	1,119.0	2.9	15.0
6	LEH0933*±6A^A	24 (610)	1/2	2.7	1,119.0	2.9	15.0
6	LEH1053*±6A^A	24 (610)	1/2	3.6	1,492.0	3.8	15.0
6	LEH1313*±6A^A	24 (610)	1/2	3.6	1,492.0	3.8	15.0
6	LEH2203*±6A^A	30 (763)	1-1/2	8.4	3,356.0	9.1	15.0
6	LEH2883*±6A^A	30 (763)	1-1/2	11.2	4,474.0	11.9	20.0
8	LEH2513*±8A^A	30 (763)	1-1/2	8.4	3,356.0	9.1	15.0
8	LEH3283*±8A^A	30 (763)	1-1/2	11.2	4,474.0	11.9	20.0

FPI	Model	Fan Diameter	3 Phase AC Open Drip Proof Rail Mount				
			HP	575/3/60			
		in (mm)		Amps	Watts	MCA	MOPD
6	LEH1333*±6A^A	30 (763)	1-1/2	7.8	2,237.0	8.5	15.0
6	LEH1623*±6A^A	30 (763)	1-1/2	7.8	2,237.0	8.5	15.0
6	LEH1873*±6A^A	30 (763)	1-1/2	7.8	3,356.0	8.5	15.0
6	LEH2553*±6A^A	30 (763)	1-1/2	10.4	4,474.0	11.1	15.0
8	LEH2953*±8A^A	30 (763)	1-1/2	10.4	4,474.0	11.1	15.0

FPI	Model	Fan Diameter	PSC Open Drip Proof Rail Mount								
			HP	208-230/1/60				460/1/60			
		in (mm)		Amps	Watts	MCA	MOPD	Amps	Watts	MCA	MOPD
6	LEH0553*±6A^A	24 (610)	1/2	6.4	746.0	7.2	20.0	3.4	746.0	3.8	15.0
6	LEH0723*±6A^A	24 (610)	1/2	6.4	746.0	7.2	20.0	3.4	746.0	3.8	15.0
6	LEH0743*±6A^A	24 (610)	1/2	9.6	1,119.0	10.4	20.0	5.1	1,119.0	5.5	15.0
6	LEH0933*±6A^A	24 (610)	1/2	9.6	1,119.0	10.4	20.0	5.1	1,119.0	5.5	15.0
6	LEH1053*±6A^A	24 (610)	1/2	12.8	1,492.0	13.6	20.0	6.8	1,492.0	7.2	15.0
6	LEH1313*±6A^A	24 (610)	1/2	12.8	1,492.0	13.6	20.0	6.8	1,492.0	7.2	15.0

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

SPECIFICATIONS

Air Defrost - 50 Hz

FPI	Model	Fan Diameter	380-400/3/50									
			HP	3 Phase AC Open Drip Proof Rail Mount				HP	3 Phase AC Totally Enclosed Rail Mount			
		in (mm)		Amps	Watts	MCA	MOPD		Amps	Watts	MCA	MOPD
6	LEH0553*±6A^A	24 (610)	3/4	4.0	1,119.0	4.5	15.0	1	4.6	1,492.0	5.2	15.0
6	LEH0723*±6A^A	24 (610)	3/4	4.0	1,119.0	4.5	15.0	1	4.6	1,492.0	5.2	15.0
6	LEH0743*±6A^A	24 (610)	3/4	6.0	1,678.5	6.5	15.0	1	6.9	2,238.0	7.5	15.0
6	LEH0933*±6A^A	24 (610)	3/4	6.0	1,678.5	6.5	15.0	1	6.9	2,238.0	7.5	15.0
6	LEH1053*±6A^A	24 (610)	3/4	8.0	2,238.0	8.5	15.0	1	9.2	2,984.0	9.6	15.0
6	LEH1313*±6A^A	24 (610)	3/4	8.0	2,238.0	8.5	15.0	1	9.2	2,984.0	9.6	15.0
6	LEH1333*±6A^A	30 (763)	1	6.9	2,237.0	7.5	15.0	1-1/2	7.8	3,356.0	8.5	15.0
6	LEH1623*±6A^A	30 (763)	1	6.9	2,237.0	7.5	15.0	1-1/2	7.8	3,356.0	8.5	15.0
6	LEH1873*±6A^A	30 (763)	1-1/2	9.9	3,356.0	10.7	20.0	1-1/2	7.8	3,356.0	8.5	15.0
6	LEH2203*±6A^A	30 (763)	1-1/2	10.5	3,356.0	11.4	20.0	1-1/2	7.8	3,356.0	8.5	15.0
6	LEH2553*±6A^A	30 (763)	1-1/2	13.2	4,474.0	14.0	20.0	1-1/2	10.4	4,474.0	11.1	15.0
6	LEH2883*±6A^A	30 (763)	1-1/2	14.0	4,474.0	14.9	25.0	1-1/2	10.4	4,474.0	11.1	15.0
8	LEH2513*±8A^A	30 (763)	1-1/2	10.5	3,356.0	11.4	20.0	1-1/2	7.8	3,356.0	8.5	15.0
8	LEH2953*±8A^A	30 (763)	1-1/2	13.2	4,474.0	14.0	20.0	1-1/2	10.4	4,474.0	11.1	15.0
8	LEH3283*±8A^A	30 (763)	1-1/2	14.0	4,474.0	14.9	25.0	1-1/2	10.4	4,474.0	11.1	15.0

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A2L PERFORMANCE DATA

Application Capacity: Low Temperature Electric Defrost - 60 Hz

FPI	Model	R-455A			R-454C			Fan Data				Air Throw	
		Application Capacity ¹			Application Capacity ¹								
		10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.	10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.	No. of Fans	Dia. in (mm)	CFM	m³H	Standard	w/Collar
		BTUH	Watts	Sq. Ft.	BTUH	Watts	Sq. Ft.					ft (m)	ft (m)
6	LEH0423*Y6E^A	46,600	13,700	166	40,700	11,900	246	2	24 (610)	9,000	15,291	70 (21)	85 (26)
6	LEH0513*Y6E^A	58,000	17,000	203	50,600	14,800	300	2	24 (610)	9,000	15,291	70 (21)	85 (26)
6	LEH0573*Y6E^A	65,600	19,200	174	57,300	16,800	258	3	24 (610)	12,600	21,408	70 (21)	85 (26)
6	LEH0713*Y6E^A	77,000	22,600	209	67,200	19,700	310	3	24 (610)	12,600	21,408	70 (21)	85 (26)
6	LEH0763*Y6E^A	84,600	24,800	375	73,900	21,700	1,111	4	24 (610)	16,800	28,543	70 (21)	85 (26)
6	LEH0963*Y6E^A	99,800	29,200	419	87,200	25,600	1,241	4	24 (610)	16,800	28,543	70 (21)	85 (26)
4	LEH0373*Y4E^A	40,900	12,000	166	35,700	10,500	246	2	24 (610)	9,400	15,971	70 (21)	85 (26)
4	LEH0473*Y4E^A	50,400	14,800	203	44,000	12,900	300	2	24 (610)	9,400	15,971	70 (21)	85 (26)
4	LEH0513*Y4E^A	57,000	16,700	174	49,800	14,600	258	3	24 (610)	13,200	22,427	70 (21)	85 (26)
4	LEH0653*Y4E^A	66,500	19,500	209	58,100	17,000	310	3	24 (610)	13,200	22,427	70 (21)	85 (26)
4	LEH0693*Y4E^A	73,200	21,500	375	63,900	18,700	1,111	4	24 (610)	17,600	29,903	70 (21)	85 (26)
4	LEH0883*Y4E^A	86,500	25,400	419	75,500	22,100	1,241	4	24 (610)	17,600	29,903	70 (21)	85 (26)
6	LEH1123*Y6E^A	106,400	31,200	369	93,000	27,300	1,092	3	30 (763)	20,700	35,170	100 (30)	115 (35)
6	LEH1343*Y6E^A	127,300	37,300	370	111,200	32,600	1,096	3	30 (763)	20,700	35,170	100 (30)	115 (35)
6	LEH1563*Y6E^A	148,200	43,400	439	129,500	38,000	1,300	3	30 (763)	24,300	41,286	100 (30)	115 (35)
6	LEH1823*Y6E^A	172,900	50,700	1,491	151,100	44,300	2,209	3	30 (763)	26,550	45,109	120 (37)	140 (43)
6	LEH2333*Y6E^A	221,400	64,900	1,982	193,400	56,700	1,469**	4	30 (763)	35,400	60,145	120 (37)	140 (43)
4	LEH0983*Y4E^A	93,100	27,300	369	81,300	23,800	1,092	3	30 (763)	21,600	36,699	100 (30)	115 (35)
4	LEH1163*Y4E^A	110,200	32,300	370	96,300	28,200	1,096	3	30 (763)	21,600	36,699	100 (30)	115 (35)
4	LEH1343*Y4E^A	127,300	37,300	436	111,200	32,600	1,292	3	30 (763)	25,200	42,815	100 (30)	115 (35)
4	LEH1583*Y4E^A	150,100	44,000	1,488	131,100	38,400	2,206	3	30 (763)	27,600	46,893	120 (37)	140 (43)
4	LEH2053*Y4E^A	194,800	57,100	1,909	170,200	49,900	1,414**	4	30 (763)	36,800	62,524	120 (37)	140 (43)

Notes:

¹= Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A2L PERFORMANCE DATA

Application Capacity: Low Temperature Electric Defrost - 60 Hz

FPI	Model	R-454A			Fan Data				Air Throw	
		Application Capacity ¹			No. of Fans	Dia. in (mm)	CFM	m ³ H	Standard	w/Collar
		10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.					ft (m)	ft (m)
6	LEH0423*Y6E^A	47,500	13,900	257	2	24 (610)	9,000	15,291	70 (21)	85 (26)
6	LEH0513*Y6E^A	59,200	17,300	313	2	24 (610)	9,000	15,291	70 (21)	85 (26)
6	LEH0573*Y6E^A	66,900	19,600	269	3	24 (610)	12,600	21,408	70 (21)	85 (26)
6	LEH0713*Y6E^A	78,600	23,000	323	3	24 (610)	12,600	21,408	70 (21)	85 (26)
6	LEH0763*Y6E^A	86,300	25,300	1,159	4	24 (610)	16,800	28,543	70 (21)	85 (26)
6	LEH0963*Y6E^A	101,900	29,900	1,295	4	24 (610)	16,800	28,543	70 (21)	85 (26)
4	LEH0373*Y4E^A	41,700	12,200	257	2	24 (610)	9,400	15,971	70 (21)	85 (26)
4	LEH0473*Y4E^A	51,400	15,100	313	2	24 (610)	9,400	15,971	70 (21)	85 (26)
4	LEH0513*Y4E^A	58,200	17,100	269	3	24 (610)	13,200	22,427	70 (21)	85 (26)
4	LEH0653*Y4E^A	67,900	19,900	323	3	24 (610)	13,200	22,427	70 (21)	85 (26)
4	LEH0693*Y4E^A	74,700	21,900	1,159	4	24 (610)	17,600	29,903	70 (21)	85 (26)
4	LEH0883*Y4E^A	88,300	25,900	1,295	4	24 (610)	17,600	29,903	70 (21)	85 (26)
6	LEH1123*Y6E^A	108,600	31,800	1,140	3	30 (763)	20,700	35,170	100 (30)	115 (35)
6	LEH1343*Y6E^A	130,000	38,100	1,143	3	30 (763)	20,700	35,170	100 (30)	115 (35)
6	LEH1563*Y6E^A	151,300	44,300	1,356	3	30 (763)	24,300	41,286	100 (30)	115 (35)
6	LEH1823*Y6E^A	176,500	51,700	2,305	3	30 (763)	26,550	45,109	120 (37)	140 (43)
6	LEH2333*Y6E^A	226,000	66,200	1,532**	4	30 (763)	35,400	60,145	120 (37)	140 (43)
4	LEH0983*Y4E^A	95,100	27,900	1,140	3	30 (763)	21,600	36,699	100 (30)	115 (35)
4	LEH1163*Y4E^A	112,500	33,000	1,143	3	30 (763)	21,600	36,699	100 (30)	115 (35)
4	LEH1343*Y4E^A	130,000	38,100	1,348	3	30 (763)	25,200	42,815	100 (30)	115 (35)
4	LEH1583*Y4E^A	153,300	44,900	2,301	3	30 (763)	27,600	46,893	120 (37)	140 (43)
4	LEH2053*Y4E^A	198,900	58,300	1,476**	4	30 (763)	36,800	62,524	120 (37)	140 (43)

Notes:

¹= Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A2L PERFORMANCE DATA

Application Capacity: Low Temperature Electric Defrost - 50 Hz

FPI	Model	R-455A			R-454C			Fan Data				Air Throw	
		Application Capacity ¹			Application Capacity ¹								
		10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.	10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.	No. of Fans	Dia. in (mm)	CFM	m³H	Standard	w/Collar
BTUH	Watts	Sq. Ft.	BTUH	Watts	Sq. Ft.	No. of Fans	Dia. in (mm)	CFM	m³H	ft (m)	ft (m)		
6	LEH0423*Y6E^A	42,800	12,500	166	37,400	11,000	246	2	24 (610)	8,100	13,762	70 (21)	85 (26)
6	LEH0513*Y6E^A	53,300	15,600	203	46,600	13,700	300	2	24 (610)	8,100	13,762	70 (21)	85 (26)
6	LEH0573*Y6E^A	60,300	17,700	174	52,700	15,400	258	3	24 (610)	11,300	19,199	70 (21)	85 (26)
6	LEH0713*Y6E^A	70,800	20,700	209	61,800	18,100	310	3	24 (610)	11,300	19,199	70 (21)	85 (26)
6	LEH0763*Y6E^A	77,800	22,800	375	68,000	19,900	1,111	4	24 (610)	15,100	25,655	70 (21)	85 (26)
6	LEH0963*Y6E^A	91,800	26,900	419	80,200	23,500	1,241	4	24 (610)	15,100	25,655	70 (21)	85 (26)
4	LEH0373*Y4E^A	37,600	11,000	166	32,900	9,600	246	2	24 (610)	8,500	14,442	70 (21)	85 (26)
4	LEH0473*Y4E^A	46,400	13,600	203	40,500	11,900	300	2	24 (610)	8,500	14,442	70 (21)	85 (26)
4	LEH0513*Y4E^A	52,400	15,400	174	45,800	13,400	258	3	24 (610)	11,900	20,218	70 (21)	85 (26)
4	LEH0653*Y4E^A	61,200	17,900	209	53,500	15,700	310	3	24 (610)	11,900	20,218	70 (21)	85 (26)
4	LEH0693*Y4E^A	67,300	19,700	375	58,800	17,200	1,111	4	24 (610)	15,900	27,014	70 (21)	85 (26)
4	LEH0883*Y4E^A	79,500	23,300	419	69,500	20,400	1,241	4	24 (610)	15,900	27,014	70 (21)	85 (26)
6	LEH1123*Y6E^A	97,900	28,700	369	85,500	25,100	1,092	3	30 (763)	18,600	31,602	90 (27)	100 (30)
6	LEH1343*Y6E^A	117,100	34,300	370	102,300	30,000	1,096	3	30 (763)	18,600	31,602	90 (27)	100 (30)
6	LEH1563*Y6E^A	136,300	39,900	439	119,100	34,900	1,300	3	30 (763)	21,900	37,208	90 (27)	100 (30)
6	LEH1823*Y6E^A	159,000	46,600	1,491	138,900	40,700	2,209	3	30 (763)	23,900	40,606	110 (34)	130 (40)
6	LEH2333*Y6E^A	203,700	59,700	1,982	178,000	52,200	1,469**	4	30 (763)	31,900	54,198	110 (34)	130 (40)
4	LEH0983*Y4E^A	85,700	25,100	369	74,900	22,000	1,092	3	30 (763)	19,500	33,131	90 (27)	100 (30)
4	LEH1163*Y4E^A	101,400	29,700	370	88,600	26,000	1,096	3	30 (763)	19,500	33,131	90 (27)	100 (30)
4	LEH1343*Y4E^A	117,100	34,300	436	102,300	30,000	1,292	3	30 (763)	22,700	38,568	90 (27)	100 (30)
4	LEH1583*Y4E^A	138,100	40,500	1,488	120,700	35,400	2,206	3	30 (763)	24,900	42,305	110 (34)	130 (40)
4	LEH2053*Y4E^A	179,200	52,500	1,909	156,500	45,900	1,414**	4	30 (763)	33,100	56,237	110 (34)	130 (40)

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the ARI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

** = Releasable charge is larger than Mmax. Ventilation is required.

^ = Motor Code Designator (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A2L PERFORMANCE DATA

Application Capacity: Low Temperature Electric Defrost - 50 Hz

FPI	Model	R-454A			Fan Data				Air Throw	
		Application Capacity ¹			No. of Fans	Dia. in (mm)	CFM	m ³ H	Standard	w/Collar
		10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.					ft (m)	ft (m)
6	LEH0423*Y6E^A	43,700	12,800	257	2	24 (610)	8,100	13,762	70 (21)	85 (26)
6	LEH0513*Y6E^A	54,400	15,900	313	2	24 (610)	8,100	13,762	70 (21)	85 (26)
6	LEH0573*Y6E^A	61,600	18,100	269	3	24 (610)	11,300	19,199	70 (21)	85 (26)
6	LEH0713*Y6E^A	72,300	21,200	323	3	24 (610)	11,300	19,199	70 (21)	85 (26)
6	LEH0763*Y6E^A	79,400	23,300	1,159	4	24 (610)	15,100	25,655	70 (21)	85 (26)
6	LEH0963*Y6E^A	93,700	27,500	1,295	4	24 (610)	15,100	25,655	70 (21)	85 (26)
4	LEH0373*Y4E^A	38,400	11,300	257	2	24 (610)	8,500	14,442	70 (21)	85 (26)
4	LEH0473*Y4E^A	47,300	13,900	313	2	24 (610)	8,500	14,442	70 (21)	85 (26)
4	LEH0513*Y4E^A	53,500	15,700	269	3	24 (610)	11,900	20,218	70 (21)	85 (26)
4	LEH0653*Y4E^A	62,500	18,300	323	3	24 (610)	11,900	20,218	70 (21)	85 (26)
4	LEH0693*Y4E^A	68,700	20,100	1,159	4	24 (610)	15,900	27,014	70 (21)	85 (26)
4	LEH0883*Y4E^A	81,200	23,800	1,295	4	24 (610)	15,900	27,014	70 (21)	85 (26)
6	LEH1123*Y6E^A	99,900	29,300	1,140	3	30 (763)	18,600	31,602	90 (27)	100 (30)
6	LEH1343*Y6E^A	119,600	35,100	1,143	3	30 (763)	18,600	31,602	90 (27)	100 (30)
6	LEH1563*Y6E^A	139,200	40,800	1,356	3	30 (763)	21,900	37,208	90 (27)	100 (30)
6	LEH1823*Y6E^A	162,400	47,600	2,305	3	30 (763)	23,900	40,606	110 (34)	130 (40)
6	LEH2333*Y6E^A	208,000	61,000	1,532**	4	30 (763)	31,900	54,198	110 (34)	130 (40)
4	LEH0983*Y4E^A	87,500	25,600	1,140	3	30 (763)	19,500	33,131	90 (27)	100 (30)
4	LEH1163*Y4E^A	103,500	30,300	1,143	3	30 (763)	19,500	33,131	90 (27)	100 (30)
4	LEH1343*Y4E^A	119,600	35,100	1,348	3	30 (763)	22,700	38,568	90 (27)	100 (30)
4	LEH1583*Y4E^A	141,000	41,300	2,301	3	30 (763)	24,900	42,305	110 (34)	130 (40)
4	LEH2053*Y4E^A	182,900	53,600	1,476**	4	30 (763)	33,100	56,237	110 (34)	130 (40)

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

** = Releasable charge is larger than Mmax. Ventilation is required.

^ = Motor Code Designator (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A2L PERFORMANCE DATA

Application Capacity: Electric Defrost High CFM - 60 Hz

FPI	Model	R-455A			R-454C			Fan Data				Air Throw	
		Application Capacity ¹			Application Capacity ¹								
		10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.	10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.	No. of Fans	Dia. in (mm)	CFM	m³H	Standard ft (m)	w/Collar ft (m)
6	LEH0423*Y6EHA	51,200	15,000	166	44,700	13,100	246	2	24 (610)	11,300	19,199	85 (26)	100 (30)
6	LEH0513*Y6EHA	63,700	18,700	203	55,700	16,300	300	2	24 (610)	11,300	19,199	85 (26)	100 (30)
6	LEH0573*Y6EHA	72,100	21,100	174	63,000	18,500	258	3	24 (610)	15,900	27,014	85 (26)	100 (30)
6	LEH0713*Y6EHA	84,600	24,800	209	74,000	21,700	310	3	24 (610)	15,900	27,014	85 (26)	100 (30)
6	LEH0763*Y6EHA	93,000	27,300	375	81,300	23,800	1,111	4	24 (610)	21,200	36,019	85 (26)	100 (30)
6	LEH0963*Y6EHA	109,700	32,100	419	95,900	28,100	1,241	4	24 (610)	21,200	36,019	85 (26)	100 (30)
4	LEH0373*Y4EHA	42,900	12,600	166	37,500	11,000	246	2	24 (610)	12,200	20,728	85 (26)	100 (30)
4	LEH0473*Y4EHA	52,900	15,500	203	46,200	13,500	300	2	24 (610)	12,200	20,728	85 (26)	100 (30)
4	LEH0513*Y4EHA	59,900	17,600	174	52,300	15,300	258	3	24 (610)	17,000	28,883	85 (26)	100 (30)
4	LEH0653*Y4EHA	69,800	20,500	209	61,000	17,900	310	3	24 (610)	17,000	28,883	85 (26)	100 (30)
4	LEH0693*Y4EHA	76,800	22,500	375	67,100	19,700	1,111	4	24 (610)	22,600	38,398	85 (26)	100 (30)
4	LEH0883*Y4EHA	90,800	26,600	419	79,300	23,200	1,241	4	24 (610)	22,600	38,398	85 (26)	100 (30)
6	LEH1123*Y6EHA	117,000	34,300	369	102,300	30,000	1,092	3	30 (763)	23,300	39,587	110 (34)	130 (40)
6	LEH1343*Y6EHA	140,000	41,000	370	122,300	35,800	1,096	3	30 (763)	23,300	39,587	110 (34)	130 (40)
6	LEH1563*Y6EHA	163,000	47,800	439	142,400	41,700	1,300	3	30 (763)	28,000	47,572	110 (34)	130 (40)
6	LEH1823*Y6EHA	190,200	55,700	1,491	166,200	48,700	2,209	3	30 (763)	29,700	50,461	130 (40)	150 (46)
6	LEH2333*Y6EHA	243,500	71,400	1,982	212,700	62,300	1,469**	4	30 (763)	39,600	67,281	130 (40)	150 (46)
4	LEH0983*Y4EHA	97,800	28,700	369	85,400	25,000	1,092	3	30 (763)	23,800	40,436	110 (34)	130 (40)
4	LEH1163*Y4EHA	115,700	33,900	370	101,100	29,600	1,096	3	30 (763)	23,800	40,436	110 (34)	130 (40)
4	LEH1343*Y4EHA	133,700	39,200	436	116,800	34,200	1,292	3	30 (763)	28,600	48,592	110 (34)	130 (40)
4	LEH1583*Y4EHA	157,600	46,200	1,488	137,700	40,400	2,206	3	30 (763)	30,600	51,990	130 (40)	150 (46)
4	LEH2053*Y4EHA	204,500	59,900	1,909	178,700	52,400	1,414**	4	30 (763)	40,800	69,320	130 (40)	150 (46)

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

** = Releasable charge is larger than Mmax. Ventilation is required.

Models Not Meeting DOE Minimum AWEF

A2L PERFORMANCE DATA

Application Capacity: Electric Defrost High CFM - 60 Hz

FPI	Model	R-454A			Fan Data				Air Throw	
		Application Capacity ¹			No. of Fans	Dia. in (mm)	CFM	m^3/H	Standard	w/Collar
		10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.					ft (m)	ft (m)
6	LEH0423*Y6EHA	52,300	15,300	257	2	24 (610)	11,300	19,199	85 (26)	100 (30)
6	LEH0513*Y6EHA	65,100	19,100	313	2	24 (610)	11,300	19,199	85 (26)	100 (30)
6	LEH0573*Y6EHA	73,600	21,600	269	3	24 (610)	15,900	27,014	85 (26)	100 (30)
6	LEH0713*Y6EHA	86,400	25,300	323	3	24 (610)	15,900	27,014	85 (26)	100 (30)
6	LEH0763*Y6EHA	95,000	27,800	1,159	4	24 (610)	21,200	36,019	85 (26)	100 (30)
6	LEH0963*Y6EHA	112,000	32,800	1,295	4	24 (610)	21,200	36,019	85 (26)	100 (30)
4	LEH0373*Y4EHA	43,800	12,800	257	2	24 (610)	12,200	20,728	85 (26)	100 (30)
4	LEH0473*Y4EHA	54,000	15,800	313	2	24 (610)	12,200	20,728	85 (26)	100 (30)
4	LEH0513*Y4EHA	61,100	17,900	269	3	24 (610)	17,000	28,883	85 (26)	100 (30)
4	LEH0653*Y4EHA	71,300	20,900	323	3	24 (610)	17,000	28,883	85 (26)	100 (30)
4	LEH0693*Y4EHA	78,400	23,000	1,159	4	24 (610)	22,600	38,398	85 (26)	100 (30)
4	LEH0883*Y4EHA	92,700	27,200	1,295	4	24 (610)	22,600	38,398	85 (26)	100 (30)
6	LEH1123*Y6EHA	119,500	35,000	1,140	3	30 (763)	23,300	39,587	110 (34)	130 (40)
6	LEH1343*Y6EHA	143,000	41,900	1,143	3	30 (763)	23,300	39,587	110 (34)	130 (40)
6	LEH1563*Y6EHA	166,500	48,800	1,356	3	30 (763)	28,000	47,572	110 (34)	130 (40)
6	LEH1823*Y6EHA	194,200	56,900	2,305	3	30 (763)	29,700	50,461	130 (40)	150 (46)
6	LEH2333*Y6EHA	248,600	72,900	1,532**	4	30 (763)	39,600	67,281	130 (40)	150 (46)
4	LEH0983*Y4EHA	99,800	29,200	1,140	3	30 (763)	23,800	40,436	110 (34)	130 (40)
4	LEH1163*Y4EHA	118,100	34,600	1,143	3	30 (763)	23,800	40,436	110 (34)	130 (40)
4	LEH1343*Y4EHA	136,500	40,000	1,348	3	30 (763)	28,600	48,592	110 (34)	130 (40)
4	LEH1583*Y4EHA	160,900	47,200	2,301	3	30 (763)	30,600	51,990	130 (40)	150 (46)
4	LEH2053*Y4EHA	208,800	61,200	1,476**	4	30 (763)	40,800	69,320	130 (40)	150 (46)

Notes:

¹= Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

** = Releasable charge is larger than Mmax. Ventilation is required.

Models Not Meeting DOE Minimum AWEF

A1 PERFORMANCE DATA

Application Capacity: Low Temperature Electric Defrost - 60 Hz

FPI	Model	Legacy Model	R-404A/R-507A		R-448A/R-449A		Fan Data				Air Throw			
			Application Capacity ¹		Application Capacity ¹									
			10°F TD -20°F SST		6°C TD -29°C SST		10°F TD -20°F SST		6°C TD -29°C SST					
			BTUH	Watts	BTUH	Watts	No. of Fans	Dia. in (mm)	CFM	m ³ H	Standard	w/Collar		
6	LEH0423*±6E^A	LHE6450	45,000	13,200	49,000	14,400	2	24 (610)	9,000	15,291	70 (21)	85 (26)		
6	LEH0513*±6E^A	LHE6550	54,350	15,900	61,000	17,900	2	24 (610)	9,000	15,291	70 (21)	85 (26)		
6	LEH0573*±6E^A	LHE6640	62,700	18,400	69,000	20,200	3	24 (610)	12,600	21,408	70 (21)	85 (26)		
6	LEH0713*±6E^A	LHE6740	74,000	21,700	81,000	23,700	3	24 (610)	12,600	21,408	70 (21)	85 (26)		
6	LEH0763*±6E^A	LHE6810	81,000	23,700	89,000	26,100	4	24 (610)	16,800	28,543	70 (21)	85 (26)		
6	LEH0963*±6E^A	LHE6950	95,000	27,800	105,000	30,800	4	24 (610)	16,800	28,543	70 (21)	85 (26)		
4	LEH0373*±4E^A	LHL4400	40,000	11,700	43,000	12,600	2	24 (610)	9,400	15,971	70 (21)	85 (26)		
4	LEH0473*±4E^A	LHL4480	48,000	14,100	53,000	15,500	2	24 (610)	9,400	15,971	70 (21)	85 (26)		
4	LEH0513*±4E^A	LHL4560	56,000	16,400	60,000	17,600	3	24 (610)	13,200	22,427	70 (21)	85 (26)		
4	LEH0653*±4E^A	LHL4650	65,000	19,000	70,000	20,500	3	24 (610)	13,200	22,427	70 (21)	85 (26)		
4	LEH0693*±4E^A	LHL4710	71,000	20,800	77,000	22,600	4	24 (610)	17,600	29,903	70 (21)	85 (26)		
4	LEH0883*±4E^A	LHL4840	84,000	24,600	91,000	26,700	4	24 (610)	17,600	29,903	70 (21)	85 (26)		
6	LEH1123*±6E^A	LHE61020	100,850	29,600	112,000	32,800	3	30 (763)	20,700	35,170	100 (30)	115 (35)		
6	LEH1343*±6E^A	LHE61200	120,000	35,200	134,000	39,300	3	30 (763)	20,700	35,170	100 (30)	115 (35)		
6	LEH1563*±6E^A	LHE61390	139,000	40,700	156,000	45,700	3	30 (763)	24,300	41,286	100 (30)	115 (35)		
6	LEH1823*±6E^A	LHE61650	152,000	44,500	182,000	53,300	3	30 (763)	26,550	45,109	120 (37)	140 (43)		
6	LEH2333*±6E^A	LHE62120	203,550	59,700	233,000	68,300	4	30 (763)	35,400	60,145	120 (37)	140 (43)		
4	LEH0983*±4E^A	LHL4890	89,000	26,100	98,000	28,700	3	30 (763)	21,600	36,699	100 (30)	115 (35)		
4	LEH1163*±4E^A	LHL41050	105,000	30,800	116,000	34,000	3	30 (763)	21,600	36,699	100 (30)	115 (35)		
4	LEH1343*±4E^A	LHL41220	122,000	35,800	134,000	39,300	3	30 (763)	25,200	42,815	100 (30)	115 (35)		
4	LEH1583*±4E^A	LHL41440	141,150	41,400	158,000	46,300	3	30 (763)	27,600	46,893	120 (37)	140 (43)		
4	LEH2053*±4E^A	LHL41860	186,000	54,500	205,000	60,100	4	30 (763)	36,800	62,524	120 (37)	140 (43)		

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A1 PERFORMANCE DATA

Application Capacity: Low Temperature Electric Defrost - 60 Hz

FPI	Model	Legacy Model	R-407A/R-407F		R-407C		Fan Data				Air Throw	
			Application Capacity ¹		Application Capacity ¹							
			10°F TD -20°F SST	6°C TD -29°C SST	10°F TD -20°F SST	6°C TD -29°C SST	No. of Fans	Dia. in (mm)	CFM	m ³ H	Standard	w/Collar
BTUH	Watts	BTUH	Watts	No. of Fans	Dia. in (mm)	CFM	m ³ H	Standard	w/Collar	ft (m)	ft (m)	
6	LEH0423*±6E^A	LHE6450	49,000	14,400	49,000	14,400	2	24 (610)	9,000	15,291	70 (21)	85 (26)
6	LEH0513*±6E^A	LHE6550	61,000	17,900	61,000	17,900	2	24 (610)	9,000	15,291	70 (21)	85 (26)
6	LEH0573*±6E^A	LHE6640	69,000	20,200	69,000	20,200	3	24 (610)	12,600	21,408	70 (21)	85 (26)
6	LEH0713*±6E^A	LHE6740	81,000	23,700	81,000	23,700	3	24 (610)	12,600	21,408	70 (21)	85 (26)
6	LEH0763*±6E^A	LHE6810	89,000	26,100	89,000	26,100	4	24 (610)	16,800	28,543	70 (21)	85 (26)
6	LEH0963*±6E^A	LHE6950	105,000	30,800	105,000	30,800	4	24 (610)	16,800	28,543	70 (21)	85 (26)
4	LEH0373*±4E^A	LHL4400	43,000	12,600	43,000	12,600	2	24 (610)	9,400	15,971	70 (21)	85 (26)
4	LEH0473*±4E^A	LHL4480	53,000	15,500	53,000	15,500	2	24 (610)	9,400	15,971	70 (21)	85 (26)
4	LEH0513*±4E^A	LHL4560	60,000	17,600	60,000	17,600	3	24 (610)	13,200	22,427	70 (21)	85 (26)
4	LEH0653*±4E^A	LHL4650	70,000	20,500	70,000	20,500	3	24 (610)	13,200	22,427	70 (21)	85 (26)
4	LEH0693*±4E^A	LHL4710	77,000	22,600	77,000	22,600	4	24 (610)	17,600	29,903	70 (21)	85 (26)
4	LEH0883*±4E^A	LHL4840	91,000	26,700	91,000	26,700	4	24 (610)	17,600	29,903	70 (21)	85 (26)
6	LEH1123*±6E^A	LHE61020	112,000	32,800	112,000	32,800	3	30 (763)	20,700	35,170	100 (30)	115 (35)
6	LEH1343*±6E^A	LHE61200	134,000	39,300	134,000	39,300	3	30 (763)	20,700	35,170	100 (30)	115 (35)
6	LEH1563*±6E^A	LHE61390	156,000	45,700	156,000	45,700	3	30 (763)	24,300	41,286	100 (30)	115 (35)
6	LEH1823*±6E^A	LHE61650	182,000	53,300	182,000	53,300	3	30 (763)	26,550	45,109	120 (37)	140 (43)
6	LEH2333*±6E^A	LHE62120	233,000	68,300	233,000	68,300	4	30 (763)	35,400	60,145	120 (37)	140 (43)
4	LEH0983*±4E^A	LHL4890	98,000	28,700	98,000	28,700	3	30 (763)	21,600	36,699	100 (30)	115 (35)
4	LEH1163*±4E^A	LHL41050	116,000	34,000	116,000	34,000	3	30 (763)	21,600	36,699	100 (30)	115 (35)
4	LEH1343*±4E^A	LHL41220	134,000	39,300	134,000	39,300	3	30 (763)	25,200	42,815	100 (30)	115 (35)
4	LEH1583*±4E^A	LHL41440	158,000	46,300	158,000	46,300	3	30 (763)	27,600	46,893	120 (37)	140 (43)
4	LEH2053*±4E^A	LHL41860	205,000	60,100	205,000	60,100	4	30 (763)	36,800	62,524	120 (37)	140 (43)

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A1 PERFORMANCE DATA

Application Capacity: Electric Defrost - 50 Hz

FPI	Model	Legacy Model	R-404A/R-507A		R-448A/R-449A		Fan Data				Air Throw			
			Application Capacity ¹		Application Capacity ¹									
			10°F TD -20°F SST	6°C TD -29°C SST	10°F TD -20°F SST	6°C TD -29°C SST	No. of Fans	Dia. in (mm)	CFM	m ³ H				
			BTUH	Watts	BTUH	Watts				Standard ft (m)	w/Collar ft (m)			
6	LEH0423*±6E^A	LHE6450	41,400	12,100	45,100	13,200	2	24 (610)	8,100	13,762	70 (21)	85 (26)		
6	LEH0513*±6E^A	LHE6550	50,000	14,700	56,100	16,400	2	24 (610)	8,100	13,762	70 (21)	85 (26)		
6	LEH0573*±6E^A	LHE6640	57,700	16,900	63,500	18,600	3	24 (610)	11,300	19,199	70 (21)	85 (26)		
6	LEH0713*±6E^A	LHE6740	68,100	20,000	74,500	21,800	3	24 (610)	11,300	19,199	70 (21)	85 (26)		
6	LEH0763*±6E^A	LHE6810	74,500	21,800	81,900	24,000	4	24 (610)	15,100	25,655	70 (21)	85 (26)		
6	LEH0963*±6E^A	LHE6950	87,400	25,600	96,600	28,300	4	24 (610)	15,100	25,655	70 (21)	85 (26)		
4	LEH0373*±4E^A	LHL4400	36,800	10,800	39,600	11,600	2	24 (610)	8,500	14,442	70 (21)	85 (26)		
4	LEH0473*±4E^A	LHL4480	44,200	13,000	48,800	14,300	2	24 (610)	8,500	14,442	70 (21)	85 (26)		
4	LEH0513*±4E^A	LHL4560	51,500	15,100	55,200	16,200	3	24 (610)	11,900	20,218	70 (21)	85 (26)		
4	LEH0653*±4E^A	LHL4650	59,800	17,500	64,400	18,900	3	24 (610)	11,900	20,218	70 (21)	85 (26)		
4	LEH0693*±4E^A	LHL4710	65,300	19,100	70,800	20,700	4	24 (610)	15,900	27,014	70 (21)	85 (26)		
4	LEH0883*±4E^A	LHL4840	77,300	22,700	83,700	24,500	4	24 (610)	15,900	27,014	70 (21)	85 (26)		
6	LEH1123*±6E^A	LHE61020	92,800	27,200	103,000	30,200	3	30 (763)	18,600	31,602	90 (27)	100 (30)		
6	LEH1343*±6E^A	LHE61200	110,400	32,400	123,300	36,100	3	30 (763)	18,600	31,602	90 (27)	100 (30)		
6	LEH1563*±6E^A	LHE61390	127,900	37,500	143,500	42,100	3	30 (763)	21,900	37,208	90 (27)	100 (30)		
6	LEH1823*±6E^A	LHE61650	139,800	41,000	167,400	49,100	3	30 (763)	23,900	40,606	110 (34)	130 (40)		
6	LEH2333*±6E^A	LHE62120	187,300	54,900	214,400	62,800	4	30 (763)	31,900	54,198	110 (34)	130 (40)		
4	LEH0983*±4E^A	LHL4890	81,900	24,000	90,200	26,400	3	30 (763)	19,500	33,131	90 (27)	100 (30)		
4	LEH1163*±4E^A	LHL41050	96,600	28,300	106,700	31,300	3	30 (763)	19,500	33,131	90 (27)	100 (30)		
4	LEH1343*±4E^A	LHL41220	112,200	32,900	123,300	36,100	3	30 (763)	22,700	38,568	90 (27)	100 (30)		
4	LEH1583*±4E^A	LHL41440	129,900	38,100	145,400	42,600	3	30 (763)	24,900	42,305	110 (34)	130 (40)		
4	LEH2053*±4E^A	LHL41860	171,100	50,100	188,600	55,300	4	30 (763)	33,100	56,237	110 (34)	130 (40)		

Notes:

¹ Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A1 PERFORMANCE DATA

Application Capacity: Electric Defrost - 50 Hz

FPI	Model	Legacy Model	R-407A/R-407F		R-407C		Fan Data				Air Throw			
			Application Capacity ¹		Application Capacity ¹									
			10°F TD -20°F SST	6°C TD -29°C SST	10°F TD -20°F SST	6°C TD -29°C SST	BTUH	Watts	BTUH	Watts	No. of Fans	Dia. in (mm)	CFM	m ³ H
6	LEH0423*±6E^A	LHE6450	45,100	13,200	45,100	13,200	2	24 (610)	8,100	13,762	70 (21)	85 (26)		
6	LEH0513*±6E^A	LHE6550	56,100	16,400	56,100	16,400	2	24 (610)	8,100	13,762	70 (21)	85 (26)		
6	LEH0573*±6E^A	LHE6640	63,500	18,600	63,500	18,600	3	24 (610)	11,300	19,199	70 (21)	85 (26)		
6	LEH0713*±6E^A	LHE6740	74,500	21,800	74,500	21,800	3	24 (610)	11,300	19,199	70 (21)	85 (26)		
6	LEH0763*±6E^A	LHE6810	81,900	24,000	81,900	24,000	4	24 (610)	15,100	25,655	70 (21)	85 (26)		
6	LEH0963*±6E^A	LHE6950	96,600	28,300	96,600	28,300	4	24 (610)	15,100	25,655	70 (21)	85 (26)		
4	LEH0373*±4E^A	LHL4400	39,600	11,600	39,600	11,600	2	24 (610)	8,500	14,442	70 (21)	85 (26)		
4	LEH0473*±4E^A	LHL4480	48,800	14,300	48,800	14,300	2	24 (610)	8,500	14,442	70 (21)	85 (26)		
4	LEH0513*±4E^A	LHL4560	55,200	16,200	55,200	16,200	3	24 (610)	11,900	20,218	70 (21)	85 (26)		
4	LEH0653*±4E^A	LHL4650	64,400	18,900	64,400	18,900	3	24 (610)	11,900	20,218	70 (21)	85 (26)		
4	LEH0693*±4E^A	LHL4710	70,800	20,700	70,800	20,700	4	24 (610)	15,900	27,014	70 (21)	85 (26)		
4	LEH0883*±4E^A	LHL4840	83,700	24,500	83,700	24,500	4	24 (610)	15,900	27,014	70 (21)	85 (26)		
6	LEH1123*±6E^A	LHE61020	103,000	30,200	103,000	30,200	3	30 (763)	18,600	31,602	90 (27)	100 (30)		
6	LEH1343*±6E^A	LHE61200	123,300	36,100	123,300	36,100	3	30 (763)	18,600	31,602	90 (27)	100 (30)		
6	LEH1563*±6E^A	LHE61390	143,500	42,100	143,500	42,100	3	30 (763)	21,900	37,208	90 (27)	100 (30)		
6	LEH1823*±6E^A	LHE61650	167,400	49,100	167,400	49,100	3	30 (763)	23,900	40,606	110 (34)	130 (40)		
6	LEH2333*±6E^A	LHE62120	214,400	62,800	214,400	62,800	4	30 (763)	31,900	54,198	110 (34)	130 (40)		
4	LEH0983*±4E^A	LHL4890	90,200	26,400	90,200	26,400	3	30 (763)	19,500	33,131	90 (27)	100 (30)		
4	LEH1163*±4E^A	LHL41050	106,700	31,300	106,700	31,300	3	30 (763)	19,500	33,131	90 (27)	100 (30)		
4	LEH1343*±4E^A	LHL41220	123,300	36,100	123,300	36,100	3	30 (763)	22,700	38,568	90 (27)	100 (30)		
4	LEH1583*±4E^A	LHL41440	145,400	42,600	145,400	42,600	3	30 (763)	24,900	42,305	110 (34)	130 (40)		
4	LEH2053*±4E^A	LHL41860	188,600	55,300	188,600	55,300	4	30 (763)	33,100	56,237	110 (34)	130 (40)		

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A1 PERFORMANCE DATA

Application Capacity: Electric Defrost High CFM - 60 Hz

FPI	Model	Legacy Model	R-404A/R-507A		R-448A/R-449A		Fan Data				Air Throw	
			Application Capacity ¹		Application Capacity ¹							
			10°F TD -20°F SST	6°C TD -29°C SST	10°F TD -20°F SST	6°C TD -29°C SST	No. of Fans	Dia. in (mm)	CFM	m ³ H	Standard ft (m)	w/Collar ft (m)
6	LEH0423*±6EHA	LHE6450*V	49,500	14,500	53,900	15,800	2	24 (610)	11,300	19,199	85 (26)	100 (30)
6	LEH0513*±6EHA	LHE6550*V	59,800	17,500	67,100	19,700	2	24 (610)	11,300	19,199	85 (26)	100 (30)
6	LEH0573*±6EHA	LHE6640*V	69,000	20,200	75,900	22,200	3	24 (610)	15,900	27,014	85 (26)	100 (30)
6	LEH0713*±6EHA	LHE6740*V	81,400	23,900	89,100	26,100	3	24 (610)	15,900	27,014	85 (26)	100 (30)
6	LEH0763*±6EHA	LHE6810*V	89,100	26,100	97,900	28,700	4	24 (610)	21,200	36,019	85 (26)	100 (30)
6	LEH0963*±6EHA	LHE6950*V	104,500	30,600	115,500	33,800	4	24 (610)	21,200	36,019	85 (26)	100 (30)
4	LEH0373*±4EHA	LHL4400*V	42,000	12,300	45,150	13,200	2	24 (610)	12,200	20,728	85 (26)	100 (30)
4	LEH0473*±4EHA	LHL4480*V	50,400	14,800	55,650	16,300	2	24 (610)	12,200	20,728	85 (26)	100 (30)
4	LEH0513*±4EHA	LHL4560*V	58,800	17,200	63,000	18,500	3	24 (610)	17,000	28,883	85 (26)	100 (30)
4	LEH0653*±4EHA	LHL4650*V	68,250	20,000	73,500	21,500	3	24 (610)	17,000	28,883	85 (26)	100 (30)
4	LEH0693*±4EHA	LHL4710*V	74,550	21,800	80,850	23,700	4	24 (610)	22,600	38,398	85 (26)	100 (30)
4	LEH0883*±4EHA	LHL4840*V	88,200	25,800	95,550	28,000	4	24 (610)	22,600	38,398	85 (26)	100 (30)
6	LEH1123*±6EHA	LHE61020*V	110,900	32,500	123,200	36,100	3	30 (763)	23,300	39,587	110 (34)	130 (40)
6	LEH1343*±6EHA	LHE61200*V	132,000	38,700	147,400	43,200	3	30 (763)	23,300	39,587	110 (34)	130 (40)
6	LEH1563*±6EHA	LHE61390*V	152,900	44,800	171,600	50,300	3	30 (763)	28,000	47,572	110 (34)	130 (40)
6	LEH1823*±6EHA	LHE61650*V	167,200	49,000	200,200	58,700	3	30 (763)	29,700	50,461	130 (40)	150 (46)
6	LEH2333*±6EHA	LHE62120*V	223,900	65,600	256,300	75,100	4	30 (763)	39,600	67,281	130 (40)	150 (46)
4	LEH0983*±4EHA	LHL4890*V	93,450	27,400	102,900	30,200	3	30 (763)	23,800	40,436	110 (34)	130 (40)
4	LEH1163*±4EHA	LHL41050*V	110,250	32,300	121,800	35,700	3	30 (763)	23,800	40,436	110 (34)	130 (40)
4	LEH1343*±4EHA	LHL41220*V	128,100	37,500	140,700	41,200	3	30 (763)	28,600	48,592	110 (34)	130 (40)
4	LEH1583*±4EHA	LHL41440*V	148,200	43,400	165,900	48,600	3	30 (763)	30,600	51,990	130 (40)	150 (46)
4	LEH2053*±4EHA	LHL41860*V	195,300	57,200	215,250	63,100	4	30 (763)	40,800	69,320	130 (40)	150 (46)

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A1 PERFORMANCE DATA

Application Capacity: Electric Defrost High CFM - 60 Hz

FPI	Model	Legacy Model	R-407A/R-407F		R-407C		Fan Data				Air Throw	
			Application Capacity ¹		Application Capacity ¹							
			10°F TD -20°F SST	6°C TD -29°C SST	10°F TD -20°F SST	6°C TD -29°C SST	No. of Fans	Dia. in (mm)	CFM	m ³ H	Standard	w/Collar
BTUH	Watts	BTUH	Watts	No. of Fans	Dia. in (mm)	CFM	m ³ H	ft (m)	ft (m)			
6	LEH0423*±6EHA	LHE6450*V	53,900	15,800	53,900	15,800	2	24 (610)	11,300	19,199	85 (26)	100 (30)
6	LEH0513*±6EHA	LHE6550*V	67,100	19,700	67,100	19,700	2	24 (610)	11,300	19,199	85 (26)	100 (30)
6	LEH0573*±6EHA	LHE6640*V	75,900	22,200	75,900	22,200	3	24 (610)	15,900	27,014	85 (26)	100 (30)
6	LEH0713*±6EHA	LHE6740*V	89,100	26,100	89,100	26,100	3	24 (610)	15,900	27,014	85 (26)	100 (30)
6	LEH0763*±6EHA	LHE6810*V	97,900	28,700	97,900	28,700	4	24 (610)	21,200	36,019	85 (26)	100 (30)
6	LEH0963*±6EHA	LHE6950*V	115,500	33,800	115,500	33,800	4	24 (610)	21,200	36,019	85 (26)	100 (30)
4	LEH0373*±4EHA	LHL4400*V	45,150	13,200	45,150	13,200	2	24 (610)	12,200	20,728	85 (26)	100 (30)
4	LEH0473*±4EHA	LHL4480*V	55,650	16,300	55,650	16,300	2	24 (610)	12,200	20,728	85 (26)	100 (30)
4	LEH0513*±4EHA	LHL4560*V	63,000	18,500	63,000	18,500	3	24 (610)	17,000	28,883	85 (26)	100 (30)
4	LEH0653*±4EHA	LHL4650*V	73,500	21,500	73,500	21,500	3	24 (610)	17,000	28,883	85 (26)	100 (30)
4	LEH0693*±4EHA	LHL4710*V	80,850	23,700	80,850	23,700	4	24 (610)	22,600	38,398	85 (26)	100 (30)
4	LEH0883*±4EHA	LHL4840*V	95,550	28,000	95,550	28,000	4	24 (610)	22,600	38,398	85 (26)	100 (30)
6	LEH1123*±6EHA	LHE61020*V	123,200	36,100	123,200	36,100	3	30 (763)	23,300	39,587	110 (34)	130 (40)
6	LEH1343*±6EHA	LHE61200*V	147,400	43,200	147,400	43,200	3	30 (763)	23,300	39,587	110 (34)	130 (40)
6	LEH1563*±6EHA	LHE61390*V	171,600	50,300	171,600	50,300	3	30 (763)	28,000	47,572	110 (34)	130 (40)
6	LEH1823*±6EHA	LHE61650*V	200,200	58,700	200,200	58,700	3	30 (763)	29,700	50,461	130 (40)	150 (46)
6	LEH2333*±6EHA	LHE62120*V	256,300	75,100	256,300	75,100	4	30 (763)	39,600	67,281	130 (40)	150 (46)
4	LEH0983*±4EHA	LHL4890*V	102,900	30,200	102,900	30,200	3	30 (763)	23,800	40,436	110 (34)	130 (40)
4	LEH1163*±4EHA	LHL41050*V	121,800	35,700	121,800	35,700	3	30 (763)	23,800	40,436	110 (34)	130 (40)
4	LEH1343*±4EHA	LHL41220*V	140,700	41,200	140,700	41,200	3	30 (763)	28,600	48,592	110 (34)	130 (40)
4	LEH1583*±4EHA	LHL41440*V	165,900	48,600	165,900	48,600	3	30 (763)	30,600	51,990	130 (40)	150 (46)
4	LEH2053*±4EHA	LHL41860*V	215,250	63,100	215,250	63,100	4	30 (763)	40,800	69,320	130 (40)	150 (46)

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

SPECIFICATIONS

Electric Defrost - 60 Hz

FPI	Model	Fan Diameter	HP	2-Speed EC Motor								Defrost Heaters		
				208-230/3/60				460/3/60				Watts	Total Amps	
		in (mm)		Amps	Watts	MCA	MOPD	Amps	Watts	MCA	MOPD		208-230/3/60	460/3/60
6	LEH0423*±6E^A	24 (610)	3/4	4.4	1119.0	5.0	15.0	2.2	1119.0	2.5	15.0	9,900	27.5	13.9
6	LEH0513*±6E^A	24 (610)	3/4	4.4	1119.0	5.0	15.0	2.2	1119.0	2.5	15.0	9,900	27.5	13.9
6	LEH0573*±6E^A	24 (610)	3/4	6.6	1678.5	7.2	15.0	3.3	1678.5	3.6	15.0	12,900	35.8	18.1
6	LEH0713*±6E^A	24 (610)	3/4	6.6	1678.5	7.2	15.0	3.3	1678.5	3.6	15.0	12,900	35.8	18.1
6	LEH0763*±6E^A	24 (610)	3/4	8.8	2238.0	9.4	15.0	4.4	2238.0	4.7	15.0	17,050	47.8	24.3
6	LEH0963*±6E^A	24 (610)	3/4	8.8	2238.0	9.4	15.0	4.4	2238.0	4.7	15.0	17,050	47.8	24.3
4	LEH0373*±4E^A	24 (610)	3/4	4.4	1119.0	5.0	15.0	2.2	1119.0	2.5	15.0	9,900	27.5	13.9
4	LEH0473*±4E^A	24 (610)	3/4	4.4	1119.0	5.0	15.0	2.2	1119.0	2.5	15.0	9,900	27.5	13.9
4	LEH0513*±4E^A	24 (610)	3/4	6.6	1678.5	7.2	15.0	3.3	1678.5	3.6	15.0	12,900	35.8	18.1
4	LEH0653*±4E^A	24 (610)	3/4	6.6	1678.5	7.2	15.0	3.3	1678.5	3.6	15.0	12,900	35.8	18.1
4	LEH0693*±4E^A	24 (610)	3/4	8.8	2238.0	9.4	15.0	4.4	2238.0	4.7	15.0	17,050	47.8	24.3
4	LEH0883*±4E^A	24 (610)	3/4	8.8	2238.0	9.4	15.0	4.4	2238.0	4.7	15.0	17,050	47.8	24.3
6	LEH1123*±6E^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	21,400	64.2	32.1
6	LEH1343*±6E^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	21,400	64.2	32.1
6	LEH1563*±6E^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	21,400	64.2	32.1
6	LEH1823*±6E^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	33,600	87.2	47.5
6	LEH2333*±6E^A	30 (763)	1-1/2	14.8	4474.0	15.7	25.0	7.6	4474.0	8.1	15.0	49,850	128.4	70.0
4	LEH0983*±4E^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	21,400	64.2	32.1
4	LEH1163*±4E^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	21,400	64.2	32.1
4	LEH1343*±4E^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	21,400	64.2	32.1
4	LEH1583*±4E^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	33,600	87.2	47.5
4	LEH2053*±4E^A	30 (763)	1-1/2	14.8	4474.0	15.7	25.0	7.6	4474.0	8.1	15.0	49,850	128.4	70.0

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

SPECIFICATIONS

Electric Defrost - 60 Hz

FPI	Model	Fan Diameter in (mm)	HP	Variable Speed EC Motor								Defrost Heaters		
				208-230/3/60				460/3/60				Watts	Total Amps	
				Amps	Watts	MCA	MOPD	Amps	Watts	MCA	MOPD		208-230/3/60	460/3/60
6	LEH0423*±6E^A	24 (610)	3/4	4.4	1119.0	5.0	15.0	2.2	1119.0	2.5	15.0	9,900	27.5	13.9
6	LEH0513*±6E^A	24 (610)	3/4	4.4	1119.0	5.0	15.0	2.2	1119.0	2.5	15.0	9,900	27.5	13.9
6	LEH0573*±6E^A	24 (610)	3/4	6.6	1678.5	7.2	15.0	3.3	1678.5	3.6	15.0	12,900	35.8	18.1
6	LEH0713*±6E^A	24 (610)	3/4	6.6	1678.5	7.2	15.0	3.3	1678.5	3.6	15.0	12,900	35.8	18.1
6	LEH0763*±6E^A	24 (610)	3/4	8.8	2238.0	9.4	15.0	4.4	2238.0	4.7	15.0	17,050	47.8	24.3
6	LEH0963*±6E^A	24 (610)	3/4	8.8	2238.0	9.4	15.0	4.4	2238.0	4.7	15.0	17,050	47.8	24.3
4	LEH0373*±4E^A	24 (610)	3/4	4.4	1119.0	5.0	15.0	2.2	1119.0	2.5	15.0	9,900	27.5	13.9
4	LEH0473*±4E^A	24 (610)	3/4	4.4	1119.0	5.0	15.0	2.2	1119.0	2.5	15.0	9,900	27.5	13.9
4	LEH0513*±4E^A	24 (610)	3/4	6.6	1678.5	7.2	15.0	3.3	1678.5	3.6	15.0	12,900	35.8	18.1
4	LEH0653*±4E^A	24 (610)	3/4	6.6	1678.5	7.2	15.0	3.3	1678.5	3.6	15.0	12,900	35.8	18.1
4	LEH0693*±4E^A	24 (610)	3/4	8.8	2238.0	9.4	15.0	4.4	2238.0	4.7	15.0	17,050	47.8	24.3
4	LEH0883*±4E^A	24 (610)	3/4	8.8	2238.0	9.4	15.0	4.4	2238.0	4.7	15.0	17,050	47.8	24.3
6	LEH1123*±6E^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	21,400	64.2	32.1
6	LEH1343*±6E^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	21,400	64.2	32.1
6	LEH1563*±6E^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	21,400	64.2	32.1
6	LEH1823*±6E^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	33,600	87.2	47.5
6	LEH2333*±6E^A	30 (763)	1-1/2	14.8	4474.0	15.7	25.0	7.6	4474.0	8.1	15.0	49,850	128.4	70.0
4	LEH0983*±4E^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	21,400	64.2	32.1
4	LEH1163*±4E^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	21,400	64.2	32.1
4	LEH1343*±4E^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	21,400	64.2	32.1
4	LEH1583*±4E^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	33,600	87.2	47.5
4	LEH2053*±4E^A	30 (763)	1-1/2	14.8	4474.0	15.7	25.0	7.6	4474.0	8.1	15.0	49,850	128.4	70.0

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

SPECIFICATIONS

Electric Defrost - 60 Hz

FPI	Model	Fan Diameter	HP	3 Phase AC Open Drip Proof Rail Mount								Defrost Heaters		
				208-230/3/60				460/3/60				Watts	Total Amps	
		in (mm)		Amps	Watts	MCA	MOPD	Amps	Watts	MCA	MOPD		208-230/3/60	460/3/60
6	LEH0423*±6E^A	24 (610)	3/4	8.0	1119.0	9.0	20.0	4.0	1119.0	4.5	15.0	9,900	27.5	13.9
6	LEH0513*±6E^A	24 (610)	3/4	8.0	1119.0	9.0	20.0	4.0	1119.0	4.5	15.0	9,900	27.5	13.9
6	LEH0573*±6E^A	24 (610)	3/4	12.0	1678.5	13.0	25.0	6.0	1678.5	6.5	15.0	12,900	35.8	18.1
6	LEH0713*±6E^A	24 (610)	3/4	12.0	1678.5	13.0	25.0	6.0	1678.5	6.5	15.0	12,900	35.8	18.1
6	LEH0763*±6E^A	24 (610)	3/4	16.0	2238.0	17.0	30.0	8.0	2238.0	8.5	15.0	17,050	47.8	24.3
6	LEH0963*±6E^A	24 (610)	3/4	16.0	2238.0	17.0	30.0	8.0	2238.0	8.5	15.0	17,050	47.8	24.3
4	LEH0373*±4E^A	24 (610)	3/4	8.0	1119.0	9.0	20.0	4.0	1119.0	4.5	15.0	9,900	27.5	13.9
4	LEH0473*±4E^A	24 (610)	3/4	8.0	1119.0	9.0	20.0	4.0	1119.0	4.5	15.0	9,900	27.5	13.9
4	LEH0513*±4E^A	24 (610)	3/4	12.0	1678.5	13.0	25.0	6.0	1678.5	6.5	15.0	12,900	35.8	18.1
4	LEH0653*±4E^A	24 (610)	3/4	12.0	1678.5	13.0	25.0	6.0	1678.5	6.5	15.0	12,900	35.8	18.1
4	LEH0693*±4E^A	24 (610)	3/4	16.0	2238.0	17.0	30.0	8.0	2238.0	8.5	15.0	17,050	47.8	24.3
4	LEH0883*±4E^A	24 (610)	3/4	16.0	2238.0	17.0	30.0	8.0	2238.0	8.5	15.0	17,050	47.8	24.3
6	LEH1123*±6E^A	30 (763)	1	13.8	2237.0	15.0	25.0	6.9	2237.0	7.5	15.0	21,400	64.2	32.1
6	LEH1343*±6E^A	30 (763)	1	13.8	2237.0	15.0	25.0	6.9	2237.0	7.5	15.0	21,400	64.2	32.1
6	LEH1563*±6E^A	30 (763)	1-1/2	19.8	3356.0	21.5	40.0	9.9	3356.0	10.7	20.0	21,400	64.2	32.1
6	LEH1823*±6E^A	30 (763)	1-1/2	21.0	3356.0	22.8	40.0	10.5	3356.0	11.4	20.0	33,600	87.2	47.5
6	LEH2333*±6E^A	30 (763)	1-1/2	28.0	4474.0	29.8	45.0	14.0	4474.0	14.9	25.0	49,850	128.4	70.0
4	LEH0983*±4E^A	30 (763)	1	13.8	2237.0	15.0	25.0	6.9	2237.0	7.5	15.0	21,400	64.2	32.1
4	LEH1163*±4E^A	30 (763)	1	13.8	2237.0	15.0	25.0	6.9	2237.0	7.5	15.0	21,400	64.2	32.1
4	LEH1343*±4E^A	30 (763)	1-1/2	19.8	3356.0	21.5	40.0	9.9	3356.0	10.7	20.0	21,400	64.2	32.1
4	LEH1583*±4E^A	30 (763)	1-1/2	21.0	3356.0	22.8	40.0	10.5	3356.0	11.4	20.0	33,600	87.2	47.5
4	LEH2053*±4E^A	30 (763)	1-1/2	28.0	4474.0	29.8	45.0	14.0	4474.0	14.9	25.0	49,850	128.4	70.0

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

SPECIFICATIONS

Electric Defrost - 60 Hz

FPI	Model	Fan Diameter	HP	3 Phase AC Totally Enclosed Rail Mount								Defrost Heaters		
				208-230/3/60				460/3/60				Watts	Total Amps	
		in (mm)		Amps	Watts	MCA	MOPD	Amps	Watts	MCA	MOPD		208-230/3/60	460/3/60
6	LEH0423*±6E^A	24 (610)	1	6.0	1,492	6.8	20.0	3.0	1,492	3.4	15.0	9,900	27.5	13.9
6	LEH0513*±6E^A	24 (610)	1	6.0	1,492	6.8	20.0	3.0	1,492	3.4	15.0	9,900	27.5	13.9
6	LEH0573*±6E^A	24 (610)	1	9.0	2,238	9.8	20.0	4.5	2,238	4.9	15.0	12,900	35.8	18.1
6	LEH0713*±6E^A	24 (610)	1	9.0	2,238	9.8	20.0	4.5	2,238	4.9	15.0	12,900	35.8	18.1
6	LEH0763*±6E^A	24 (610)	1	12.0	2,984	12.8	20.0	6.0	2,984	6.4	15.0	17,050	47.8	24.3
6	LEH0963*±6E^A	24 (610)	1	12.0	2,984	12.8	20.0	6.0	2,984	6.4	15.0	17,050	47.8	24.3
4	LEH0373*±4E^A	24 (610)	1	6.0	1,492	6.8	20.0	3.0	1,492	3.4	15.0	9,900	27.5	13.9
4	LEH0473*±4E^A	24 (610)	1	6.0	1,492	6.8	20.0	3.0	1,492	3.4	15.0	9,900	27.5	13.9
4	LEH0513*±4E^A	24 (610)	1	9.0	2,238	9.8	20.0	4.5	2,238	4.9	15.0	12,900	35.8	18.1
4	LEH0653*±4E^A	24 (610)	1	9.0	2,238	9.8	20.0	4.5	2,238	4.9	15.0	12,900	35.8	18.1
4	LEH0693*±4E^A	24 (610)	1	12.0	2,984	12.8	20.0	6.0	2,984	6.4	15.0	17,050	47.8	24.3
4	LEH0883*±4E^A	24 (610)	1	12.0	2,984	12.8	20.0	6.0	2,984	6.4	15.0	17,050	47.8	24.3
6	LEH1123*±6E^A	30 (763)	1-1/2	19.8	3,356	21.5	40.0	9.9	3,356	10.7	20.0	21,400	64.2	32.1
6	LEH1343*±6E^A	30 (763)	1-1/2	19.8	3,356	21.5	40.0	9.9	3,356	10.7	20.0	21,400	64.2	32.1
6	LEH1563*±6E^A	30 (763)	1-1/2	19.8	3,356	21.5	40.0	9.9	3,356	10.7	20.0	21,400	64.2	32.1
6	LEH1823*±6E^A	30 (763)	1-1/2	19.8	3,356	21.5	40.0	9.9	3,356	10.7	20.0	33,600	87.2	47.5
6	LEH2333*±6E^A	30 (763)	1-1/2	26.4	4,474	28.1	45.0	13.2	4,474	14.0	20.0	49,850	128.4	70.0
4	LEH0983*±4E^A	30 (763)	1-1/2	19.8	3,356	21.5	40.0	9.9	3,356	10.7	20.0	21,400	64.2	32.1
4	LEH1163*±4E^A	30 (763)	1-1/2	19.8	3,356	21.5	40.0	9.9	3,356	10.7	20.0	21,400	64.2	32.1
4	LEH1343*±4E^A	30 (763)	1-1/2	19.8	3,356	21.5	40.0	9.9	3,356	10.7	20.0	21,400	64.2	32.1
4	LEH1583*±4E^A	30 (763)	1-1/2	19.8	3,356	21.5	40.0	9.9	3,356	10.7	20.0	33,600	87.2	47.5
4	LEH2053*±4E^A	30 (763)	1-1/2	26.4	4,474	28.1	45.0	13.2	4,474	14.0	20.0	49,850	128.4	70.0

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

SPECIFICATIONS

Electric Defrost - 60 Hz

FPI	Model	Fan Diameter	HP	3 Phase AC Totally Enclosed Rail Mount				Defrost Heaters	
				575/3/60				Watts	Total Amps
		in (mm)		Amps	Watts	MCA	MOPD		
6	LEH0423*±6E^A	24 (610)	1/2	1.8	746.0	2.0	15.0	9,900	11.1
6	LEH0513*±6E^A	24 (610)	1/2	1.8	746.0	2.0	15.0	9,900	11.1
6	LEH0573*±6E^A	24 (610)	1/2	2.7	1119.0	2.9	15.0	12,900	14.5
6	LEH0713*±6E^A	24 (610)	1/2	2.7	1119.0	2.9	15.0	12,900	14.5
6	LEH0763*±6E^A	24 (610)	1/2	3.6	1492.0	3.8	15.0	17,050	19.1
6	LEH0963*±6E^A	24 (610)	1/2	3.6	1492.0	3.8	15.0	17,050	19.1
4	LEH0373*±4E^A	24 (610)	1/2	1.8	746.0	2.0	15.0	9,900	11.1
4	LEH0473*±4E^A	24 (610)	1/2	1.8	746.0	2.0	15.0	9,900	11.1
4	LEH0513*±4E^A	24 (610)	1/2	2.7	1119.0	2.9	15.0	12,900	14.5
4	LEH0653*±4E^A	24 (610)	1/2	2.7	1119.0	2.9	15.0	12,900	14.5
4	LEH0693*±4E^A	24 (610)	1/2	3.6	1492.0	3.8	15.0	17,050	19.1
4	LEH0883*±4E^A	24 (610)	1/2	3.6	1492.0	3.8	15.0	17,050	19.1
6	LEH1823*±6E^A	30 (763)	1-1/2	7.8	2237.0	8.5	15.0	33,600	34.9
6	LEH2333*±6E^A	30 (763)	1-1/2	11.2	4474.0	11.9	20.0	49,850	56.0
4	LEH1583*±4E^A	30 (763)	1-1/2	7.8	2237.0	8.5	15.0	33,600	34.9
4	LEH2053*±4E^A	30 (763)	1-1/2	11.2	4474.0	11.9	20.0	49,850	56.0

FPI	Model	Fan Diameter	HP	3 Phase AC Open Drip Proof Rail Mount				Defrost Heaters	
				575/3/60				Watts	Total Amps
		in (mm)		Amps	Watts	MCA	MOPD		
6	LEH1123*±6E^A	30 (763)	1-1/2	7.8	2237.0	8.5	15.0	21,400	22.8
6	LEH1343*±6E^A	30 (763)	1-1/2	7.8	2237.0	8.5	15.0	21,400	22.8
6	LEH1563*±6E^A	30 (763)	1-1/2	7.8	2237.0	8.5	15.0	21,400	22.8
4	LEH0983*±4E^A	30 (763)	1-1/2	7.8	2237.0	8.5	15.0	21,400	22.8
4	LEH1163*±4E^A	30 (763)	1-1/2	7.8	2237.0	8.5	15.0	21,400	22.8
4	LEH1343*±4E^A	30 (763)	1-1/2	7.8	2237.0	8.5	15.0	21,400	22.8

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

† = These motors are single phase wired only with 208-230/1/60 and 460/1/60

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

SPECIFICATIONS

Electric Defrost - 60 Hz

FPI	Model	Fan Diameter	HP	PSC Open Drip Proof Rail Mount								Defrost Heaters		
				208-230/3/60				460/3/60				Watts	Total Amps	
		in (mm)		Amps	Watts	MCA	MOPD	Amps	Watts	MCA	MOPD		208-230/3/60	460/3/60
6	LEH0423*±6E^A	24 (610)	1/2 [†]	6.4	746.0	7.2	20.0	3.4	746.0	3.8	15.0	9,900	27.5	13.9
6	LEH0513*±6E^A	24 (610)	1/2 [†]	6.4	746.0	7.2	20.0	3.4	746.0	3.8	15.0	9,900	27.5	13.9
6	LEH0573*±6E^A	24 (610)	1/2 [†]	9.6	1119.0	10.4	20.0	5.1	1119.0	5.5	15.0	12,900	35.8	18.1
6	LEH0713*±6E^A	24 (610)	1/2 [†]	9.6	1119.0	10.4	20.0	5.1	1119.0	5.5	15.0	12,900	35.8	18.1
6	LEH0763*±6E^A	24 (610)	1/2 [†]	12.8	1492.0	13.6	20.0	6.8	1492.0	7.2	15.0	17,050	47.8	24.3
6	LEH0963*±6E^A	24 (610)	1/2 [†]	12.8	1492.0	13.6	20.0	6.8	1492.0	7.2	15.0	17,050	47.8	24.3
4	LEH0373*±4E^A	24 (610)	1/2 [†]	6.4	746.0	7.2	20.0	3.4	746.0	3.8	15.0	9,900	27.5	13.9
4	LEH0473*±4E^A	24 (610)	1/2 [†]	6.4	746.0	7.2	20.0	3.4	746.0	3.8	15.0	9,900	27.5	13.9
4	LEH0513*±4E^A	24 (610)	1/2 [†]	9.6	1119.0	10.4	20.0	5.1	1119.0	5.5	15.0	12,900	35.8	18.1
4	LEH0653*±4E^A	24 (610)	1/2 [†]	9.6	1119.0	10.4	20.0	5.1	1119.0	5.5	15.0	12,900	35.8	18.1
4	LEH0693*±4E^A	24 (610)	1/2 [†]	12.8	1492.0	13.6	20.0	6.8	1492.0	7.2	15.0	17,050	47.8	24.3
4	LEH0883*±4E^A	24 (610)	1/2 [†]	12.8	1492.0	13.6	20.0	6.8	1492.0	7.2	15.0	17,050	47.8	24.3
6	LEH1123*±6E^A	30 (763)	1	13.8	2237.0	15.0	25.0	6.9	2237.0	7.5	15.0	21,400	64.2	32.1
6	LEH1343*±6E^A	30 (763)	1	13.8	2237.0	15.0	25.0	6.9	2237.0	7.5	15.0	21,400	64.2	32.1
6	LEH1563*±6E^A	30 (763)	1-1/2	19.8	3356.0	21.5	40.0	9.9	3356.0	10.7	20.0	21,400	64.2	32.1
6	LEH1823*±6E^A	30 (763)	1-1/2	21.0	3356.0	22.8	40.0	10.5	3356.0	11.4	20.0	33,600	87.2	47.5
6	LEH2333*±6E^A	30 (763)	1-1/2	28.0	4474.0	29.8	45.0	14.0	4474.0	14.9	25.0	49,850	128.4	70.0
4	LEH0983*±4E^A	30 (763)	1	13.8	2237.0	15.0	25.0	6.9	2237.0	7.5	15.0	21,400	64.2	32.1
4	LEH1163*±4E^A	30 (763)	1	13.8	2237.0	15.0	25.0	6.9	2237.0	7.5	15.0	21,400	64.2	32.1
4	LEH1343*±4E^A	30 (763)	1-1/2	19.8	3356.0	21.5	40.0	9.9	3356.0	10.7	20.0	21,400	64.2	32.1
4	LEH1583*±4E^A	30 (763)	1-1/2	21.0	3356.0	22.8	40.0	10.5	3356.0	11.4	20.0	33,600	87.2	47.5
4	LEH2053*±4E^A	30 (763)	1-1/2	28.0	4474.0	29.8	45.0	14.0	4474.0	14.9	25.0	49,850	128.4	70.0

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

† = These motors are single phase wired only with 208-230/1/60 and 460/1/60

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

SPECIFICATIONS

Electric Defrost - 50 Hz

FPI	Model	Fan Diameter	HP	3 Phase AC Open Drip Proof Rail Mount				Defrost Heaters	
				380-400/3/50				Watts	Total Amps
		in (mm)		Amps	Watts	MCA	MOPD		
6	LEH0423*±6E^A	24 (610)	3/4	4.0	1119.0	4.5	15.0	6,760	11.5
6	LEH0513*±6E^A	24 (610)	3/4	4.0	1119.0	4.5	15.0	6,760	11.5
6	LEH0573*±6E^A	24 (610)	3/4	6.0	1678.5	6.5	15.0	8,800	15.0
6	LEH0713*±6E^A	24 (610)	3/4	6.0	1678.5	6.5	15.0	8,800	15.0
6	LEH0763*±6E^A	24 (610)	3/4	8.0	2238.0	8.5	15.0	11,640	20.1
6	LEH0963*±6E^A	24 (610)	3/4	8.0	2238.0	8.5	15.0	11,640	20.1
4	LEH0373*±4E^A	24 (610)	3/4	4.0	1119.0	4.5	15.0	6,760	11.5
4	LEH0473*±4E^A	24 (610)	3/4	4.0	1119.0	4.5	15.0	6,760	11.5
4	LEH0513*±4E^A	24 (610)	3/4	6.0	1678.5	6.5	15.0	8,800	15.0
4	LEH0653*±4E^A	24 (610)	3/4	6.0	1678.5	6.5	15.0	8,800	15.0
4	LEH0693*±4E^A	24 (610)	3/4	8.0	2238.0	8.5	15.0	11,640	20.1
4	LEH0883*±4E^A	24 (610)	3/4	8.0	2238.0	8.5	15.0	11,640	20.1
6	LEH1123*±6E^A	30 (763)	1	6.9	2237.0	7.5	15.0	14,600	26.5
6	LEH1343*±6E^A	30 (763)	1	6.9	2237.0	7.5	15.0	14,600	26.5
6	LEH1563*±6E^A	30 (763)	1-1/2	9.9	3356.0	10.7	20.0	14,600	26.5
6	LEH1823*±6E^A	30 (763)	1-1/2	10.5	3356.0	11.4	20.0	22,930	39.2
6	LEH2333*±6E^A	30 (763)	1-1/2	14.0	4474.0	14.9	25.0	34,050	57.9
4	LEH0983*±4E^A	30 (763)	1	6.9	2237.0	7.5	15.0	14,600	26.5
4	LEH1163*±4E^A	30 (763)	1	6.9	2237.0	7.5	15.0	14,600	26.5
4	LEH1343*±4E^A	30 (763)	1-1/2	9.9	3356.0	10.7	20.0	14,600	26.5
4	LEH1583*±4E^A	30 (763)	1-1/2	10.5	3356.0	11.4	20.0	22,930	39.2
4	LEH2053*±4E^A	30 (763)	1-1/2	14.0	4474.0	14.9	25.0	33,050	57.9

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

SPECIFICATIONS

Electric Defrost - 50 Hz

FPI	Model	Fan Diameter	HP	3 Phase AC Totally Enclosed Rail Mount				Defrost Heaters	
				380-400/3/50				Watts	Total Amps
		in (mm)		Amps	Watts	MCA	MOPD		
6	LEH0423*±6E^A	24 (610)	1	4.6	1492.0	5.2	15.0	6,760	11.5
6	LEH0513*±6E^A	24 (610)	1	4.6	1492.0	5.2	15.0	6,760	11.5
6	LEH0573*±6E^A	24 (610)	1	6.9	2238.0	7.5	15.0	8,800	15.0
6	LEH0713*±6E^A	24 (610)	1	6.9	2238.0	7.5	15.0	8,800	15.0
6	LEH0763*±6E^A	24 (610)	1	9.2	2984.0	9.6	15.0	11,640	20.1
6	LEH0963*±6E^A	24 (610)	1	9.2	2984.0	9.6	15.0	11,640	20.1
4	LEH0373*±4E^A	24 (610)	1	4.6	1492.0	5.2	15.0	6,760	11.5
4	LEH0473*±4E^A	24 (610)	1	4.6	1492.0	5.2	15.0	6,760	11.5
4	LEH0513*±4E^A	24 (610)	1	6.9	2238.0	7.5	15.0	8,800	15.0
4	LEH0653*±4E^A	24 (610)	1	6.9	2238.0	7.5	15.0	8,800	15.0
4	LEH0693*±4E^A	24 (610)	1	9.2	2984.0	9.6	15.0	11,640	20.1
4	LEH0883*±4E^A	24 (610)	1	9.2	2984.0	9.6	15.0	11,640	20.1
6	LEH1123*±6E^A	30 (763)	1-1/2	7.8	3356.0	8.5	15.0	14,600	26.5
6	LEH1343*±6E^A	30 (763)	1-1/2	7.8	3356.0	8.5	15.0	14,600	26.5
6	LEH1563*±6E^A	30 (763)	1-1/2	7.8	3356.0	8.5	15.0	14,600	26.5
6	LEH1823*±6E^A	30 (763)	1-1/2	7.8	3356.0	8.5	15.0	22,930	39.2
6	LEH2333*±6E^A	30 (763)	1-1/2	10.4	4474.0	11.1	15.0	34,050	57.9
4	LEH0983*±4E^A	30 (763)	1-1/2	7.8	3356.0	8.5	15.0	14,600	26.5
4	LEH1163*±4E^A	30 (763)	1-1/2	7.8	3356.0	8.5	15.0	14,600	26.5
4	LEH1343*±4E^A	30 (763)	1-1/2	7.8	3356.0	8.5	15.0	14,600	26.5
4	LEH1583*±4E^A	30 (763)	1-1/2	7.8	3356.0	8.5	15.0	22,930	39.2
4	LEH2053*±4E^A	30 (763)	1-1/2	10.4	4474.0	11.1	15.0	33,050	57.9

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

SPECIFICATIONS

Electric Defrost High CFM - 60 Hz

FPI	Model	Fan Diameter	HP	High CFM Rail Mount								Defrost Heaters		
				208-230/3/60				460/3/60				Watts	Total Amps	
		in (mm)		Amps	Watts	MCA	MOPD	Amps	Watts	MCA	MOPD		208-230/3/60	460/3/60
6	LEH0423*±6E^A	24 (610)	2	12.0	2984.0	13.5	30.0	6.0	2984.0	6.80	15.0	9,900	27.5	13.9
6	LEH0513*±6E^A	24 (610)	2	12.0	2984.0	13.5	30.0	6.0	2984.0	6.80	15.0	9,900	27.5	13.9
6	LEH0573*±6E^A	24 (610)	2	18.0	4476.0	19.5	35.0	9.0	4476.0	9.80	15.0	12,900	35.8	18.1
6	LEH0713*±6E^A	24 (610)	2	18.0	4476.0	19.5	35.0	9.0	4476.0	9.80	15.0	12,900	35.8	18.1
6	LEH0763*±6E^A	24 (610)	2	24.0	5968.0	25.5	40.0	12.0	5968.0	12.80	20.0	17,050	47.8	24.3
6	LEH0963*±6E^A	24 (610)	2	24.0	5968.0	25.5	40.0	12.0	5968.0	12.80	20.0	17,050	47.8	24.3
4	LEH0373*±4E^A	24 (610)	2	12.0	2984.0	13.5	30.0	6.0	2984.0	6.80	15.0	9,900	27.5	13.9
4	LEH0473*±4E^A	24 (610)	2	12.0	2984.0	13.5	30.0	6.0	2984.0	6.80	15.0	9,900	27.5	13.9
4	LEH0513*±4E^A	24 (610)	2	18.0	4476.0	19.5	35.0	9.0	4476.0	9.80	15.0	12,900	35.8	18.1
4	LEH0653*±4E^A	24 (610)	2	18.0	4476.0	19.5	35.0	9.0	4476.0	9.80	15.0	12,900	35.8	18.1
4	LEH0693*±4E^A	24 (610)	2	24.0	5968.0	25.5	40.0	12.0	5968.0	12.80	20.0	17,050	47.8	24.3
4	LEH0883*±4E^A	24 (610)	2	24.0	5968.0	25.5	40.0	12.0	5968.0	12.80	20.0	17,050	47.8	24.3
6	LEH1123*±6E^A	30 (763)	3	24.6	6711.0	26.7	45.0	12.3	6711.0	13.30	25.0	21,400	64.2	32.1
6	LEH1343*±6E^A	30 (763)	3	24.6	6711.0	26.7	45.0	12.3	6711.0	13.30	25.0	21,400	64.2	32.1
6	LEH1563*±6E^A	30 (763)	3	24.6	6711.0	26.7	45.0	12.3	6711.0	13.30	25.0	21,400	64.2	32.1
6	LEH1823*±6E^A	30 (763)	3	24.6	6711.0	26.7	45.0	12.3	6711.0	13.30	25.0	33,600	87.2	47.5
6	LEH2333*±6E^A	30 (763)	3	32.8	8948.0	34.9	55.0	16.4	8948.0	17.40	25.0	49,850	128.4	70.0
4	LEH0983*±4E^A	30 (763)	3	24.6	6711.0	26.7	45.0	12.3	6711.0	13.30	25.0	21,400	64.2	32.1
4	LEH1163*±4E^A	30 (763)	3	24.6	6711.0	26.7	45.0	12.3	6711.0	13.30	25.0	21,400	64.2	32.1
4	LEH1343*±4E^A	30 (763)	3	24.6	6711.0	26.7	45.0	12.3	6711.0	13.30	25.0	21,400	64.2	32.1
4	LEH1583*±4E^A	30 (763)	3	24.6	6711.0	26.7	45.0	12.3	6711.0	13.30	25.0	33,600	87.2	47.5
4	LEH2053*±4E^A	30 (763)	3	32.8	8948.0	34.9	55.0	16.4	8948.0	17.40	25.0	49,850	128.4	70.0

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

High CFM models can handle external static pressure up to 1/2" of water

High CFM models are designed for operation below 15°F SST

CFM is at 0.0 external static pressure

TD = Temperature Difference = (Room temperature - saturated suction temperature)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A2L PERFORMANCE DATA

Application Capacity: Low Temperature Hot Gas Defrost - 60 Hz, Electric Drain Pan

FPI	Model	R-455A			R-454C			Fan Data				Air Throw	
		Application Capacity ¹			Application Capacity ¹								
		10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.	10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.	No. of Fans	Dia. in (mm)	CFM	m ³ H	Standard	w/Collar
6	LEH0423*Y6H^A	46,600	13,700	166	40,700	11,900	246	2	24 (610)	9,000	15,291	70 (21)	85 (26)
6	LEH0513*Y6H^A	58,000	17,000	203	50,600	14,800	300	2	24 (610)	9,000	15,291	70 (21)	85 (26)
6	LEH0573*Y6H^A	65,600	19,200	174	57,300	16,800	258	3	24 (610)	12,600	21,408	70 (21)	85 (26)
6	LEH0713*Y6H^A	77,000	22,600	209	67,200	19,700	310	3	24 (610)	12,600	21,408	70 (21)	85 (26)
6	LEH0763*Y6H^A	84,600	24,800	375	73,900	21,700	1,111	4	24 (610)	16,800	28,543	70 (21)	85 (26)
6	LEH0963*Y6H^A	99,800	29,200	419	87,200	25,600	1,241	4	24 (610)	16,800	28,543	70 (21)	85 (26)
4	LEH0373*Y4H^A	40,900	12,000	166	35,700	10,500	246	2	24 (610)	9,400	15,971	70 (21)	85 (26)
4	LEH0473*Y4H^A	50,400	14,800	203	44,000	12,900	300	2	24 (610)	9,400	15,971	70 (21)	85 (26)
4	LEH0513*Y4H^A	57,000	16,700	174	49,800	14,600	258	3	24 (610)	13,200	22,427	70 (21)	85 (26)
4	LEH0653*Y4H^A	66,500	19,500	209	58,100	17,000	310	3	24 (610)	13,200	22,427	70 (21)	85 (26)
4	LEH0693*Y4H^A	73,200	21,500	375	63,900	18,700	1,111	4	24 (610)	17,600	29,903	70 (21)	85 (26)
4	LEH0883*Y4H^A	86,500	25,400	419	75,500	22,100	1,241	4	24 (610)	17,600	29,903	70 (21)	85 (26)
6	LEH1123*Y6H^A	106,400	31,200	369	93,000	27,300	1,092	3	30 (763)	20,700	35,170	100 (30)	115 (35)
6	LEH1343*Y6H^A	127,300	37,300	370	111,200	32,600	1,096	3	30 (763)	20,700	35,170	100 (30)	115 (35)
6	LEH1563*Y6H^A	148,200	43,400	439	129,500	38,000	1,300	3	30 (763)	24,300	41,286	100 (30)	115 (35)
6	LEH1823*Y6H^A	172,900	50,700	1,608	151,100	44,300	2,384	3	30 (763)	26,550	45,109	120 (37)	140 (43)
6	LEH2333*Y6H^A	221,400	64,900	2,172	193,400	56,700	1,610**	4	30 (763)	35,400	60,145	120 (37)	140 (43)
4	LEH0983*Y4H^A	93,100	27,300	369	81,300	23,800	1,092	3	30 (763)	21,600	36,699	100 (30)	115 (35)
4	LEH1163*Y4H^A	110,200	32,300	370	96,300	28,200	1,096	3	30 (763)	21,600	36,699	100 (30)	115 (35)
4	LEH1343*Y4H^A	127,300	37,300	436	111,200	32,600	1,292	3	30 (763)	25,200	42,815	100 (30)	115 (35)
4	LEH1583*Y4H^A	150,100	44,000	1,603	131,100	38,400	2,376	3	30 (763)	27,600	46,893	120 (37)	140 (43)
4	LEH2053*Y4H^A	194,800	57,100	2,025	170,200	49,900	1,501**	4	30 (763)	36,800	62,524	120 (37)	140 (43)

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

** = Releasable charge is larger than Mmax. Ventilation is required.

^ = Motor Code Designator (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A2L PERFORMANCE DATA

Application Capacity: Low Temperature Hot Gas Defrost - 60 Hz, Electric Drain Pan

FPI	Model	R-454A			Fan Data				Air Throw	
		Application Capacity ¹			No. of Fans	Dia. in (mm)	CFM	m ³ H	Standard	w/Collar
		10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.					ft (m)	ft (m)
6	LEH0423*Y6H^A	47,500	13,900	257	2	24 (610)	9,000	15,291	70 (21)	85 (26)
6	LEH0513*Y6H^A	59,200	17,300	313	2	24 (610)	9,000	15,291	70 (21)	85 (26)
6	LEH0573*Y6H^A	66,900	19,600	269	3	24 (610)	12,600	21,408	70 (21)	85 (26)
6	LEH0713*Y6H^A	78,600	23,000	323	3	24 (610)	12,600	21,408	70 (21)	85 (26)
6	LEH0763*Y6H^A	86,300	25,300	1,159	4	24 (610)	16,800	28,543	70 (21)	85 (26)
6	LEH0963*Y6H^A	101,900	29,900	1,295	4	24 (610)	16,800	28,543	70 (21)	85 (26)
4	LEH0373*Y4H^A	41,700	12,200	257	2	24 (610)	9,400	15,971	70 (21)	85 (26)
4	LEH0473*Y4H^A	51,400	15,100	313	2	24 (610)	9,400	15,971	70 (21)	85 (26)
4	LEH0513*Y4H^A	58,200	17,100	269	3	24 (610)	13,200	22,427	70 (21)	85 (26)
4	LEH0653*Y4H^A	67,900	19,900	323	3	24 (610)	13,200	22,427	70 (21)	85 (26)
4	LEH0693*Y4H^A	74,700	21,900	1,159	4	24 (610)	17,600	29,903	70 (21)	85 (26)
4	LEH0883*Y4H^A	88,300	25,900	1,295	4	24 (610)	17,600	29,903	70 (21)	85 (26)
6	LEH1123*Y6H^A	108,600	31,800	1,140	3	30 (763)	20,700	35,170	100 (30)	115 (35)
6	LEH1343*Y6H^A	130,000	38,100	1,143	3	30 (763)	20,700	35,170	100 (30)	115 (35)
6	LEH1563*Y6H^A	151,300	44,300	1,356	3	30 (763)	24,300	41,286	100 (30)	115 (35)
6	LEH1823*Y6H^A	176,500	51,700	2,485	3	30 (763)	26,550	45,109	120 (37)	140 (43)
6	LEH2333*Y6H^A	226,000	66,200	1,677**	4	30 (763)	35,400	60,145	120 (37)	140 (43)
4	LEH0983*Y4H^A	95,100	27,900	1,140	3	30 (763)	21,600	36,699	100 (30)	115 (35)
4	LEH1163*Y4H^A	112,500	33,000	1,143	3	30 (763)	21,600	36,699	100 (30)	115 (35)
4	LEH1343*Y4H^A	130,000	38,100	1,348	3	30 (763)	25,200	42,815	100 (30)	115 (35)
4	LEH1583*Y4H^A	153,300	44,900	2,476	3	30 (763)	27,600	46,893	120 (37)	140 (43)
4	LEH2053*Y4H^A	198,900	58,300	1,565**	4	30 (763)	36,800	62,524	120 (37)	140 (43)

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

** = Releasable charge is larger than Mmax. Ventilation is required.

^ = Motor Code Designator (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A2L PERFORMANCE DATA

Application Capacity: Low Temperature Hot Gas Defrost - 60 Hz, Hot Gas Drain Pan

FPI	Model	R-455A			R-454C			Fan Data				Air Throw	
		Application Capacity ¹			Application Capacity ¹								
		10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.	10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.	No. of Fans	Dia. in (mm)	CFM	m ³ H	Standard	w/Collar
6	LEH0423*Y6H^A	46,600	13,700	236	40,700	11,900	350	2	24 (610)	9,000	15,291	70 (21)	85 (26)
6	LEH0513*Y6H^A	58,000	17,000	272	50,600	14,800	404	2	24 (610)	9,000	15,291	70 (21)	85 (26)
6	LEH0573*Y6H^A	65,600	19,200	254	57,300	16,800	376	3	24 (610)	12,600	21,408	70 (21)	85 (26)
6	LEH0713*Y6H^A	77,000	22,600	289	67,200	19,700	428	3	24 (610)	12,600	21,408	70 (21)	85 (26)
6	LEH0763*Y6H^A	84,600	24,800	464	73,900	21,700	1,375	4	24 (610)	16,800	28,543	70 (21)	85 (26)
6	LEH0963*Y6H^A	99,800	29,200	508	87,200	25,600	1,505	4	24 (610)	16,800	28,543	70 (21)	85 (26)
4	LEH0373*Y4H^A	40,900	12,000	236	35,700	10,500	350	2	24 (610)	9,400	15,971	70 (21)	85 (26)
4	LEH0473*Y4H^A	50,400	14,800	272	44,000	12,900	404	2	24 (610)	9,400	15,971	70 (21)	85 (26)
4	LEH0513*Y4H^A	57,000	16,700	254	49,800	14,600	376	3	24 (610)	13,200	22,427	70 (21)	85 (26)
4	LEH0653*Y4H^A	66,500	19,500	289	58,100	17,000	428	3	24 (610)	13,200	22,427	70 (21)	85 (26)
4	LEH0693*Y4H^A	73,200	21,500	464	63,900	18,700	1,375	4	24 (610)	17,600	29,903	70 (21)	85 (26)
4	LEH0883*Y4H^A	86,500	25,400	508	75,500	22,100	1,505	4	24 (610)	17,600	29,903	70 (21)	85 (26)
6	LEH1123*Y6H^A	106,400	31,200	485	93,000	27,300	1,435	3	30 (763)	20,700	35,170	100 (30)	115 (35)
6	LEH1343*Y6H^A	127,300	37,300	486	111,200	32,600	1,438	3	30 (763)	20,700	35,170	100 (30)	115 (35)
6	LEH1563*Y6H^A	148,200	43,400	1,066	129,500	38,000	1,579	3	30 (763)	24,300	41,286	100 (30)	115 (35)
6	LEH1823*Y6H^A	172,900	50,700	1,856	151,100	44,300	1,376**	3	30 (763)	26,550	45,109	120 (37)	140 (43)
6	LEH2333*Y6H^A	221,400	64,900	2,253	193,400	56,700	1,670**	4	30 (763)	35,400	60,145	120 (37)	140 (43)
4	LEH0983*Y4H^A	93,100	27,300	485	81,300	23,800	1,435	3	30 (763)	21,600	36,699	100 (30)	115 (35)
4	LEH1163*Y4H^A	110,200	32,300	486	96,300	28,200	1,438	3	30 (763)	21,600	36,699	100 (30)	115 (35)
4	LEH1343*Y4H^A	127,300	37,300	1,063	111,200	32,600	1,575	3	30 (763)	25,200	42,815	100 (30)	115 (35)
4	LEH1583*Y4H^A	150,100	44,000	1,851	131,100	38,400	1,372**	3	30 (763)	27,600	46,893	120 (37)	140 (43)
4	LEH2053*Y4H^A	194,800	57,100	2,180	170,200	49,900	1,615**	4	30 (763)	36,800	62,524	120 (37)	140 (43)

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

** = Releasable charge is larger than Mmax. Ventilation is required.

^ = Motor Code Designator (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A2L PERFORMANCE DATA

Application Capacity: Low Temperature Hot Gas Defrost - 60 Hz, Hot Gas Drain Pan

FPI	Model	R-454A			Fan Data				Air Throw	
		Application Capacity ¹			No. of Fans	Dia. in (mm)	CFM	m ³ H	Standard	w/Collar
		10°F TD -20°F FSST	6°C TD -29°C SST	Room Area Min.					ft (m)	ft (m)
6	LEH0423*Y6H^A	47,500	13,900	365	2	24 (610)	9,000	15,291	70 (21)	85 (26)
6	LEH0513*Y6H^A	59,200	17,300	421	2	24 (610)	9,000	15,291	70 (21)	85 (26)
6	LEH0573*Y6H^A	66,900	19,600	392	3	24 (610)	12,600	21,408	70 (21)	85 (26)
6	LEH0713*Y6H^A	78,600	23,000	446	3	24 (610)	12,600	21,408	70 (21)	85 (26)
6	LEH0763*Y6H^A	86,300	25,300	1,435	4	24 (610)	16,800	28,543	70 (21)	85 (26)
6	LEH0963*Y6H^A	101,900	29,900	1,571	4	24 (610)	16,800	28,543	70 (21)	85 (26)
4	LEH0373*Y4H^A	41,700	12,200	365	2	24 (610)	9,400	15,971	70 (21)	85 (26)
4	LEH0473*Y4H^A	51,400	15,100	421	2	24 (610)	9,400	15,971	70 (21)	85 (26)
4	LEH0513*Y4H^A	58,200	17,100	392	3	24 (610)	13,200	22,427	70 (21)	85 (26)
4	LEH0653*Y4H^A	67,900	19,900	446	3	24 (610)	13,200	22,427	70 (21)	85 (26)
4	LEH0693*Y4H^A	74,700	21,900	1,435	4	24 (610)	17,600	29,903	70 (21)	85 (26)
4	LEH0883*Y4H^A	88,300	25,900	1,571	4	24 (610)	17,600	29,903	70 (21)	85 (26)
6	LEH1123*Y6H^A	108,600	31,800	1,498	3	30 (763)	20,700	35,170	100 (30)	115 (35)
6	LEH1343*Y6H^A	130,000	38,100	1,501	3	30 (763)	20,700	35,170	100 (30)	115 (35)
6	LEH1563*Y6H^A	151,300	44,300	1,649	3	30 (763)	24,300	41,286	100 (30)	115 (35)
6	LEH1823*Y6H^A	176,500	51,700	1,435**	3	30 (763)	26,550	45,109	120 (37)	140 (43)
6	LEH2333*Y6H^A	226,000	66,200	1,742**	4	30 (763)	35,400	60,145	120 (37)	140 (43)
4	LEH0983*Y4H^A	95,100	27,900	1,498	3	30 (763)	21,600	36,699	100 (30)	115 (35)
4	LEH1163*Y4H^A	112,500	33,000	1,501	3	30 (763)	21,600	36,699	100 (30)	115 (35)
4	LEH1343*Y4H^A	130,000	38,100	1,644	3	30 (763)	25,200	42,815	100 (30)	115 (35)
4	LEH1583*Y4H^A	153,300	44,900	1,430**	3	30 (763)	27,600	46,893	120 (37)	140 (43)
4	LEH2053*Y4H^A	198,900	58,300	1,686**	4	30 (763)	36,800	62,524	120 (37)	140 (43)

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

** = Releasable charge is larger than Mmax. Ventilation is required.

^ = Motor Code Designator (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A2L PERFORMANCE DATA

Application Capacity: Hot Gas Defrost - 50 Hz, Electric Drain Pan

FPI	Model	R-455A			R-454C			Fan Data				Air Throw	
		Application Capacity ¹			Application Capacity ¹								
		10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.	10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.	No. of Fans	Dia. in (mm)	CFM	m ³ H	Standard ft (m)	w/Collar ft (m)
6	LEH0423*Y6H^A	42,800	12,500	166	37,400	11,000	246	2	24 (610)	8,100	13,762	70 (21)	85 (26)
6	LEH0513*Y6H^A	53,300	15,600	203	46,600	13,700	300	2	24 (610)	8,100	13,762	70 (21)	85 (26)
6	LEH0573*Y6H^A	60,300	17,700	174	52,700	15,400	258	3	24 (610)	11,300	19,199	70 (21)	85 (26)
6	LEH0713*Y6H^A	70,800	20,700	209	61,800	18,100	310	3	24 (610)	11,300	19,199	70 (21)	85 (26)
6	LEH0763*Y6H^A	77,800	22,800	375	68,000	19,900	1,111	4	24 (610)	15,100	25,655	70 (21)	85 (26)
6	LEH0963*Y6H^A	91,800	26,900	419	80,200	23,500	1,241	4	24 (610)	15,100	25,655	70 (21)	85 (26)
4	LEH0373*Y4H^A	37,600	11,000	166	32,900	9,600	246	2	24 (610)	8,500	14,442	70 (21)	85 (26)
4	LEH0473*Y4H^A	46,400	13,600	203	40,500	11,900	300	2	24 (610)	8,500	14,442	70 (21)	85 (26)
4	LEH0513*Y4H^A	52,400	15,400	174	45,800	13,400	258	3	24 (610)	11,900	20,218	70 (21)	85 (26)
4	LEH0653*Y4H^A	61,200	17,900	209	53,500	15,700	310	3	24 (610)	11,900	20,218	70 (21)	85 (26)
4	LEH0693*Y4H^A	67,300	19,700	375	58,800	17,200	1,111	4	24 (610)	15,900	27,014	70 (21)	85 (26)
4	LEH0883*Y4H^A	79,500	23,300	419	69,500	20,400	1,241	4	24 (610)	15,900	27,014	70 (21)	85 (26)
6	LEH1123*Y6H^A	97,900	28,700	369	85,500	25,100	1,092	3	30 (763)	18,600	31,602	90 (27)	100 (30)
6	LEH1343*Y6H^A	117,100	34,300	370	102,300	30,000	1,096	3	30 (763)	18,600	31,602	90 (27)	100 (30)
6	LEH1563*Y6H^A	136,300	39,900	439	119,100	34,900	1,300	3	30 (763)	21,900	37,208	90 (27)	100 (30)
6	LEH1823*Y6H^A	159,000	46,600	1,608	138,900	40,700	2,384	3	30 (763)	23,900	40,606	110 (34)	130 (40)
6	LEH2333*Y6H^A	203,700	59,700	2,172	178,000	52,200	1610**	4	30 (763)	31,900	54,198	110 (34)	130 (40)
4	LEH0983*Y4H^A	85,700	25,100	369	74,900	22,000	1,092	3	30 (763)	19,500	33,131	90 (27)	100 (30)
4	LEH1163*Y4H^A	101,400	29,700	370	88,600	26,000	1,096	3	30 (763)	19,500	33,131	90 (27)	100 (30)
4	LEH1343*Y4H^A	117,100	34,300	436	102,300	30,000	1,292	3	30 (763)	22,700	38,568	90 (27)	100 (30)
4	LEH1583*Y4H^A	138,100	40,500	1,603	120,700	35,400	2,376	3	30 (763)	24,900	42,305	110 (34)	130 (40)
4	LEH2053*Y4H^A	179,200	52,500	2,025	156,500	45,900	1501**	4	30 (763)	33,100	56,237	110 (34)	130 (40)

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

** = Releasable charge is larger than Mmax. Ventilation is required.

^ = Motor Code Designator (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A2L PERFORMANCE DATA

Application Capacity: Hot Gas Defrost - 50 Hz, Electric Drain Pan

FPI	Model	R-454A			Fan Data				Air Throw	
		Application Capacity ¹			No. of Fans	Dia. in (mm)	CFM	m ³ H	Standard	w/Collar
		10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.					ft (m)	ft (m)
6	LEH0423*Y6H^A	43,700	12,800	257	2	24 (610)	8,100	13,762	70 (21)	85 (26)
6	LEH0513*Y6H^A	54,400	15,900	313	2	24 (610)	8,100	13,762	70 (21)	85 (26)
6	LEH0573*Y6H^A	61,600	18,100	269	3	24 (610)	11,300	19,199	70 (21)	85 (26)
6	LEH0713*Y6H^A	72,300	21,200	323	3	24 (610)	11,300	19,199	70 (21)	85 (26)
6	LEH0763*Y6H^A	79,400	23,300	1,159	4	24 (610)	15,100	25,655	70 (21)	85 (26)
6	LEH0963*Y6H^A	93,700	27,500	1,295	4	24 (610)	15,100	25,655	70 (21)	85 (26)
4	LEH0373*Y4H^A	38,400	11,300	257	2	24 (610)	8,500	14,442	70 (21)	85 (26)
4	LEH0473*Y4H^A	47,300	13,900	313	2	24 (610)	8,500	14,442	70 (21)	85 (26)
4	LEH0513*Y4H^A	53,500	15,700	269	3	24 (610)	11,900	20,218	70 (21)	85 (26)
4	LEH0653*Y4H^A	62,500	18,300	323	3	24 (610)	11,900	20,218	70 (21)	85 (26)
4	LEH0693*Y4H^A	68,700	20,100	1,159	4	24 (610)	15,900	27,014	70 (21)	85 (26)
4	LEH0883*Y4H^A	81,200	23,800	1,295	4	24 (610)	15,900	27,014	70 (21)	85 (26)
6	LEH1123*Y6H^A	99,900	29,300	1,140	3	30 (763)	18,600	31,602	90 (27)	100 (30)
6	LEH1343*Y6H^A	119,600	35,100	1,143	3	30 (763)	18,600	31,602	90 (27)	100 (30)
6	LEH1563*Y6H^A	139,200	40,800	1,356	3	30 (763)	21,900	37,208	90 (27)	100 (30)
6	LEH1823*Y6H^A	162,400	47,600	2,485	3	30 (763)	23,900	40,606	110 (34)	130 (40)
6	LEH2333*Y6H^A	208,000	61,000	1677**	4	30 (763)	31,900	54,198	110 (34)	130 (40)
4	LEH0983*Y4H^A	87,500	25,600	1,140	3	30 (763)	19,500	33,131	90 (27)	100 (30)
4	LEH1163*Y4H^A	103,500	30,300	1,143	3	30 (763)	19,500	33,131	90 (27)	100 (30)
4	LEH1343*Y4H^A	119,600	35,100	1,348	3	30 (763)	22,700	38,568	90 (27)	100 (30)
4	LEH1583*Y4H^A	141,000	41,300	2,476	3	30 (763)	24,900	42,305	110 (34)	130 (40)
4	LEH2053*Y4H^A	182,900	53,600	1565**	4	30 (763)	33,100	56,237	110 (34)	130 (40)

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

** = Releasable charge is larger than Mmax. Ventilation is required.

^ = Motor Code Designator (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A2L PERFORMANCE DATA

Application Capacity: Hot Gas Defrost - 50 Hz, Hot Gas Drain Pan

FPI	Model	R-455A			R-454C			Fan Data				Air Throw	
		Application Capacity ¹			Application Capacity ¹							Standard	w/Collar
		10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.	10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.	No. of Fans	Dia. in (mm)	CFM	m ³ H	ft (m)	ft (m)
6	LEH0423*Y6H^A	42,800	12,500	236	37,400	11,000	350	2	24 (610)	8,100	13,762	70 (21)	85 (26)
6	LEH0513*Y6H^A	53,300	15,600	272	46,600	13,700	404	2	24 (610)	8,100	13,762	70 (21)	85 (26)
6	LEH0573*Y6H^A	60,300	17,700	254	52,700	15,400	376	3	24 (610)	11,300	19,199	70 (21)	85 (26)
6	LEH0713*Y6H^A	70,800	20,700	289	61,800	18,100	428	3	24 (610)	11,300	19,199	70 (21)	85 (26)
6	LEH0763*Y6H^A	77,800	22,800	464	68,000	19,900	1,375	4	24 (610)	15,100	25,655	70 (21)	85 (26)
6	LEH0963*Y6H^A	91,800	26,900	508	80,200	23,500	1,505	4	24 (610)	15,100	25,655	70 (21)	85 (26)
4	LEH0373*Y4H^A	37,600	11,000	236	32,900	9,600	350	2	24 (610)	8,500	14,442	70 (21)	85 (26)
4	LEH0473*Y4H^A	46,400	13,600	272	40,500	11,900	404	2	24 (610)	8,500	14,442	70 (21)	85 (26)
4	LEH0513*Y4H^A	52,400	15,400	254	45,800	13,400	376	3	24 (610)	11,900	20,218	70 (21)	85 (26)
4	LEH0653*Y4H^A	61,200	17,900	289	53,500	15,700	428	3	24 (610)	11,900	20,218	70 (21)	85 (26)
4	LEH0693*Y4H^A	67,300	19,700	464	58,800	17,200	1,375	4	24 (610)	15,900	27,014	70 (21)	85 (26)
4	LEH0883*Y4H^A	79,500	23,300	508	69,500	20,400	1,505	4	24 (610)	15,900	27,014	70 (21)	85 (26)
6	LEH1123*Y6H^A	97,900	28,700	485	85,500	25,100	1,435	3	30 (763)	18,600	31,602	90 (27)	100 (30)
6	LEH1343*Y6H^A	117,100	34,300	486	102,300	30,000	1,438	3	30 (763)	18,600	31,602	90 (27)	100 (30)
6	LEH1563*Y6H^A	136,300	39,900	1,066	119,100	34,900	1,579	3	30 (763)	21,900	37,208	90 (27)	100 (30)
6	LEH1823*Y6H^A	159,000	46,600	1,856	138,900	40,700	1,376**	3	30 (763)	23,900	40,606	110 (34)	130 (40)
6	LEH2333*Y6H^A	203,700	59,700	2,253	178,000	52,200	1,670**	4	30 (763)	31,900	54,198	110 (34)	130 (40)
4	LEH0983*Y4H^A	85,700	25,100	485	74,900	22,000	1,435	3	30 (763)	19,500	33,131	90 (27)	100 (30)
4	LEH1163*Y4H^A	101,400	29,700	486	88,600	26,000	1,438	3	30 (763)	19,500	33,131	90 (27)	100 (30)
4	LEH1343*Y4H^A	117,100	34,300	1,063	102,300	30,000	1,575	3	30 (763)	22,700	38,568	90 (27)	100 (30)
4	LEH1583*Y4H^A	138,100	40,500	1,851	120,700	35,400	1,372**	3	30 (763)	24,900	42,305	110 (34)	130 (40)
4	LEH2053*Y4H^A	179,200	52,500	2,180	156,500	45,900	1,615**	4	30 (763)	33,100	56,237	110 (34)	130 (40)

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

** = Releasable charge is larger than Mmax. Ventilation is required.

^ = Motor Code Designator (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A2L PERFORMANCE DATA

Application Capacity: Hot Gas Defrost - 50 Hz, Hot Gas Drain Pan

FPI	Model	R-454A			Fan Data				Air Throw	
		Application Capacity ¹			No. of Fans	Dia. in (mm)	CFM	m ³ H	Standard	w/Collar
		10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.					ft (m)	ft (m)
6	LEH0423*Y6H^A	43,700	12,800	365	2	24 (610)	8,100	13,762	70 (21)	85 (26)
6	LEH0513*Y6H^A	54,400	15,900	421	2	24 (610)	8,100	13,762	70 (21)	85 (26)
6	LEH0573*Y6H^A	61,600	18,100	392	3	24 (610)	11,300	19,199	70 (21)	85 (26)
6	LEH0713*Y6H^A	72,300	21,200	446	3	24 (610)	11,300	19,199	70 (21)	85 (26)
6	LEH0763*Y6H^A	79,400	23,300	1,435	4	24 (610)	15,100	25,655	70 (21)	85 (26)
6	LEH0963*Y6H^A	93,700	27,500	1,571	4	24 (610)	15,100	25,655	70 (21)	85 (26)
4	LEH0373*Y4H^A	38,400	11,300	365	2	24 (610)	8,500	14,442	70 (21)	85 (26)
4	LEH0473*Y4H^A	47,300	13,900	421	2	24 (610)	8,500	14,442	70 (21)	85 (26)
4	LEH0513*Y4H^A	53,500	15,700	392	3	24 (610)	11,900	20,218	70 (21)	85 (26)
4	LEH0653*Y4H^A	62,500	18,300	446	3	24 (610)	11,900	20,218	70 (21)	85 (26)
4	LEH0693*Y4H^A	68,700	20,100	1,435	4	24 (610)	15,900	27,014	70 (21)	85 (26)
4	LEH0883*Y4H^A	81,200	23,800	1,571	4	24 (610)	15,900	27,014	70 (21)	85 (26)
6	LEH1123*Y6H^A	99,900	29,300	1,498	3	30 (763)	18,600	31,602	90 (27)	100 (30)
6	LEH1343*Y6H^A	119,600	35,100	1,501	3	30 (763)	18,600	31,602	90 (27)	100 (30)
6	LEH1563*Y6H^A	139,200	40,800	1,649	3	30 (763)	21,900	37,208	90 (27)	100 (30)
6	LEH1823*Y6H^A	162,400	47,600	1,435**	3	30 (763)	23,900	40,606	110 (34)	130 (40)
6	LEH2333*Y6H^A	208,000	61,000	1,742**	4	30 (763)	31,900	54,198	110 (34)	130 (40)
4	LEH0983*Y4H^A	87,500	25,600	1,498	3	30 (763)	19,500	33,131	90 (27)	100 (30)
4	LEH1163*Y4H^A	103,500	30,300	1,501	3	30 (763)	19,500	33,131	90 (27)	100 (30)
4	LEH1343*Y4H^A	119,600	35,100	1,644	3	30 (763)	22,700	38,568	90 (27)	100 (30)
4	LEH1583*Y4H^A	141,000	41,300	1,430**	3	30 (763)	24,900	42,305	110 (34)	130 (40)
4	LEH2053*Y4H^A	182,900	53,600	1,686**	4	30 (763)	33,100	56,237	110 (34)	130 (40)

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

** = Releasable charge is larger than Mmax. Ventilation is required.

^ = Motor Code Designator (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A2L PERFORMANCE DATA

Application Capacity: Hot Gas Defrost High CFM - 60 Hz, Electric Drain Pan

FPI	Model	R-455A			R-454C			Fan Data				Air Throw	
		Application Capacity ¹			Application Capacity ¹								
		10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.	10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.	No. of Fans	Dia. in (mm)	CFM	m ³ H	Standard ft (m)	w/Collar ft (m)
6	LEH0423*Y6HHA	51,200	15,000	166	44,700	13,100	246	2	24 (610)	11,300	19,199	85 (26)	100 (30)
6	LEH0513*Y6HHA	63,700	18,700	203	55,700	16,300	300	2	24 (610)	11,300	19,199	85 (26)	100 (30)
6	LEH0573*Y6HHA	72,100	21,100	174	63,000	18,500	258	3	24 (610)	15,900	27,014	85 (26)	100 (30)
6	LEH0713*Y6HHA	84,600	24,800	209	74,000	21,700	310	3	24 (610)	15,900	27,014	85 (26)	100 (30)
6	LEH0763*Y6HHA	93,000	27,300	375	81,300	23,800	1111	4	24 (610)	21,200	36,019	85 (26)	100 (30)
6	LEH0963*Y6HHA	109,700	32,100	419	95,900	28,100	1,241	4	24 (610)	21,200	36,019	85 (26)	100 (30)
4	LEH0373*Y4HHA	42,900	12,600	166	37,500	11,000	246	2	24 (610)	12,200	20,728	85 (26)	100 (30)
4	LEH0473*Y4HHA	52,900	15,500	203	46,200	13,500	300	2	24 (610)	12,200	20,728	85 (26)	100 (30)
4	LEH0513*Y4HHA	59,900	17,600	174	52,300	15,300	258	3	24 (610)	17,000	28,883	85 (26)	100 (30)
4	LEH0653*Y4HHA	69,800	20,500	209	61,000	17,900	310	3	24 (610)	17,000	28,883	85 (26)	100 (30)
4	LEH0693*Y4HHA	76,800	22,500	375	67,100	19,700	1,111	4	24 (610)	22,600	38,398	85 (26)	100 (30)
4	LEH0883*Y4HHA	90,800	26,600	419	79,300	23,200	1,241	4	24 (610)	22,600	38,398	85 (26)	100 (30)
6	LEH1123*Y6HHA	117,000	34,300	369	102,300	30,000	1,092	3	30 (763)	23,300	39,587	110 (34)	130 (40)
6	LEH1343*Y6HHA	140,000	41,000	370	122,300	35,800	1,096	3	30 (763)	23,300	39,587	110 (34)	130 (40)
6	LEH1563*Y6HHA	163,000	47,800	439	142,400	41,700	1,300	3	30 (763)	28,000	47,572	110 (34)	130 (40)
6	LEH1823*Y6HHA	190,200	55,700	1,608	166,200	48,700	2,384	3	30 (763)	29,700	50,461	130 (40)	150 (46)
6	LEH2333*Y6HHA	243,500	71,400	2,172	212,700	62,300	1,610**	4	30 (763)	39,600	67,281	130 (40)	150 (46)
4	LEH0983*Y4HHA	97,800	28,700	369	85,400	25,000	1,092	3	30 (763)	23,800	40,436	110 (34)	130 (40)
4	LEH1163*Y4HHA	115,700	33,900	370	101,100	29,600	1,096	3	30 (763)	23,800	40,436	110 (34)	130 (40)
4	LEH1343*Y4HHA	133,700	39,200	436	116,800	34,200	1,292	3	30 (763)	28,600	48,592	110 (34)	130 (40)
4	LEH1583*Y4HHA	157,600	46,200	1,603	137,700	40,400	2,376	3	30 (763)	30,600	51,990	130 (40)	150 (46)
4	LEH2053*Y4HHA	204,500	59,900	2,025	178,700	52,400	1,501**	4	30 (763)	40,800	69,320	130 (40)	150 (46)

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

** = Releasable charge is larger than Mmax. Ventilation is required.

Models Not Meeting DOE Minimum AWEF

A2L PERFORMANCE DATA

Application Capacity: Hot Gas Defrost High CFM - 60 Hz, Electric Drain Pan

FPI	Model	R-454A			Fan Data				Air Throw	
		Application Capacity ¹								
		10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.	No. of Fans	Dia. in (mm)	CFM	m ³ H	Standard ft (m)	w/Collar ft (m)
6	LEH0423*Y6HHA	52,300	15,300	257	2	24 (610)	11,300	19,199	85 (26)	100 (30)
6	LEH0513*Y6HHA	65,100	19,100	313	2	24 (610)	11,300	19,199	85 (26)	100 (30)
6	LEH0573*Y6HHA	73,600	21,600	269	3	24 (610)	15,900	27,014	85 (26)	100 (30)
6	LEH0713*Y6HHA	86,400	25,300	323	3	24 (610)	15,900	27,014	85 (26)	100 (30)
6	LEH0763*Y6HHA	95,000	27,800	1,159	4	24 (610)	21,200	36,019	85 (26)	100 (30)
6	LEH0963*Y6HHA	112,000	32,800	1,295	4	24 (610)	21,200	36,019	85 (26)	100 (30)
4	LEH0373*Y4HHA	43,800	12,800	257	2	24 (610)	12,200	20,728	85 (26)	100 (30)
4	LEH0473*Y4HHA	54,000	15,800	313	2	24 (610)	12,200	20,728	85 (26)	100 (30)
4	LEH0513*Y4HHA	61,100	17,900	269	3	24 (610)	17,000	28,883	85 (26)	100 (30)
4	LEH0653*Y4HHA	71,300	20,900	323	3	24 (610)	17,000	28,883	85 (26)	100 (30)
4	LEH0693*Y4HHA	78,400	23,000	1,159	4	24 (610)	22,600	38,398	85 (26)	100 (30)
4	LEH0883*Y4HHA	92,700	27,200	1,295	4	24 (610)	22,600	38,398	85 (26)	100 (30)
6	LEH1123*Y6HHA	119,500	35,000	1,140	3	30 (763)	23,300	39,587	110 (34)	130 (40)
6	LEH1343*Y6HHA	143,000	41,900	1,143	3	30 (763)	23,300	39,587	110 (34)	130 (40)
6	LEH1563*Y6HHA	166,500	48,800	1,356	3	30 (763)	28,000	47,572	110 (34)	130 (40)
6	LEH1823*Y6HHA	194,200	56,900	2,485	3	30 (763)	29,700	50,461	130 (40)	150 (46)
6	LEH2333*Y6HHA	248,600	72,900	1,677**	4	30 (763)	39,600	67,281	130 (40)	150 (46)
4	LEH0983*Y4HHA	99,800	29,200	1,140	3	30 (763)	23,800	40,436	110 (34)	130 (40)
4	LEH1163*Y4HHA	118,100	34,600	1,143	3	30 (763)	23,800	40,436	110 (34)	130 (40)
4	LEH1343*Y4HHA	136,500	40,000	1,348	3	30 (763)	28,600	48,592	110 (34)	130 (40)
4	LEH1583*Y4HHA	160,900	47,200	2,476	3	30 (763)	30,600	51,990	130 (40)	150 (46)
4	LEH2053*Y4HHA	208,800	61,200	1,565**	4	30 (763)	40,800	69,320	130 (40)	150 (46)

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

** = Releasable charge is larger than Mmax. Ventilation is required.

Models Not Meeting DOE Minimum AWEF

A2L PERFORMANCE DATA

Application Capacity: Hot Gas Defrost High CFM - 60 Hz, Hot Gas Drain Pan

FPI	Model	R-455A			R-454C			Fan Data				Air Throw	
		Application Capacity ¹			Application Capacity ¹								
		10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.	10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.	No. of FanY	Dia. in (mm)	CFM	m ³ H	Ystandard	w/Collar
6	LEH0423*Y6HHA	51,200	15,000	236	44,700	13,100	350	2	24 (610)	11,300	19,199	85 (26)	100 (30)
6	LEH0513*Y6HHA	63,700	18,700	272	55,700	16,300	404	2	24 (610)	11,300	19,199	85 (26)	100 (30)
6	LEH0573*Y6HHA	72,100	21,100	254	63,000	18,500	376	3	24 (610)	15,900	27,014	85 (26)	100 (30)
6	LEH0713*Y6HHA	84,600	24,800	289	74,000	21,700	428	3	24 (610)	15,900	27,014	85 (26)	100 (30)
6	LEH0763*Y6HHA	93,000	27,300	464	81,300	23,800	1375	4	24 (610)	21,200	36,019	85 (26)	100 (30)
6	LEH0963*Y6HHA	109,700	32,100	508	95,900	28,100	1,505	4	24 (610)	21,200	36,019	85 (26)	100 (30)
4	LEH0373*Y4HHA	42,900	12,600	236	37,500	11,000	350	2	24 (610)	12,200	20,728	85 (26)	100 (30)
4	LEH0473*Y4HHA	52,900	15,500	272	46,200	13,500	404	2	24 (610)	12,200	20,728	85 (26)	100 (30)
4	LEH0513*Y4HHA	59,900	17,600	254	52,300	15,300	376	3	24 (610)	17,000	28,883	85 (26)	100 (30)
4	LEH0653*Y4HHA	69,800	20,500	289	61,000	17,900	428	3	24 (610)	17,000	28,883	85 (26)	100 (30)
4	LEH0693*Y4HHA	76,800	22,500	464	67,100	19,700	1,375	4	24 (610)	22,600	38,398	85 (26)	100 (30)
4	LEH0883*Y4HHA	90,800	26,600	508	79,300	23,200	1,505	4	24 (610)	22,600	38,398	85 (26)	100 (30)
6	LEH1123*Y6HHA	117,000	34,300	485	102,300	30,000	1,435	3	30 (763)	23,300	39,587	110 (34)	130 (40)
6	LEH1343*Y6HHA	140,000	41,000	486	122,300	35,800	1,438	3	30 (763)	23,300	39,587	110 (34)	130 (40)
6	LEH1563*Y6HHA	163,000	47,800	1,066	142,400	41,700	1,579	3	30 (763)	28,000	47,572	110 (34)	130 (40)
6	LEH1823*Y6HHA	190,200	55,700	1,856	166,200	48,700	1,376**	3	30 (763)	29,700	50,461	130 (40)	150 (46)
6	LEH2333*Y6HHA	243,500	71,400	2,253	212,700	62,300	1,670**	4	30 (763)	39,600	67,281	130 (40)	150 (46)
4	LEH0983*Y4HHA	97,800	28,700	485	85,400	25,000	1,435	3	30 (763)	23,800	40,436	110 (34)	130 (40)
4	LEH1163*Y4HHA	115,700	33,900	486	101,100	29,600	1,438	3	30 (763)	23,800	40,436	110 (34)	130 (40)
4	LEH1343*Y4HHA	133,700	39,200	1,063	116,800	34,200	1,575	3	30 (763)	28,600	48,592	110 (34)	130 (40)
4	LEH1583*Y4HHA	157,600	46,200	1,851	137,700	40,400	1,372**	3	30 (763)	30,600	51,990	130 (40)	150 (46)
4	LEH2053*Y4HHA	204,500	59,900	2,180	178,700	52,400	1,615**	4	30 (763)	40,800	69,320	130 (40)	150 (46)

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

** = Releasable charge is larger than Mmax. Ventilation is required.

Models Not Meeting DOE Minimum AWEF

A2L PERFORMANCE DATA

Application Capacity: Hot Gas Defrost High CFM - 60 Hz, Hot Gas Drain Pan

FPI	Model	R-454A			Fan Data				Air Throw	
		Application Capacity ¹			No. of Fans	Dia. in (mm)	CFM	m ³ H	Standard	w/Collar
		10°F TD -20°F SST	6°C TD -29°C SST	Room Area Min.					ft (m)	ft (m)
6	LEH0423*Y6HHA	52,300	15,300	365	2	24 (610)	11,300	19,199	85 (26)	100 (30)
6	LEH0513*Y6HHA	65,100	19,100	421	2	24 (610)	11,300	19,199	85 (26)	100 (30)
6	LEH0573*Y6HHA	73,600	21,600	392	3	24 (610)	15,900	27,014	85 (26)	100 (30)
6	LEH0713*Y6HHA	86,400	25,300	446	3	24 (610)	15,900	27,014	85 (26)	100 (30)
6	LEH0763*Y6HHA	95,000	27,800	1,435	4	24 (610)	21,200	36,019	85 (26)	100 (30)
6	LEH0963*Y6HHA	112,000	32,800	1,571	4	24 (610)	21,200	36,019	85 (26)	100 (30)
4	LEH0373*Y4HHA	43,800	12,800	365	2	24 (610)	12,200	20,728	85 (26)	100 (30)
4	LEH0473*Y4HHA	54,000	15,800	421	2	24 (610)	12,200	20,728	85 (26)	100 (30)
4	LEH0513*Y4HHA	61,100	17,900	392	3	24 (610)	17,000	28,883	85 (26)	100 (30)
4	LEH0653*Y4HHA	71,300	20,900	446	3	24 (610)	17,000	28,883	85 (26)	100 (30)
4	LEH0693*Y4HHA	78,400	23,000	1,435	4	24 (610)	22,600	38,398	85 (26)	100 (30)
4	LEH0883*Y4HHA	92,700	27,200	1,571	4	24 (610)	22,600	38,398	85 (26)	100 (30)
6	LEH1123*Y6HHA	119,500	35,000	1,498	3	30 (763)	23,300	39,587	110 (34)	130 (40)
6	LEH1343*Y6HHA	143,000	41,900	1,501	3	30 (763)	23,300	39,587	110 (34)	130 (40)
6	LEH1563*Y6HHA	166,500	48,800	1,649	3	30 (763)	28,000	47,572	110 (34)	130 (40)
6	LEH1823*Y6HHA	194,200	56,900	1,435**	3	30 (763)	29,700	50,461	130 (40)	150 (46)
6	LEH2333*Y6HHA	248,600	72,900	1,742**	4	30 (763)	39,600	67,281	130 (40)	150 (46)
4	LEH0983*Y4HHA	99,800	29,200	1,498	3	30 (763)	23,800	40,436	110 (34)	130 (40)
4	LEH1163*Y4HHA	118,100	34,600	1,501	3	30 (763)	23,800	40,436	110 (34)	130 (40)
4	LEH1343*Y4HHA	136,500	40,000	1,644	3	30 (763)	28,600	48,592	110 (34)	130 (40)
4	LEH1583*Y4HHA	160,900	47,200	1,430**	3	30 (763)	30,600	51,990	130 (40)	150 (46)
4	LEH2053*Y4HHA	208,800	61,200	1,686**	4	30 (763)	40,800	69,320	130 (40)	150 (46)

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

** = Releasable charge is larger than Mmax. Ventilation is required.

Models Not Meeting DOE Minimum AWEF

A1 PERFORMANCE DATA

Application Capacity: Low Temperature Hot Gas Defrost - 60 Hz

FPI	Model	Legacy Model	R-404A/R-507A		R-448A/R-449A		Fan Data				Air Throw	
			Application Capacity ¹		Application Capacity ¹							
			10°F TD -20°F SST	6°C TD -29°C SST	10°F TD -20°F SST	6°C TD -29°C SST	No. of Fans	Dia. in (mm)	CFM	m ³ H	Standard	w/Collar
			BTUH	Watts	BTUH	Watts					ft (m)	ft (m)
6	LEH0423*±6H^A	LHG6450	45,000	13,200	49,000	14,400	2	24 (610)	9,000	15,291	70 (21)	85 (26)
6	LEH0513*±6H^A	LHG6550	54,350	15,900	61,000	17,900	2	24 (610)	9,000	15,291	70 (21)	85 (26)
6	LEH0573*±6H^A	LHG6640	62,700	18,400	69,000	20,200	3	24 (610)	12,600	21,408	70 (21)	85 (26)
6	LEH0713*±6H^A	LHG6740	74,000	21,700	81,000	23,700	3	24 (610)	12,600	21,408	70 (21)	85 (26)
6	LEH0763*±6H^A	LHG6810	81,000	23,700	89,000	26,100	4	24 (610)	16,800	28,543	70 (21)	85 (26)
6	LEH0963*±6H^A	LHG6950	95,000	27,800	105,000	30,800	4	24 (610)	16,800	28,543	70 (21)	85 (26)
4	LEH0373*±4H^A	LHF4400	40,000	11,700	43,000	12,600	2	24 (610)	9,400	15,971	70 (21)	85 (26)
4	LEH0473*±4H^A	LHF4480	48,000	14,100	53,000	15,500	2	24 (610)	9,400	15,971	70 (21)	85 (26)
4	LEH0513*±4H^A	LHF4560	56,000	16,400	60,000	17,600	3	24 (610)	13,200	22,427	70 (21)	85 (26)
4	LEH0653*±4H^A	LHF4650	65,000	19,000	70,000	20,500	3	24 (610)	13,200	22,427	70 (21)	85 (26)
4	LEH0693*±4H^A	LHF4710	71,000	20,800	77,000	22,600	4	24 (610)	17,600	29,903	70 (21)	85 (26)
4	LEH0883*±4H^A	LHF4840	84,000	24,600	91,000	26,700	4	24 (610)	17,600	29,903	70 (21)	85 (26)
6	LEH1123*±6H^A	LHG61020	100,850	29,600	112,000	32,800	3	30 (763)	20,700	35,170	100 (30)	115 (35)
6	LEH1343*±6H^A	LHG61200	120,000	35,200	134,000	39,300	3	30 (763)	20,700	35,170	100 (30)	115 (35)
6	LEH1563*±6H^A	LHG61390	139,000	40,700	156,000	45,700	3	30 (763)	24,300	41,286	100 (30)	115 (35)
6	LEH1823*±6H^A	LHG61650	152,000	44,500	182,000	53,300	3	30 (763)	26,550	45,109	120 (37)	140 (43)
6	LEH2333*±6H^A	LHG62120	203,550	59,700	233,000	68,300	4	30 (763)	35,400	60,145	120 (37)	140 (43)
4	LEH0983*±4H^A	LHF4890	89,000	26,100	98,000	28,700	3	30 (763)	21,600	36,699	100 (30)	115 (35)
4	LEH1163*±4H^A	LHF41050	105,000	30,800	116,000	34,000	3	30 (763)	21,600	36,699	100 (30)	115 (35)
4	LEH1343*±4H^A	LHF41220	122,000	35,800	134,000	39,300	3	30 (763)	25,200	42,815	100 (30)	115 (35)
4	LEH1583*±4H^A	LHF41440	141,150	41,400	158,000	46,300	3	30 (763)	27,600	46,893	120 (37)	140 (43)
4	LEH2053*±4H^A	LHF41860	186,000	54,500	205,000	60,100	4	30 (763)	36,800	62,524	120 (37)	140 (43)

Notes:

¹ Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A1 PERFORMANCE DATA

Application Capacity: Low Temperature Hot Gas Defrost - 60 Hz

FPI	Model	Legacy Model	R-407A/R-407F		R-407C		Fan Data				Air Throw	
			Application Capacity ¹		Application Capacity ¹							
			10°F TD -20°F SST	6°C TD -29°C SST	10°F TD -20°F SST	6°C TD -29°C SST	No. of Fans	Dia. in (mm)	CFM	m³H	Standard	w/Collar
BTUH	Watts	BTUH	Watts	No. of Fans	Dia. in (mm)	CFM	m³H	ft (m)	ft (m)	ft (m)	ft (m)	
6	LEH0423*±6H^A	LHG6450	49,000	14,400	49,000	14,400	2	24 (610)	9,000	15,291	70 (21)	85 (26)
6	LEH0513*±6H^A	LHG6550	61,000	17,900	61,000	17,900	2	24 (610)	9,000	15,291	70 (21)	85 (26)
6	LEH0573*±6H^A	LHG6640	69,000	20,200	69,000	20,200	3	24 (610)	12,600	21,408	70 (21)	85 (26)
6	LEH0713*±6H^A	LHG6740	81,000	23,700	81,000	23,700	3	24 (610)	12,600	21,408	70 (21)	85 (26)
6	LEH0763*±6H^A	LHG6810	89,000	26,100	89,000	26,100	4	24 (610)	16,800	28,543	70 (21)	85 (26)
6	LEH0963*±6H^A	LHG6950	105,000	30,800	105,000	30,800	4	24 (610)	16,800	28,543	70 (21)	85 (26)
4	LEH0373*±4H^A	LHF4400	43,000	12,600	43,000	12,600	2	24 (610)	9,400	15,971	70 (21)	85 (26)
4	LEH0473*±4H^A	LHF4480	53,000	15,500	53,000	15,500	2	24 (610)	9,400	15,971	70 (21)	85 (26)
4	LEH0513*±4H^A	LHF4560	60,000	17,600	60,000	17,600	3	24 (610)	13,200	22,427	70 (21)	85 (26)
4	LEH0653*±4H^A	LHF4650	70,000	20,500	70,000	20,500	3	24 (610)	13,200	22,427	70 (21)	85 (26)
4	LEH0693*±4H^A	LHF4710	77,000	22,600	77,000	22,600	4	24 (610)	17,600	29,903	70 (21)	85 (26)
4	LEH0883*±4H^A	LHF4840	91,000	26,700	91,000	26,700	4	24 (610)	17,600	29,903	70 (21)	85 (26)
6	LEH1123*±6H^A	LHG61020	112,000	32,800	112,000	32,800	3	30 (763)	20,700	35,170	100 (30)	115 (35)
6	LEH1343*±6H^A	LHG61200	134,000	39,300	134,000	39,300	3	30 (763)	20,700	35,170	100 (30)	115 (35)
6	LEH1563*±6H^A	LHG61390	156,000	45,700	156,000	45,700	3	30 (763)	24,300	41,286	100 (30)	115 (35)
6	LEH1823*±6H^A	LHG61650	182,000	53,300	182,000	53,300	3	30 (763)	26,550	45,109	120 (37)	140 (43)
6	LEH2333*±6H^A	LHG62120	233,000	68,300	233,000	68,300	4	30 (763)	35,400	60,145	120 (37)	140 (43)
4	LEH0983*±4H^A	LHF4890	98,000	28,700	98,000	28,700	3	30 (763)	21,600	36,699	100 (30)	115 (35)
4	LEH1163*±4H^A	LHF41050	116,000	34,000	116,000	34,000	3	30 (763)	21,600	36,699	100 (30)	115 (35)
4	LEH1343*±4H^A	LHF41220	134,000	39,300	134,000	39,300	3	30 (763)	25,200	42,815	100 (30)	115 (35)
4	LEH1583*±4H^A	LHF41440	158,000	46,300	158,000	46,300	3	30 (763)	27,600	46,893	120 (37)	140 (43)
4	LEH2053*±4H^A	LHF41860	205,000	60,100	205,000	60,100	4	30 (763)	36,800	62,524	120 (37)	140 (43)

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A1 PERFORMANCE DATA

Application Capacity: Hot Gas Defrost - 50 Hz

FPI	Model	Legacy Model	R-404A/R-507A		R-448A/R-449A		No. of Fans	Fan Data			Air Throw		
			Application Capacity ¹		Application Capacity ¹			Dia.	CFM	m ³ H	Standard	w/Collar	
			10°F TD -20°F SST	6°C TD -29°C SST	10°F TD -20°F SST	6°C TD -29°C SST		in (mm)			ft (m)	ft (m)	
6	LEH0423*±6H^A	LHG6450	41,400	12,100	45,100	13,200	2	24 (610)	8,100	13,762	70 (21)	85 (26)	
6	LEH0513*±6H^A	LHG6550	50,000	14,700	56,100	16,400	2	24 (610)	8,100	13,762	70 (21)	85 (26)	
6	LEH0573*±6H^A	LHG6640	57,700	16,900	63,500	18,600	3	24 (610)	11,300	19,199	70 (21)	85 (26)	
6	LEH0713*±6H^A	LHG6740	68,100	20,000	74,500	21,800	3	24 (610)	11,300	19,199	70 (21)	85 (26)	
6	LEH0763*±6H^A	LHG6810	74,500	21,800	81,900	24,000	4	24 (610)	15,100	25,655	70 (21)	85 (26)	
6	LEH0963*±6H^A	LHG6950	87,400	25,600	96,600	28,300	4	24 (610)	15,100	25,655	70 (21)	85 (26)	
4	LEH0373*±4H^A	LHF4400	36,800	10,800	39,600	11,600	2	24 (610)	8,500	14,442	70 (21)	85 (26)	
4	LEH0473*±4H^A	LHF4480	44,200	13,000	48,800	14,300	2	24 (610)	8,500	14,442	70 (21)	85 (26)	
4	LEH0513*±4H^A	LHF4560	51,500	15,100	55,200	16,200	3	24 (610)	11,900	20,218	70 (21)	85 (26)	
4	LEH0653*±4H^A	LHF4650	59,800	17,500	64,400	18,900	3	24 (610)	11,900	20,218	70 (21)	85 (26)	
4	LEH0693*±4H^A	LHF4710	65,300	19,100	70,800	20,700	4	24 (610)	15,900	27,014	70 (21)	85 (26)	
4	LEH0883*±4H^A	LHF4840	77,300	22,700	83,700	24,500	4	24 (610)	15,900	27,014	70 (21)	85 (26)	
6	LEH1123*±6H^A	LHG61020	92,800	27,200	103,000	30,200	3	30 (763)	18,600	31,602	90 (27)	100 (30)	
6	LEH1343*±6H^A	LHG61200	110,400	32,400	123,300	36,100	3	30 (763)	18,600	31,602	90 (27)	100 (30)	
6	LEH1563*±6H^A	LHG61390	127,900	37,500	143,500	42,100	3	30 (763)	21,900	37,208	90 (27)	100 (30)	
6	LEH1823*±6H^A	LHG61650	139,800	41,000	167,400	49,100	3	30 (763)	23,900	40,606	110 (34)	130 (40)	
6	LEH2333*±6H^A	LHG62120	187,300	54,900	214,400	62,800	4	30 (763)	31,900	54,198	110 (34)	130 (40)	
4	LEH0983*±4H^A	LHF4890	81,900	24,000	90,200	26,400	3	30 (763)	19,500	33,131	90 (27)	100 (30)	
4	LEH1163*±4H^A	LHF41050	96,600	28,300	106,700	31,300	3	30 (763)	19,500	33,131	90 (27)	100 (30)	
4	LEH1343*±4H^A	LHF41220	112,200	32,900	123,300	36,100	3	30 (763)	22,700	38,568	90 (27)	100 (30)	
4	LEH1583*±4H^A	LHF41440	129,900	38,100	145,400	42,600	3	30 (763)	24,900	42,305	110 (34)	130 (40)	
4	LEH2053*±4H^A	LHF41860	171,100	50,100	188,600	55,300	4	30 (763)	33,100	56,237	110 (34)	130 (40)	

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A1 PERFORMANCE DATA

Application Capacity: Hot Gas Defrost - 50 Hz

FPI	Model	Legacy Model	R-407A/R-407F		R-407C		Fan Data				Air Throw			
			Application Capacity ¹		Application Capacity ¹									
			10°F TD -20°F SST	6°C TD -29°C SST	10°F TD -20°F SST	6°C TD -29°C SST	BTUH	Watts	BTUH	Watts	No. of Fans	Dia. in (mm)	CFM	m ³ H
6	LEH0423*±6H^A	LHG6450	45,100	13,200	45,100	13,200	2	24 (610)	8,100	13,762	70 (21)	85 (26)		
6	LEH0513*±6H^A	LHG6550	56,100	16,400	56,100	16,400	2	24 (610)	8,100	13,762	70 (21)	85 (26)		
6	LEH0573*±6H^A	LHG6640	63,500	18,600	63,500	18,600	3	24 (610)	11,300	19,199	70 (21)	85 (26)		
6	LEH0713*±6H^A	LHG6740	74,500	21,800	74,500	21,800	3	24 (610)	11,300	19,199	70 (21)	85 (26)		
6	LEH0763*±6H^A	LHG6810	81,900	24,000	81,900	24,000	4	24 (610)	15,100	25,655	70 (21)	85 (26)		
6	LEH0963*±6H^A	LHG6950	96,600	28,300	96,600	28,300	4	24 (610)	15,100	25,655	70 (21)	85 (26)		
4	LEH0373*±4H^A	LHF4400	39,600	11,600	39,600	11,600	2	24 (610)	8,500	14,442	70 (21)	85 (26)		
4	LEH0473*±4H^A	LHF4480	48,800	14,300	48,800	14,300	2	24 (610)	8,500	14,442	70 (21)	85 (26)		
4	LEH0513*±4H^A	LHF4560	55,200	16,200	55,200	16,200	3	24 (610)	11,900	20,218	70 (21)	85 (26)		
4	LEH0653*±4H^A	LHF4650	64,400	18,900	64,400	18,900	3	24 (610)	11,900	20,218	70 (21)	85 (26)		
4	LEH0693*±4H^A	LHF4710	70,800	20,700	70,800	20,700	4	24 (610)	15,900	27,014	70 (21)	85 (26)		
4	LEH0883*±4H^A	LHF4840	83,700	24,500	83,700	24,500	4	24 (610)	15,900	27,014	70 (21)	85 (26)		
6	LEH1123*±6H^A	LHG61020	103,000	30,200	103,000	30,200	3	30 (763)	18,600	31,602	90 (27)	100 (30)		
6	LEH1343*±6H^A	LHG61200	123,300	36,100	123,300	36,100	3	30 (763)	18,600	31,602	90 (27)	100 (30)		
6	LEH1563*±6H^A	LHG61390	143,500	42,100	143,500	42,100	3	30 (763)	21,900	37,208	90 (27)	100 (30)		
6	LEH1823*±6H^A	LHG61650	167,400	49,100	167,400	49,100	3	30 (763)	23,900	40,606	110 (34)	130 (40)		
6	LEH2333*±6H^A	LHG62120	214,400	62,800	214,400	62,800	4	30 (763)	31,900	54,198	110 (34)	130 (40)		
4	LEH0983*±4H^A	LHF4890	90,200	26,400	90,200	26,400	3	30 (763)	19,500	33,131	90 (27)	100 (30)		
4	LEH1163*±4H^A	LHF41050	106,700	31,300	106,700	31,300	3	30 (763)	19,500	33,131	90 (27)	100 (30)		
4	LEH1343*±4H^A	LHF41220	123,300	36,100	123,300	36,100	3	30 (763)	22,700	38,568	90 (27)	100 (30)		
4	LEH1583*±4H^A	LHF41440	145,400	42,600	145,400	42,600	3	30 (763)	24,900	42,305	110 (34)	130 (40)		
4	LEH2053*±4H^A	LHF41860	188,600	55,300	188,600	55,300	4	30 (763)	33,100	56,237	110 (34)	130 (40)		

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A1 PERFORMANCE DATA

Application Capacity: Hot Gas Defrost High CFM - 60 Hz

FPI	Model	Legacy Model	R-404A/R-507A		R-448A/R-449A		Fan Data				Air Throw	
			Application Capacity ¹		Application Capacity ¹							
			10°F TD -20°F SST	6°C TD -29°C SST	10°F TD -20°F SST	6°C TD -29°C SST	No. of Fans	Dia. in (mm)	CFM	m ³ H	Standard	w/Collar
			BTUH	Watts	BTUH	Watts					ft (m)	ft (m)
6	LEH0423*±6HHA	LHG6450*V	49,500	14,500	53,900	15,800	2	24 (610)	11,300	19,199	85 (26)	100 (30)
6	LEH0513*±6HHA	LHG6550*V	59,800	17,500	67,100	19,700	2	24 (610)	11,300	19,199	85 (26)	100 (30)
6	LEH0573*±6HHA	LHG6640*V	69,000	20,200	75,900	22,200	3	24 (610)	15,900	27,014	85 (26)	100 (30)
6	LEH0713*±6HHA	LHG6740*V	81,400	23,900	89,100	26,100	3	24 (610)	15,900	27,014	85 (26)	100 (30)
6	LEH0763*±6HHA	LHG6810*V	89,100	26,100	97,900	28,700	4	24 (610)	21,200	36,019	85 (26)	100 (30)
6	LEH0963*±6HHA	LHG6950*V	104,500	30,600	115,500	33,800	4	24 (610)	21,200	36,019	85 (26)	100 (30)
4	LEH0373*±4HHA	LHF4400*V	42,000	12,300	45,150	13,200	2	24 (610)	12,200	20,728	85 (26)	100 (30)
4	LEH0473*±4HHA	LHF4480*V	50,400	14,800	55,650	16,300	2	24 (610)	12,200	20,728	85 (26)	100 (30)
4	LEH0513*±4HHA	LHF4560*V	58,800	17,200	63,000	18,500	3	24 (610)	17,000	28,883	85 (26)	100 (30)
4	LEH0653*±4HHA	LHF4650*V	68,250	20,000	73,500	21,500	3	24 (610)	17,000	28,883	85 (26)	100 (30)
4	LEH0693*±4HHA	LHF4710*V	74,550	21,800	80,850	23,700	4	24 (610)	22,600	38,398	85 (26)	100 (30)
4	LEH0883*±4HHA	LHF4840*V	88,200	25,800	95,550	28,000	4	24 (610)	22,600	38,398	85 (26)	100 (30)
6	LEH1123*±6HHA	LHG61020*V	110,900	32,500	123,200	36,100	3	30 (763)	23,300	39,587	110 (34)	130 (40)
6	LEH1343*±6HHA	LHG61200*V	132,000	38,700	147,400	43,200	3	30 (763)	23,300	39,587	110 (34)	130 (40)
6	LEH1563*±6HHA	LHG61390*V	152,900	44,800	171,600	50,300	3	30 (763)	28,000	47,572	110 (34)	130 (40)
6	LEH1823*±6HHA	LHG61650*V	167,200	49,000	200,200	58,700	3	30 (763)	29,700	50,461	130 (40)	150 (46)
6	LEH2333*±6HHA	LHG62120*V	223,900	65,600	256,300	75,100	4	30 (763)	39,600	67,281	130 (40)	150 (46)
4	LEH0983*±4HHA	LHF4890*V	93,450	27,400	102,900	30,200	3	30 (763)	23,800	40,436	110 (34)	130 (40)
4	LEH1163*±4HHA	LHF41050*V	110,250	32,300	121,800	35,700	3	30 (763)	23,800	40,436	110 (34)	130 (40)
4	LEH1343*±4HHA	LHF41220*V	128,100	37,500	140,700	41,200	3	30 (763)	28,600	48,592	110 (34)	130 (40)
4	LEH1583*±4HHA	LHF41440*V	148,200	43,400	165,900	48,600	3	30 (763)	30,600	51,990	130 (40)	150 (46)
4	LEH2053*±4HHA	LHF41860*V	195,300	57,200	215,250	63,100	4	30 (763)	40,800	69,320	130 (40)	150 (46)

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

A1 PERFORMANCE DATA

Application Capacity: Hot Gas Defrost High CFM - 60 Hz

FPI	Model	Legacy Model	R-407A/R-407F		R-407C		Fan Data				Air Throw	
			Application Capacity ¹		Application Capacity ¹							
			10°F TD -20°F SST	6°C TD -29°C SST	10°F TD -20°F SST	6°C TD -29°C SST	No. of Fans	Dia. in (mm)	CFM	m ³ H	Standard	w/Collar
			BTUH	Watts	BTUH	Watts					ft (m)	ft (m)
6	LEH0423*±6HHA	LHG6450*V	53,900	15,800	53,900	15,800	2	24 (610)	11,300	19,199	85 (26)	100 (30)
6	LEH0513*±6HHA	LHG6550*V	67,100	19,700	67,100	19,700	2	24 (610)	11,300	19,199	85 (26)	100 (30)
6	LEH0573*±6HHA	LHG6640*V	75,900	22,200	75,900	22,200	3	24 (610)	15,900	27,014	85 (26)	100 (30)
6	LEH0713*±6HHA	LHG6740*V	89,100	26,100	89,100	26,100	3	24 (610)	15,900	27,014	85 (26)	100 (30)
6	LEH0763*±6HHA	LHG6810*V	97,900	28,700	97,900	28,700	4	24 (610)	21,200	36,019	85 (26)	100 (30)
6	LEH0963*±6HHA	LHG6950*V	115,500	33,800	115,500	33,800	4	24 (610)	21,200	36,019	85 (26)	100 (30)
4	LEH0373*±4HHA	LHF4400*V	45,150	13,200	45,150	13,200	2	24 (610)	12,200	20,728	85 (26)	100 (30)
4	LEH0473*±4HHA	LHF4480*V	55,650	16,300	55,650	16,300	2	24 (610)	12,200	20,728	85 (26)	100 (30)
4	LEH0513*±4HHA	LHF4560*V	63,000	18,500	63,000	18,500	3	24 (610)	17,000	28,883	85 (26)	100 (30)
4	LEH0653*±4HHA	LHF4650*V	73,500	21,500	73,500	21,500	3	24 (610)	17,000	28,883	85 (26)	100 (30)
4	LEH0693*±4HHA	LHF4710*V	80,850	23,700	80,850	23,700	4	24 (610)	22,600	38,398	85 (26)	100 (30)
4	LEH0883*±4HHA	LHF4840*V	95,550	28,000	95,550	28,000	4	24 (610)	22,600	38,398	85 (26)	100 (30)
6	LEH1123*±6HHA	LHG61020*V	123,200	36,100	123,200	36,100	3	30 (763)	23,300	39,587	110 (34)	130 (40)
6	LEH1343*±6HHA	LHG61200*V	147,400	43,200	147,400	43,200	3	30 (763)	23,300	39,587	110 (34)	130 (40)
6	LEH1563*±6HHA	LHG61390*V	171,600	50,300	171,600	50,300	3	30 (763)	28,000	47,572	110 (34)	130 (40)
6	LEH1823*±6HHA	LHG61650*V	200,200	58,700	200,200	58,700	3	30 (763)	29,700	50,461	130 (40)	150 (46)
6	LEH2333*±6HHA	LHG62120*V	256,300	75,100	256,300	75,100	4	30 (763)	39,600	67,281	130 (40)	150 (46)
4	LEH0983*±4HHA	LHF4890*V	102,900	30,200	102,900	30,200	3	30 (763)	23,800	40,436	110 (34)	130 (40)
4	LEH1163*±4HHA	LHF41050*V	121,800	35,700	121,800	35,700	3	30 (763)	23,800	40,436	110 (34)	130 (40)
4	LEH1343*±4HHA	LHF41220*V	140,700	41,200	140,700	41,200	3	30 (763)	28,600	48,592	110 (34)	130 (40)
4	LEH1583*±4HHA	LHF41440*V	165,900	48,600	165,900	48,600	3	30 (763)	30,600	51,990	130 (40)	150 (46)
4	LEH2053*±4HHA	LHF41860*V	215,250	63,100	215,250	63,100	4	30 (763)	40,800	69,320	130 (40)	150 (46)

Notes:

¹ = Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

* = Electrical Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

SPECIFICATIONS

Hot Gas Defrost - 60 Hz

FPI	Model	Fan Diameter	HP	2-Speed EC Motor								Drain Pan Heaters [†]		
				208-230/3/60				460/3/60				Watts	Total Amps	
		in (mm)		Amps	Watts	MCA	MOPD	Amps	Watts	MCA	MOPD		208-230/1/60	460/1/60
6	LEH0423*±6H^A	24 (610)	3/4	4.4	1119.0	5.0	15.0	2.2	1119.0	2.5	15.0	2,100.0	9.2	4.6
6	LEH0513*±6H^A	24 (610)	3/4	4.4	1119.0	5.0	15.0	2.2	1119.0	2.5	15.0	2,100.0	9.2	4.6
6	LEH0573*±6H^A	24 (610)	3/4	6.6	1678.5	7.2	15.0	3.3	1678.5	3.6	15.0	2,700.0	11.8	5.9
6	LEH0713*±6H^A	24 (610)	3/4	6.6	1678.5	7.2	15.0	3.3	1678.5	3.6	15.0	2,700.0	11.8	5.9
6	LEH0763*±6H^A	24 (610)	3/4	8.8	2238.0	9.4	15.0	4.4	2238.0	4.7	15.0	4,000.0	17.4	8.7
6	LEH0963*±6H^A	24 (610)	3/4	8.8	2238.0	9.4	15.0	4.4	2238.0	4.7	15.0	4,000.0	17.4	8.7
4	LEH0373*±4H^A	24 (610)	3/4	4.4	1119.0	5.0	15.0	2.2	1119.0	2.5	15.0	2,100.0	9.2	4.6
4	LEH0473*±4H^A	24 (610)	3/4	4.4	1119.0	5.0	15.0	2.2	1119.0	2.5	15.0	2,100.0	9.2	4.6
4	LEH0513*±4H^A	24 (610)	3/4	6.6	1678.5	7.2	15.0	3.3	1678.5	3.6	15.0	2,700.0	11.8	5.9
4	LEH0653*±4H^A	24 (610)	3/4	6.6	1678.5	7.2	15.0	3.3	1678.5	3.6	15.0	2,700.0	11.8	5.9
4	LEH0693*±4H^A	24 (610)	3/4	8.8	2238.0	9.4	15.0	4.4	2238.0	4.7	15.0	4,000.0	17.4	8.7
4	LEH0883*±4H^A	24 (610)	3/4	8.8	2238.0	9.4	15.0	4.4	2238.0	4.7	15.0	4,000.0	17.4	8.7
6	LEH1123*±6H^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	4,000.0	17.4	8.7
6	LEH1343*±6H^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	4,000.0	17.4	8.7
6	LEH1563*±6H^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	4,000.0	17.4	8.7
6	LEH1823*±6H^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	4,200.0	18.2	9.1
6	LEH2333*±6H^A	30 (763)	1-1/2	14.8	4474.0	15.7	25.0	7.6	4474.0	8.1	15.0	6,450.0	23.2**	14.0
4	LEH0983*±4H^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	4,000.0	17.4	8.7
4	LEH1163*±4H^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	4,000.0	17.4	8.7
4	LEH1343*±4H^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	4,000.0	17.4	8.7
4	LEH1583*±4H^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	4,200.0	18.2	9.1
4	LEH2053*±4H^A	30 (763)	1-1/2	14.8	4474.0	15.7	25.0	7.6	4474.0	8.1	15.0	6,450.0	23.2**	14.0

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

** = This model with 3-Phase drain pan heaters

† = Hot gas drain pan available

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

SPECIFICATIONS

Hot Gas Defrost - 60 Hz

FPI	Model	Fan Diameter	HP	Variable Speed EC Motor								Drain Pan Heaters †		
				208-230/3/60				460/3/60				Watts	Total Amps	
		in (mm)		Amps	Watts	MCA	MOPD	Amps	Watts	MCA	MOPD		208-230/1/60	460/1/60
6	LEH0423*±6H^A	24 (610)	3/4	4.4	1119.0	5.0	15.0	2.2	1119.0	2.5	15.0	2,100.0	9.2	4.6
6	LEH0513*±6H^A	24 (610)	3/4	4.4	1119.0	5.0	15.0	2.2	1119.0	2.5	15.0	2,100.0	9.2	4.6
6	LEH0573*±6H^A	24 (610)	3/4	6.6	1678.5	7.2	15.0	3.3	1678.5	3.6	15.0	2,700.0	11.8	5.9
6	LEH0713*±6H^A	24 (610)	3/4	6.6	1678.5	7.2	15.0	3.3	1678.5	3.6	15.0	2,700.0	11.8	5.9
6	LEH0763*±6H^A	24 (610)	3/4	8.8	2238.0	9.4	15.0	4.4	2238.0	4.7	15.0	4,000.0	17.4	8.7
6	LEH0963*±6H^A	24 (610)	3/4	8.8	2238.0	9.4	15.0	4.4	2238.0	4.7	15.0	4,000.0	17.4	8.7
4	LEH0373*±4H^A	24 (610)	3/4	4.4	1119.0	5.0	15.0	2.2	1119.0	2.5	15.0	2,100.0	9.2	4.6
4	LEH0473*±4H^A	24 (610)	3/4	4.4	1119.0	5.0	15.0	2.2	1119.0	2.5	15.0	2,100.0	9.2	4.6
4	LEH0513*±4H^A	24 (610)	3/4	6.6	1678.5	7.2	15.0	3.3	1678.5	3.6	15.0	2,700.0	11.8	5.9
4	LEH0653*±4H^A	24 (610)	3/4	6.6	1678.5	7.2	15.0	3.3	1678.5	3.6	15.0	2,700.0	11.8	5.9
4	LEH0693*±4H^A	24 (610)	3/4	8.8	2238.0	9.4	15.0	4.4	2238.0	4.7	15.0	4,000.0	17.4	8.7
4	LEH0883*±4H^A	24 (610)	3/4	8.8	2238.0	9.4	15.0	4.4	2238.0	4.7	15.0	4,000.0	17.4	8.7
6	LEH1123*±6H^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	4,000.0	17.4	8.7
6	LEH1343*±6H^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	4,000.0	17.4	8.7
6	LEH1563*±6H^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	4,000.0	17.4	8.7
6	LEH1823*±6H^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	4,200.0	18.2	9.1
6	LEH2333*±6H^A	30 (763)	1-1/2	14.8	4474.0	15.7	25.0	7.6	4474.0	8.1	15.0	6,450.0	23.2**	14.0
4	LEH0983*±4H^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	4,000.0	17.4	8.7
4	LEH1163*±4H^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	4,000.0	17.4	8.7
4	LEH1343*±4H^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	4,000.0	17.4	8.7
4	LEH1583*±4H^A	30 (763)	1-1/2	11.1	3356.0	12.0	20.0	5.7	3356.0	6.2	15.0	4,200.0	18.2	9.1
4	LEH2053*±4H^A	30 (763)	1-1/2	14.8	4474.0	15.7	25.0	7.6	4474.0	8.1	15.0	6,450.0	23.2**	14.0

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

** = This model with 3-Phase drain pan heaters

† = Hot gas drain pan available

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

SPECIFICATIONS

Hot Gas Defrost - 60 Hz

FPI	Model	Fan Diameter	HP	3 Phase AC Open Drip Proof Rail Mount								Drain Pan Heaters †		
				208-230/3/60				460/3/60				Watts	Total Amps	
		in (mm)		Amps	Watts	MCA	MOPD	Amps	Watts	MCA	MOPD		208-230/1/60	460/1/60
6	LEH0423*±6H^A	24 (610)	3/4	8.0	1119.0	9.0	20.0	4.0	1119.0	4.5	15.0	2,100.0	9.2	4.6
6	LEH0513*±6H^A	24 (610)	3/4	8.0	1119.0	9.0	20.0	4.0	1119.0	4.5	15.0	2,100.0	9.2	4.6
6	LEH0573*±6H^A	24 (610)	3/4	12.0	1678.5	13.0	25.0	6.0	1678.5	6.5	15.0	2,700.0	11.8	5.9
6	LEH0713*±6H^A	24 (610)	3/4	12.0	1678.5	13.0	25.0	6.0	1678.5	6.5	15.0	2,700.0	11.8	5.9
6	LEH0763*±6H^A	24 (610)	3/4	16.0	2238.0	17.0	30.0	8.0	2238.0	8.5	15.0	4,000.0	17.4	8.7
6	LEH0963*±6H^A	24 (610)	3/4	16.0	2238.0	17.0	30.0	8.0	2238.0	8.5	15.0	4,000.0	17.4	8.7
4	LEH0373*±4H^A	24 (610)	3/4	8.0	1119.0	9.0	20.0	4.0	1119.0	4.5	15.0	2,100.0	9.2	4.6
4	LEH0473*±4H^A	24 (610)	3/4	8.0	1119.0	9.0	20.0	4.0	1119.0	4.5	15.0	2,100.0	9.2	4.6
4	LEH0513*±4H^A	24 (610)	3/4	12.0	1678.5	13.0	25.0	6.0	1678.5	6.5	15.0	2,700.0	11.8	5.9
4	LEH0653*±4H^A	24 (610)	3/4	12.0	1678.5	13.0	25.0	6.0	1678.5	6.5	15.0	2,700.0	11.8	5.9
4	LEH0693*±4H^A	24 (610)	3/4	16.0	2238.0	17.0	30.0	8.0	2238.0	8.5	15.0	4,000.0	17.4	8.7
4	LEH0883*±4H^A	24 (610)	3/4	16.0	2238.0	17.0	30.0	8.0	2238.0	8.5	15.0	4,000.0	17.4	8.7
6	LEH1123*±6H^A	30 (763)	1	13.8	2237.0	15.0	25.0	6.9	2237.0	7.5	15.0	4,000.0	17.4	8.7
6	LEH1343*±6H^A	30 (763)	1	13.8	2237.0	15.0	25.0	6.9	2237.0	7.5	15.0	4,000.0	17.4	8.7
6	LEH1563*±6H^A	30 (763)	1-1/2	19.8	3356.0	21.5	40.0	9.9	3356.0	10.7	20.0	4,000.0	17.4	8.7
6	LEH1823*±6H^A	30 (763)	1-1/2	21.0	3356.0	22.8	40.0	10.5	3356.0	11.4	20.0	4,200.0	18.2	9.1
6	LEH2333*±6H^A	30 (763)	1-1/2	28.0	4474.0	29.8	45.0	14.0	4474.0	14.9	25.0	6,450.0	23.2**	14.0
4	LEH0983*±4H^A	30 (763)	1	13.8	2237.0	15.0	25.0	6.9	2237.0	7.5	15.0	4,000.0	17.4	8.7
4	LEH1163*±4H^A	30 (763)	1	13.8	2237.0	15.0	25.0	6.9	2237.0	7.5	15.0	4,000.0	17.4	8.7
4	LEH1343*±4H^A	30 (763)	1-1/2	19.8	3356.0	21.5	40.0	9.9	3356.0	10.7	20.0	4,000.0	17.4	8.7
4	LEH1583*±4H^A	30 (763)	1-1/2	21.0	3356.0	22.8	40.0	10.5	3356.0	11.4	20.0	4,200.0	18.2	9.1
4	LEH2053*±4H^A	30 (763)	1-1/2	28.0	4474.0	29.8	45.0	14.0	4474.0	14.9	25.0	6,450.0	23.2**	14.0

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

** = This model with 3-Phase drain pan heaters

† = Hot gas drain pan available

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

SPECIFICATIONS

Hot Gas Defrost - 60 Hz

FPI	Model	Fan Diameter	HP	3 Phase AC Totally Enclosed Rail Mount								Drain Pan Heaters [†]		
				208-230/3/60				460/3/60				Watts	Total Amps	
		in (mm)		Amps	Watts	MCA	MOPD	Amps	Watts	MCA	MOPD		208-230/1/60	460/1/60
6	LEH0423*±6H^A	24 (610)	1	6.0	1492.0	6.8	20.0	3.0	1492.0	3.4	15.0	2,100.0	9.2	4.6
6	LEH0513*±6H^A	24 (610)	1	6.0	1492.0	6.8	20.0	3.0	1492.0	3.4	15.0	2,100.0	9.2	4.6
6	LEH0573*±6H^A	24 (610)	1	9.0	2238.0	9.8	20.0	4.5	2238.0	4.9	15.0	2,700.0	11.8	5.9
6	LEH0713*±6H^A	24 (610)	1	9.0	2238.0	9.8	20.0	4.5	2238.0	4.9	15.0	2,700.0	11.8	5.9
6	LEH0763*±6H^A	24 (610)	1	12.0	2984.0	12.8	20.0	6.0	2984.0	6.4	15.0	4,000.0	17.4	8.7
6	LEH0963*±6H^A	24 (610)	1	12.0	2984.0	12.8	20.0	6.0	2984.0	6.4	15.0	4,000.0	17.4	8.7
4	LEH0373*±4H^A	24 (610)	1	6.0	1492.0	6.8	20.0	3.0	1492.0	3.4	15.0	2,100.0	9.2	4.6
4	LEH0473*±4H^A	24 (610)	1	6.0	1492.0	6.8	20.0	3.0	1492.0	3.4	15.0	2,100.0	9.2	4.6
4	LEH0513*±4H^A	24 (610)	1	9.0	2238.0	9.8	20.0	4.5	2238.0	4.9	15.0	2,700.0	11.8	5.9
4	LEH0653*±4H^A	24 (610)	1	9.0	2238.0	9.8	20.0	4.5	2238.0	4.9	15.0	2,700.0	11.8	5.9
4	LEH0693*±4H^A	24 (610)	1	12.0	2984.0	12.8	20.0	6.0	2984.0	6.4	15.0	4,000.0	17.4	8.7
4	LEH0883*±4H^A	24 (610)	1	12.0	2984.0	12.8	20.0	6.0	2984.0	6.4	15.0	4,000.0	17.4	8.7
6	LEH1123*±6H^A	30 (763)	1-1/2	19.8	3356.0	21.5	40.0	9.9	3356.0	10.7	20.0	4,000.0	17.4	8.7
6	LEH1343*±6H^A	30 (763)	1-1/2	19.8	3356.0	21.5	40.0	9.9	3356.0	10.7	20.0	4,000.0	17.4	8.7
6	LEH1563*±6H^A	30 (763)	1-1/2	19.8	3356.0	21.5	40.0	9.9	3356.0	10.7	20.0	4,000.0	17.4	8.7
6	LEH1823*±6H^A	30 (763)	1-1/2	19.8	3356.0	21.5	40.0	9.9	3356.0	10.7	20.0	4,200.0	18.2	9.1
6	LEH2333*±6H^A	30 (763)	1-1/2	26.4	4474.0	28.1	45.0	13.2	4474.0	14.0	20.0	6,450.0	23.2**	14.0
4	LEH0983*±4H^A	30 (763)	1-1/2	19.8	3356.0	21.5	40.0	9.9	3356.0	10.7	20.0	4,000.0	17.4	8.7
4	LEH1163*±4H^A	30 (763)	1-1/2	19.8	3356.0	21.5	40.0	9.9	3356.0	10.7	20.0	4,000.0	17.4	8.7
4	LEH1343*±4H^A	30 (763)	1-1/2	19.8	3356.0	21.5	40.0	9.9	3356.0	10.7	20.0	4,000.0	17.4	8.7
4	LEH1583*±4H^A	30 (763)	1-1/2	19.8	3356.0	21.5	40.0	9.9	3356.0	10.7	20.0	4,200.0	18.2	9.1
4	LEH2053*±4H^A	30 (763)	1-1/2	26.4	4474.0	28.1	45.0	13.2	4474.0	14.0	20.0	6,450.0	23.2**	14.0

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

** = This model with 3-Phase drain pan heaters

† = Hot gas drain pan available

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

SPECIFICATIONS

Hot Gas Defrost - 60 Hz

FPI	Model	Fan Diameter	HP	3 Phase AC Totally Enclosed Rail Mount				Drain Pan Heaters †	
				575/3/60				Watts	Total Amps
		in (mm)		Amps	Watts	MCA	MOPD		
6	LEH0423*±6H^A	24 (610)	1/2	1.8	746.0	2.0	15.0	2,100.0	3.7
6	LEH0513*±6H^A	24 (610)	1/2	1.8	746.0	2.0	15.0	2,100.0	3.7
6	LEH0573*±6H^A	24 (610)	1/2	2.7	1119.0	2.9	15.0	2,700.0	4.7
6	LEH0713*±6H^A	24 (610)	1/2	2.7	1119.0	2.9	15.0	2,700.0	4.7
6	LEH0763*±6H^A	24 (610)	1/2	3.6	1492.0	3.8	15.0	4,000.0	6.9
6	LEH0963*±6H^A	24 (610)	1/2	3.6	1492.0	3.8	15.0	4,000.0	6.9
4	LEH0373*±4H^A	24 (610)	1/2	1.8	746.0	2.0	15.0	2,100.0	3.7
4	LEH0473*±4H^A	24 (610)	1/2	1.8	746.0	2.0	15.0	2,100.0	3.7
4	LEH0513*±4H^A	24 (610)	1/2	2.7	1119.0	2.9	15.0	2,700.0	4.7
4	LEH0653*±4H^A	24 (610)	1/2	2.7	1119.0	2.9	15.0	2,700.0	4.7
4	LEH0693*±4H^A	24 (610)	1/2	3.6	1492.0	3.8	15.0	4,000.0	6.9
4	LEH0883*±4H^A	24 (610)	1/2	3.6	1492.0	3.8	15.0	4,000.0	6.9
6	LEH1823*±6H^A	30 (763)	1-1/2	7.8	2237.0	8.5	15.0	4,200.0	7.3
6	LEH2333*±6H^A	30 (763)	1-1/2	11.2	4474.0	11.9	20.0	6,450.0	11.2
4	LEH1583*±4H^A	30 (763)	1-1/2	7.8	2237.0	8.5	15.0	4,200.0	7.3
4	LEH2053*±4H^A	30 (763)	1-1/2	11.2	4474.0	11.9	20.0	6,450.0	11.2

FPI	Model	Fan Diameter	HP	3 Phase AC Open Drip Proof Rail Mount				Drain Pan Heaters †	
				575/3/60				Watts	Total Amps
		in (mm)		Amps	Watts	MCA	MOPD		
6	LEH1123*±6H^A	30 (763)	1-1/2	7.8	2237.0	8.5	15.0	4,000.0	6.9
6	LEH1343*±6H^A	30 (763)	1-1/2	7.8	2237.0	8.5	15.0	4,000.0	6.9
6	LEH1563*±6H^A	30 (763)	1-1/2	7.8	2237.0	8.5	15.0	4,000.0	6.9
4	LEH0983*±4H^A	30 (763)	1-1/2	7.8	2237.0	8.5	15.0	4,000.0	6.9
4	LEH1163*±4H^A	30 (763)	1-1/2	7.8	2237.0	8.5	15.0	4,000.0	6.9
4	LEH1343*±4H^A	30 (763)	1-1/2	7.8	2237.0	8.5	15.0	4,000.0	6.9

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

† = Hot gas drain pan available

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

SPECIFICATIONS

Hot Gas Defrost - 60 Hz

FPI	Model	Fan Diameter	HP	PSC Open Drip Proof Rail Mount								Drain Pan Heaters [†]		
				208-230/1/60				460/1/60				Watts	Total Amps	
		in (mm)		Amps	Watts	MCA	MOPD	Amps	Watts	MCA	MOPD		208-230/1/60	460/1/60
6	LEH0423*±6H^A	24 (610)	1/2	6.4	746.0	7.2	20.0	3.4	746.0	3.8	15.0	2,100.0	9.2	4.6
6	LEH0513*±6H^A	24 (610)	1/2	6.4	746.0	7.2	20.0	3.4	746.0	3.8	15.0	2,100.0	9.2	4.6
6	LEH0573*±6H^A	24 (610)	1/2	9.6	1119.0	10.4	20.0	5.1	1119.0	5.5	15.0	2,700.0	11.8	5.9
6	LEH0713*±6H^A	24 (610)	1/2	9.6	1119.0	10.4	20.0	5.1	1119.0	5.5	15.0	2,700.0	11.8	5.9
6	LEH0763*±6H^A	24 (610)	1/2	12.8	1492.0	13.6	20.0	6.8	1492.0	7.2	15.0	4,000.0	17.4	8.7
6	LEH0963*±6H^A	24 (610)	1/2	12.8	1492.0	13.6	20.0	6.8	1492.0	7.2	15.0	4,000.0	17.4	8.7
4	LEH0373*±4H^A	24 (610)	1/2	6.4	746.0	7.2	20.0	3.4	746.0	3.8	15.0	2,100.0	9.2	4.6
4	LEH0473*±4H^A	24 (610)	1/2	6.4	746.0	7.2	20.0	3.4	746.0	3.8	15.0	2,100.0	9.2	4.6
4	LEH0513*±4H^A	24 (610)	1/2	9.6	1119.0	10.4	20.0	5.1	1119.0	5.5	15.0	2,700.0	11.8	5.9
4	LEH0653*±4H^A	24 (610)	1/2	9.6	1119.0	10.4	20.0	5.1	1119.0	5.5	15.0	2,700.0	11.8	5.9
4	LEH0693*±4H^A	24 (610)	1/2	12.8	1492.0	13.6	20.0	6.8	1492.0	7.2	15.0	4,000.0	17.4	8.7
4	LEH0883*±4H^A	24 (610)	1/2	12.8	1492.0	13.6	20.0	6.8	1492.0	7.2	15.0	4,000.0	17.4	8.7

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

** = This model with 3-Phase drain pan heaters

† = Hot gas drain pan available

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

SPECIFICATIONS

Hot Gas Defrost - 50 Hz

FPI	Model	Fan Diameter	HP	3 Phase AC Open Drip Proof Rail Mount				Drain Pan Heaters †	
				380-400/3/50				Watts	Total Amps
		in (mm)		Amps	Watts	MCA	MOPD		
6	LEH0423*±6H^A	24 (610)	3/4	4.0	1119.0	4.5	15.0	1,430	3.8
6	LEH0513*±6H^A	24 (610)	3/4	4.0	1119.0	4.5	15.0	1,430	3.8
6	LEH0573*±6H^A	24 (610)	3/4	6.0	1678.5	6.5	15.0	1,840	4.9
6	LEH0713*±6H^A	24 (610)	3/4	6.0	1678.5	6.5	15.0	1,840	4.9
6	LEH0763*±6H^A	24 (610)	3/4	8.0	2238.0	8.5	15.0	2,730	7.2
6	LEH0963*±6H^A	24 (610)	3/4	8.0	2238.0	8.5	15.0	2,730	7.2
4	LEH0373*±4H^A	24 (610)	3/4	4.0	1119.0	4.5	15.0	1,430	3.8
4	LEH0473*±4H^A	24 (610)	3/4	4.0	1119.0	4.5	15.0	1,430	3.8
4	LEH0513*±4H^A	24 (610)	3/4	6.0	1678.5	6.5	15.0	1,840	4.9
4	LEH0653*±4H^A	24 (610)	3/4	6.0	1678.5	6.5	15.0	1,840	4.9
4	LEH0693*±4H^A	24 (610)	3/4	8.0	2238.0	8.5	15.0	2,730	7.2
4	LEH0883*±4H^A	24 (610)	3/4	8.0	2238.0	8.5	15.0	2,730	7.2
6	LEH1123*±6H^A	30 (763)	1	6.9	2237.0	7.5	15.0	2,730	7.2
6	LEH1343*±6H^A	30 (763)	1	6.9	2237.0	7.5	15.0	2,730	7.2
6	LEH1563*±6H^A	30 (763)	1-1/2	9.9	3356.0	10.7	20.0	2,730	7.2
6	LEH1823*±6H^A	30 (763)	1-1/2	10.5	3356.0	11.4	20.0	2,870	7.5
6	LEH2333*±6H^A	30 (763)	1-1/2	14.0	4474.0	14.9	25.0	4,410	11.6
4	LEH0983*±4H^A	30 (763)	1	6.9	2237.0	7.5	15.0	2,730	7.2
4	LEH1163*±4H^A	30 (763)	1	6.9	2237.0	7.5	15.0	2,730	7.2
4	LEH1343*±4H^A	30 (763)	1-1/2	9.9	3356.0	10.7	20.0	2,730	7.2
4	LEH1583*±4H^A	30 (763)	1-1/2	10.5	3356.0	11.4	20.0	2,870	7.5
4	LEH2053*±4H^A	30 (763)	1-1/2	14.0	4474.0	14.9	25.0	4,410	11.6

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

† = Hot gas drain pan available

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

SPECIFICATIONS

Hot Gas Defrost - 50 Hz

FPI	Model	Fan Diameter	HP	3 Phase AC Totally Enclosed Rail Mount				Drain Pan Heaters [†]	
				380-400/3/50				Watts	Total Amps
		in (mm)		Amps	Watts	MCA	MOPD		
6	LEH0423*±6H^A	24 (610)	1	4.6	1492.0	5.2	15.0	1,430	3.8
6	LEH0513*±6H^A	24 (610)	1	4.6	1492.0	5.2	15.0	1,430	3.8
6	LEH0573*±6H^A	24 (610)	1	6.9	2238.0	7.5	15.0	1,840	4.9
6	LEH0713*±6H^A	24 (610)	1	6.9	2238.0	7.5	15.0	1,840	4.9
6	LEH0763*±6H^A	24 (610)	1	9.2	2984.0	9.6	15.0	2,730	7.2
6	LEH0963*±6H^A	24 (610)	1	9.2	2984.0	9.6	15.0	2,730	7.2
4	LEH0373*±4H^A	24 (610)	1	4.6	1492.0	5.2	15.0	1,430	3.8
4	LEH0473*±4H^A	24 (610)	1	4.6	1492.0	5.2	15.0	1,430	3.8
4	LEH0513*±4H^A	24 (610)	1	6.9	2238.0	7.5	15.0	1,840	4.9
4	LEH0653*±4H^A	24 (610)	1	6.9	2238.0	7.5	15.0	1,840	4.9
4	LEH0693*±4H^A	24 (610)	1	9.2	2984.0	9.6	15.0	2,730	7.2
4	LEH0883*±4H^A	24 (610)	1	9.2	2984.0	9.6	15.0	2,730	7.2
6	LEH1123*±6H^A	30 (763)	1-1/2	7.8	3356.0	8.5	15.0	2,730	7.2
6	LEH1343*±6H^A	30 (763)	1-1/2	7.8	3356.0	8.5	15.0	2,730	7.2
6	LEH1563*±6H^A	30 (763)	1-1/2	7.8	3356.0	8.5	15.0	2,730	7.2
6	LEH1823*±6H^A	30 (763)	1-1/2	7.8	3356.0	8.5	15.0	2,870	7.5
6	LEH2333*±6H^A	30 (763)	1-1/2	10.4	4474.0	11.1	15.0	4,410	11.6
4	LEH0983*±4H^A	30 (763)	1-1/2	7.8	3356.0	8.5	15.0	2,730	7.2
4	LEH1163*±4H^A	30 (763)	1-1/2	7.8	3356.0	8.5	15.0	2,730	7.2
4	LEH1343*±4H^A	30 (763)	1-1/2	7.8	3356.0	8.5	15.0	2,730	7.2
4	LEH1583*±4H^A	30 (763)	1-1/2	7.8	3356.0	8.5	15.0	2,870	7.5
4	LEH2053*±4H^A	30 (763)	1-1/2	10.4	4474.0	11.1	15.0	4,410	11.6

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

** = This model with 3-Phase drain pan heaters

† = Hot gas drain pan available

± = Refrigerant designator Y or S (see Nomenclature details)

Models Not Meeting DOE Minimum AWEF

SPECIFICATIONS

Hot Gas Defrost High CFM - 60 Hz

FPI	Model	Fan Diameter	HP	High CFM Rail Mount								Drain Pan Heaters †		
				208-230/3/60				460/3/60				Watts	Total Amps	
		in (mm)		Amps	Watts	MCA	MOPD	Amps	Watts	MCA	MOPD		208-230/1/60	460/1/60
6	LEH0423*±6H^A	24 (610)	2	12.0	2984.0	13.5	30.0	6.0	2984.0	6.80	15.0	2,100.0	9.2	4.6
6	LEH0513*±6H^A	24 (610)	2	12.0	2984.0	13.5	30.0	6.0	2984.0	6.80	15.0	2,100.0	9.2	4.6
6	LEH0573*±6H^A	24 (610)	2	18.0	4476.0	19.5	35.0	9.0	4476.0	9.80	15.0	2,700.0	11.8	5.9
6	LEH0713*±6H^A	24 (610)	2	18.0	4476.0	19.5	35.0	9.0	4476.0	9.80	15.0	2,700.0	11.8	5.9
6	LEH0763*±6H^A	24 (610)	2	24.0	5968.0	25.5	40.0	12.0	5968.0	12.80	20.0	4,000.0	17.4	8.7
6	LEH0963*±6H^A	24 (610)	2	24.0	5968.0	25.5	40.0	12.0	5968.0	12.80	20.0	4,000.0	17.4	8.7
4	LEH0373*±4H^A	24 (610)	2	12.0	2984.0	13.5	30.0	6.0	2984.0	6.80	15.0	2,100.0	9.2	4.6
4	LEH0473*±4H^A	24 (610)	2	12.0	2984.0	13.5	30.0	6.0	2984.0	6.80	15.0	2,100.0	9.2	4.6
4	LEH0513*±4H^A	24 (610)	2	18.0	4476.0	19.5	35.0	9.0	4476.0	9.80	15.0	2,700.0	11.8	5.9
4	LEH0653*±4H^A	24 (610)	2	18.0	4476.0	19.5	35.0	9.0	4476.0	9.80	15.0	2,700.0	11.8	5.9
4	LEH0693*±4H^A	24 (610)	2	24.0	5968.0	25.5	40.0	12.0	5968.0	12.80	20.0	4,000.0	17.4	8.7
4	LEH0883*±4H^A	24 (610)	2	24.0	5968.0	25.5	40.0	12.0	5968.0	12.80	20.0	4,000.0	17.4	8.7
6	LEH1123*±6H^A	30 (763)	3	24.6	6711.0	26.7	45.0	12.3	6711.0	13.30	25.0	4,000.0	17.4	8.7
6	LEH1343*±6H^A	30 (763)	3	24.6	6711.0	26.7	45.0	12.3	6711.0	13.30	25.0	4,000.0	17.4	8.7
6	LEH1563*±6H^A	30 (763)	3	24.6	6711.0	26.7	45.0	12.3	6711.0	13.30	25.0	4,000.0	17.4	8.7
6	LEH1823*±6H^A	30 (763)	3	24.6	6711.0	26.7	45.0	12.3	6711.0	13.30	25.0	4,200.0	18.2	9.1
6	LEH2333*±6H^A	30 (763)	3	32.8	8948.0	34.9	55.0	16.4	8948.0	17.40	25.0	6,450.0	23.2**	14.0
4	LEH0983*±4H^A	30 (763)	3	24.6	6711.0	26.7	45.0	12.3	6711.0	13.30	25.0	4,000.0	17.4	8.7
4	LEH1163*±4H^A	30 (763)	3	24.6	6711.0	26.7	45.0	12.3	6711.0	13.30	25.0	4,000.0	17.4	8.7
4	LEH1343*±4H^A	30 (763)	3	24.6	6711.0	26.7	45.0	12.3	6711.0	13.30	25.0	4,000.0	17.4	8.7
4	LEH1583*±4H^A	30 (763)	3	24.6	6711.0	26.7	45.0	12.3	6711.0	13.30	25.0	4,200.0	18.2	9.1
4	LEH2053*±4H^A	30 (763)	3	32.8	8948.0	34.9	55.0	16.4	8948.0	17.40	25.0	6,450.0	23.2**	14.0

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

** = This model with 3-Phase drain pan heaters

† = Hot gas drain pan available

TD = Temperature Difference = (Room temperature - saturated suction temperature)

High CFM models can handle external static pressure up to 1/2" of water

High CFM models are designed for operation below 15°F SST

CFM is at 0.0 external static pressure

± = Refrigerant designator Y or S (see Nomenclature details)

PHYSICAL DATA

Air Defrost

FPI	Model	No. of Fans	Fan Diameter in (mm)	Connections (in)				Approx. Net Wt.		Approx. Ship Wt.	
				Coil Inlet ODF	Suction ODF	External Equalizer ODF	Drain FPT	lbs	kg	lbs	kg
6	LEH0553*±6A^A	2	24 (610)	1-1/8	1-5/8	1/4	1-1/4	299	136	501	227
6	LEH0570*±6A^A	2	24 (610)	1-1/8	1-5/8	1/4	1-1/4	398	181	599	272
6	LEH0700*±6A^A	2	24 (610)	1-1/8	1-5/8	1/4	1-1/4	398	181	599	272
6	LEH0723*±6A^A	2	24 (610)	1-1/8	1-5/8	1/4	1-1/4	319	145	521	236
6	LEH0743*±6A^A	3	24 (610)	1-3/8	2-1/8	1/4	1-1/4	516	234	719	326
6	LEH0755*±6A^A	2	24 (610)	1-3/8	2-1/8	1/4	1-1/4	409	186	610	277
6	LEH0933*±6A^A	3	24 (610)	1-3/8	2-1/8	1/4	1-1/4	536	243	739	335
6	LEH1053*±6A^A	4	24 (610)	1-3/8	2-1/8	1/4	1-1/4	647	293	852	386
6	LEH0900*±6A^A	3	24 (610)	1-3/8	2-1/8	1/4	1-1/4	531	241	772	350
6	LEH1080*±6A^A	3	24 (610)	1-3/8	2-1/8	1/4	1-1/4	531	241	772	350
6	LEH1245*±6A^A	3	24 (610)	1-3/8	2-1/8	1/4	1-1/4	546	248	787	357
6	LEH1313*±6A^A	4	24 (610)	1-3/8	2-1/8	1/4	1-1/4	667	303	872	396
6	LEH1445*±6A^A	4	24 (610)	1-3/8	2-1/8	1/4	1-1/4	665	302	947	430
6	LEH1655*±6A^A	4	24 (610)	1-3/8	2-1/8	1/4	1-1/4	687	312	969	440
6	LEH0620*±6AMA	1	30 (763)	1-1/8	1-5/8	1/4	1-1/4	351	159	575	261
6	LEH0730*±6AMA	1	30 (763)	1-1/8	1-5/8	1/4	1-1/4	441	200	665	302
8	LEH0840*±8AMA	1	30 (763)	1-1/8	1-5/8	1/4	1-1/4	460	209	684	310
6	LEH1250*±6AMA	2	30 (763)	1-3/8	2-1/8	1/4	1-1/4	600	272	900	408
6	LEH1333*±6A^A	3	30 (763)	1-3/8	2-1/8	1/4	1-1/4	738	335	959	435
6	LEH1470*±6AMA	2	30 (763)	1-3/8	2-1/8	1/4	1-1/4	766	347	1066	484
6	LEH1623*±6A^A	3	30 (763)	1-3/8	2-1/8	1/4	1-1/4	800	363	1040	472
6	LEH1870*±6AMA	3	30 (763)	1-3/8 (2 conn)	2-1/8 (2 conn)	1/4 (2 conn)	1-1/4	850	386	1105	501
6	LEH1873*±6A^A	3	30 (763)	1-3/8 (2 conn)	2-1/8 (2 conn)	1/4 (2 conn)	1-1/4	850	386	1105	501
6	LEH2200*±6AMA	3	30 (763)	1-3/8	2-5/8	1/4	1-1/4	1160	526	1508	684
6	LEH2203*±6A^A	3	30 (763)	1-3/8	2-5/8	1/4	1-1/4	1160	526	1508	684
6	LEH2553*±6A^A	4	30 (763)	1-3/8	2-5/8	1/4	1-1/4	1500	680	1950	885
6	LEH2883*±6A^A	4	30 (763)	1-5/8	2-5/8	1/4	1-1/4	1600	726	2080	943
8	LEH2513*±8A^A	3	30 (763)	1-3/8	2-5/8	1/4	1-1/4	1160	526	1508	684
8	LEH2953*±8A^A	4	30 (763)	1-3/8	2-5/8	1/4	1-1/4	1500	680	1950	885
8	LEH3283*±8A^A	4	30 (763)	1-3/8	2-5/8	1/4	1-1/4	1600	726	2080	943

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

PHYSICAL DATA

Electric Defrost

FPI	Model	No. of Fans	Fan Diameter in (mm)	Connections (in)				Approx. Net Wt.		Approx. Ship Wt.	
				Coil Inlet ODF	Suction ODF	External Equalizer ODF	Drain FPT	lbs	kg	lbs	kg
6	LEH0540*±6E^A	2	24 (610)	1-1/8	1-5/8	1/4	1-1/4	417	189	618	280
6	LEH0630*±6E^A	2	24 (610)	1-3/8	2-1/8	1/4	1-1/4	429	195	630	286
6	LEH0805*±6E^A	3	24 (610)	1-3/8	2-1/8	1/4	1-1/4	561	254	802	364
6	LEH0925*±6E^A	3	24 (610)	1-3/8	2-1/8	1/4	1-1/4	576	261	817	371
6	LEH1125*±6E^A	4	24 (610)	1-5/8	2-1/8	1/4	1-1/4	705	320	987	448
6	LEH1210*±6E^A	4	24 (610)	1-5/8	2-1/8	1/4	1-1/4	727	330	1009	458
6	LEH0423*±6E^A	2	24 (610)	1-1/8	1-5/8	1/4	1-1/4	409	186	616	279
6	LEH0513*±6E^A	2	24 (610)	1-1/8	1-5/8	1/4	1-1/4	429	195	626	284
6	LEH0573*±6E^A	3	24 (610)	1-3/8	2-1/8	1/4	1-1/4	546	248	755	342
6	LEH0713*±6E^A	3	24 (610)	1-3/8	2-1/8	1/4	1-1/4	566	257	775	352
6	LEH0763*±6E^A	4	24 (610)	1-3/8	2-1/8	1/4	1-1/4	687	312	898	407
6	LEH0963*±6E^A	4	24 (610)	1-3/8	2-1/8	1/4	1-1/4	707	321	918	416
4	LEH0480*±4E^A	2	24 (610)	1-1/8	1-5/8	1/4	1-1/4	419	190	620	281
4	LEH0565*±4E^A	2	24 (610)	1-3/8	2-1/8	1/4	1-1/4	431	195	632	287
4	LEH0730*±4E^A	3	24 (610)	1-3/8	2-1/8	1/4	1-1/4	567	257	808	367
4	LEH0845*±4E^A	3	24 (610)	1-3/8	2-1/8	1/4	1-1/4	579	263	820	372
4	LEH1010*±4E^A	4	24 (610)	1-5/8	2-1/8	1/4	1-1/4	718	326	1000	454
4	LEH1085*±4E^A	4	24 (610)	1-5/8	2-1/8	1/4	1-1/4	730	331	1012	459
4	LEH0373*±4E^A	2	24 (610)	1-1/8	1-5/8	1/4	1-1/4	411	186	624	283
4	LEH0473*±4E^A	2	24 (610)	1-1/8	1-5/8	1/4	1-1/4	431	195	644	292
4	LEH0513*±4E^A	3	24 (610)	1-3/8	2-1/8	1/4	1-1/4	429	195	626	284
4	LEH0653*±4E^A	3	24 (610)	1-3/8	2-1/8	1/4	1-1/4	569	258	784	356
4	LEH0693*±4E^A	4	24 (610)	1-3/8	2-1/8	1/4	1-1/4	690	313	907	411
4	LEH0883*±4E^A	4	24 (610)	1-3/8	2-1/8	1/4	1-1/4	710	322	927	420
6	LEH1123*±6E^A	3	30 (763)	1-3/8	2-1/8	1/4	1-1/4	753	342	979	444
6	LEH1340*±6EMA	3	30 (763)	1-5/8	2-1/8	1/4	1-1/4	815	370	1060	481
6	LEH1343*±6E^A	3	30 (763)	1-5/8	2-1/8	1/4	1-1/4	815	370	1060	481
6	LEH1560*±6EMA	3	30 (763)	1-3/8 (2 conn)	2-1/8 (2 conn)	1/4 (2 conn)	1-1/4	865	392	1125	510
6	LEH1563*±6E^A	3	30 (763)	1-3/8 (2 conn)	2-1/8 (2 conn)	1/4 (2 conn)	1-1/4	865	392	1125	510
6	LEH1820*±6EMA	3	30 (763)	1-3/8	2-5/8	1/4	1-1/4	1175	533	1528	693
6	LEH1823*±6E^A	3	30 (763)	1-3/8	2-5/8	1/4	1-1/4	1175	533	1528	693
6	LEH2330*±6EMA	4	30 (763)	1-5/8	2-5/8	1/4	1-1/4	1620	735	2106	955
6	LEH2333*±6E^A	4	30 (763)	1-5/8	2-5/8	1/4	1-1/4	1620	735	2106	955
4	LEH0983*±4E^A	3	30 (763)	1-3/8	2-1/8	1/4	1-1/4	744	337	967	439
4	LEH1163*±4E^A	3	30 (763)	1-5/8	2-1/8	1/4	1-1/4	805	365	1047	475
4	LEH1343*±4E^A	3	30 (763)	1-3/8 (2 conn)	2-1/8 (2 conn)	1/4 (2 conn)	1-1/4	854	387	1110	503
4	LEH1583*±4E^A	3	30 (763)	1-3/8	2-5/8	1/4	1-1/4	1160	526	1508	684
4	LEH2053*±4E^A	4	30 (763)	1-5/8	2-5/8	1/4	1-1/4	1600	726	2080	943

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

± = Refrigerant designator Y or S (see Nomenclature details)

PHYSICAL DATA

Hot Gas Defrost

FPI	Model	No. of Fans	Fan Diameter in (mm)	Connections (in)						Approx. Net Wt.		Approx. Ship Wt.	
				Coil Inlet ODF	Suction ODF	External Equalizer ODF	Drain FPT	Hot Gas Side Port	Hot Gas Drain Pain Ref. Conn. (when supplied)	lbs	kg	lbs	kg
6	LEH0540*±6H^A	2	24 (610)	1-1/8	1-5/8	1/4	1-1/4	5/8	1-1/8	433	196	634	288
6	LEH0630*±6H^A	2	24 (610)	1-3/8	2-1/8	1/4	1-1/4	5/8	1-1/8	445	202	646	293
6	LEH0805*±6H^A	3	24 (610)	1-3/8	2-1/8	1/4	1-1/4	7/8	1-1/8	583	264	824	374
6	LEH0925*±6H^A	3	24 (610)	1-3/8	2-1/8	1/4	1-1/4	7/8	1-1/8	595	270	836	379
6	LEH1125*±6H^A	4	24 (610)	1-5/8	2-1/8	1/4	1-1/4	7/8	1-1/8	732	332	1014	460
6	LEH1210*±6H^A	4	24 (610)	1-5/8	2-1/8	1/4	1-1/4	7/8	1-1/8	744	337	1026	465
6	LEH0423*±6H^A	2	24 (610)	1-1/8	1-5/8	1/4	1-1/4	5/8	1-1/8	434	197	631	286
6	LEH0513*±6H^A	2	24 (610)	1-1/8	1-5/8	1/4	1-1/4	5/8	1-1/8	454	206	651	295
6	LEH0573*±6H^A	3	24 (610)	1-3/8	2-1/8	1/4	1-1/4	7/8	1-1/8	566	257	775	352
6	LEH0713*±6H^A	3	24 (610)	1-3/8	2-1/8	1/4	1-1/4	7/8	1-1/8	586	266	795	361
6	LEH0763*±6H^A	4	24 (610)	1-3/8	2-1/8	1/4	1-1/4	7/8	1-1/8	707	321	918	416
6	LEH0963*±6H^A	4	24 (610)	1-3/8	2-1/8	1/4	1-1/4	7/8	1-1/8	727	330	938	425
4	LEH0480*±4H^A	2	24 (610)	1-1/8	1-5/8	1/4	1-1/4	5/8	1-1/8	437	198	638	289
4	LEH0565*±4H^A	2	24 (610)	1-3/8	2-1/8	1/4	1-1/4	5/8	1-1/8	449	204	650	295
4	LEH0730*±4H^A	3	24 (610)	1-3/8	2-1/8	1/4	1-1/4	7/8	1-1/8	587	266	828	376
4	LEH0845*±4H^A	3	24 (610)	1-3/8	2-1/8	1/4	1-1/4	7/8	1-1/8	599	272	840	381
4	LEH1010*±4H^A	4	24 (610)	1-5/8	2-1/8	1/4	1-1/4	7/8	1-1/8	736	334	1018	462
4	LEH1085*±4H^A	4	24 (610)	1-5/8	2-1/8	1/4	1-1/4	7/8	1-1/8	750	340	1032	468
4	LEH0373*±4H^A	2	24 (610)	1-1/8	1-5/8	1/4	1-1/4	5/8	1-1/8	438	199	651	295
4	LEH0473*±4H^A	2	24 (610)	1-1/8	1-5/8	1/4	1-1/4	5/8	1-1/8	458	208	671	304
4	LEH0513*±4H^A	3	24 (610)	1-3/8	2-1/8	1/4	1-1/4	7/8	1-1/8	454	206	651	295
4	LEH0653*±4H^A	3	24 (610)	1-3/8	2-1/8	1/4	1-1/4	7/8	1-1/8	590	268	805	365
4	LEH0693*±4H^A	4	24 (610)	1-3/8	2-1/8	1/4	1-1/4	7/8	1-1/8	711	323	928	421
4	LEH0883*±4H^A	4	24 (610)	1-3/8	2-1/8	1/4	1-1/4	7/8	1-1/8	731	332	948	430
6	LEH1123*±6H^A	3	30 (763)	1-3/8	2-1/8	1/4	1-1/4	7/8	1-3/8	753	342	979	444
6	LEH1340*±6HMA	3	30 (763)	1-5/8	2-1/8	1/4	1-1/4	1-1/8	1-3/8	815	370	1060	481
6	LEH1343*±6H^A	3	30 (763)	1-5/8	2-1/8	1/4	1-1/4	1-1/8	1-3/8	815	370	1060	481
6	LEH1560*±6HMA	3	30 (763)	1-3/8 (2 conn)	2-1/8 (2 conn)	1/4 (2 conn)	1-1/4	7/8 (2 conn)	1-3/8	865	392	1125	510
6	LEH1563*±6H^A	3	30 (763)	1-3/8 (2 conn)	2-1/8 (2 conn)	1/4 (2 conn)	1-1/4	7/8 (2 conn)	1-3/8	865	392	1125	510
6	LEH1820*±6HMA	3	30 (763)	1-3/8 (2 conn)	2-5/8 (2 conn)	1/4 (2 conn)	1-1/4	7/8 (2 conn)	1-5/8**	1175	533	1528	693
6	LEH1823*±6H^A	3	30 (763)	1-3/8 (2 conn)	2-5/8 (2 conn)	1/4 (2 conn)	1-1/4	7/8 (2 conn)	1-5/8**	1175	533	1528	693
6	LEH2330*±6HMA	4	30 (763)	1-3/8 (2 conn)	2-5/8 (2 conn)	1/4 (2 conn)	1-1/4	7/8 (2 conn)	1-5/8**	1620	735	2106	955
6	LEH2333*±6H^A	4	30 (763)	1-3/8 (2 conn)	2-5/8 (2 conn)	1/4 (2 conn)	1-1/4	7/8 (2 conn)	1-5/8**	1620	735	2106	955
4	LEH0983*±4H^A	3	30 (763)	1-3/8	2-1/8	1/4	1-1/4	7/8	1-3/8	744	337	967	439
4	LEH1163*±4H^A	3	30 (763)	1-5/8	2-1/8	1/4	1-1/4	1-1/8	1-3/8	805	365	1047	475
4	LEH1343*±4H^A	3	30 (763)	1-3/8 (2 conn)	2-1/8 (2 conn)	1/4 (2 conn)	1-1/4	7/8 (2 conn)	1-3/8	854	387	1110	503
4	LEH1583*±4H^A	3	30 (763)	1-3/8 (2 conn)	2-5/8 (2 conn)	1/4 (2 conn)	1-1/4	7/8 (2 conn)	1-5/8**	1160	526	1508	684
4	LEH2053*±4H^A	4	30 (763)	1-3/8 (2 conn)	2-5/8 (2 conn)	1/4 (2 conn)	1-1/4	7/8 (2 conn)	1-5/8**	1600	726	2080	943

Notes:

* = Electrical Code Designator (see Nomenclature details)


^ = Motor Code Designator (see Nomenclature details)

** = Opposite end connections

± = Refrigerant designator Y or S (see Nomenclature details)

DIMENSIONAL DRAWINGS

Diagram 1: 24" Fan Models

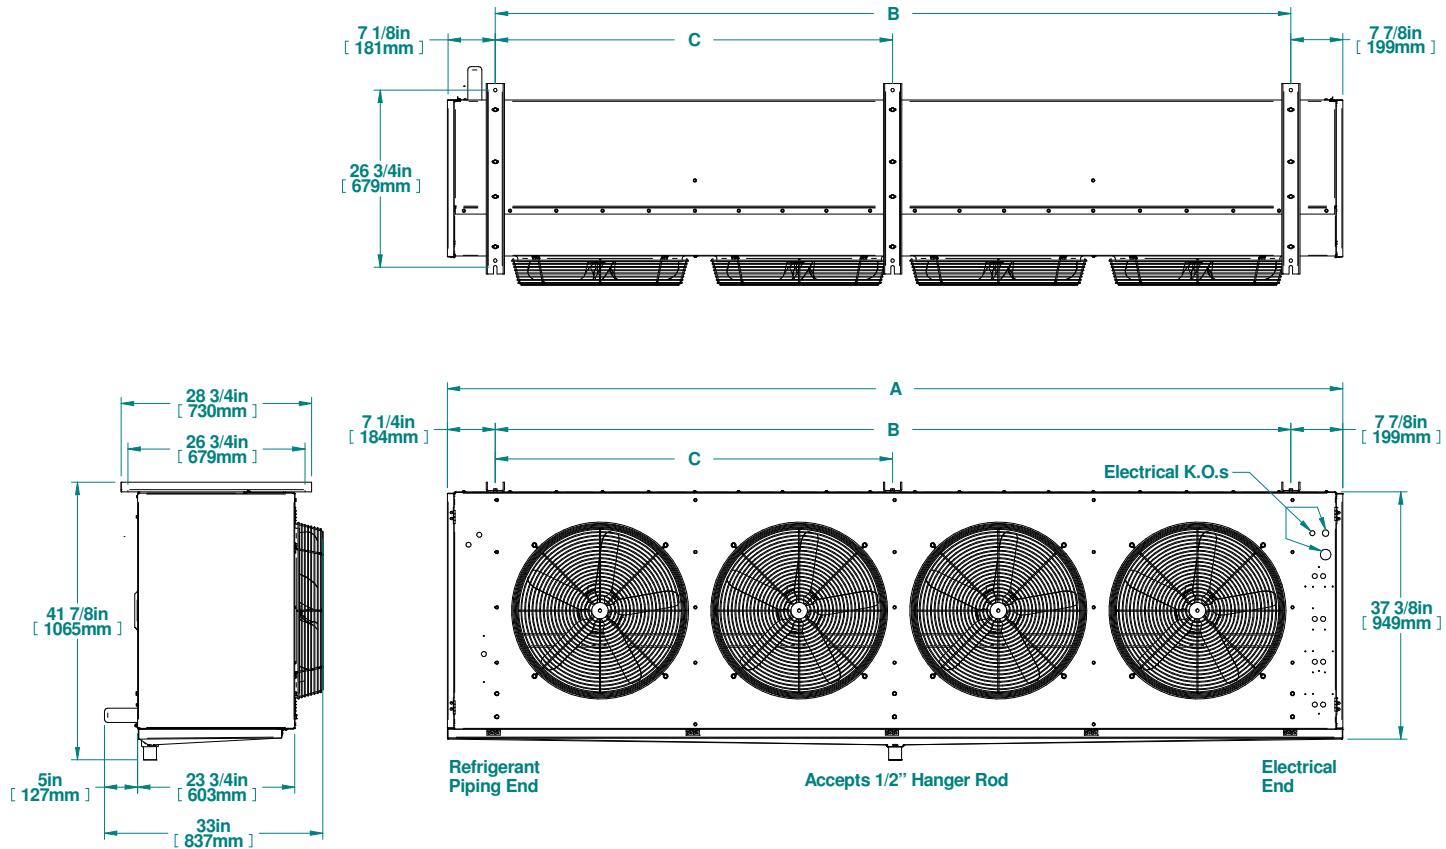


Dimensional Data For 24" Fan Models

# of Fans	A		B		C	
	in.	mm	in.	mm	in.	mm
2 fan	83-3/32	2,111	68-1/8	1,730		
3 fan	105-5/32	2,671	90-3/16	2,291	45-3/32	1,145
4 fan	135-7/32	3,435	120-1/4	3,054	60-1/8	1,527

DIMENSIONAL DRAWINGS

Diagram 2: 30" Fan Models

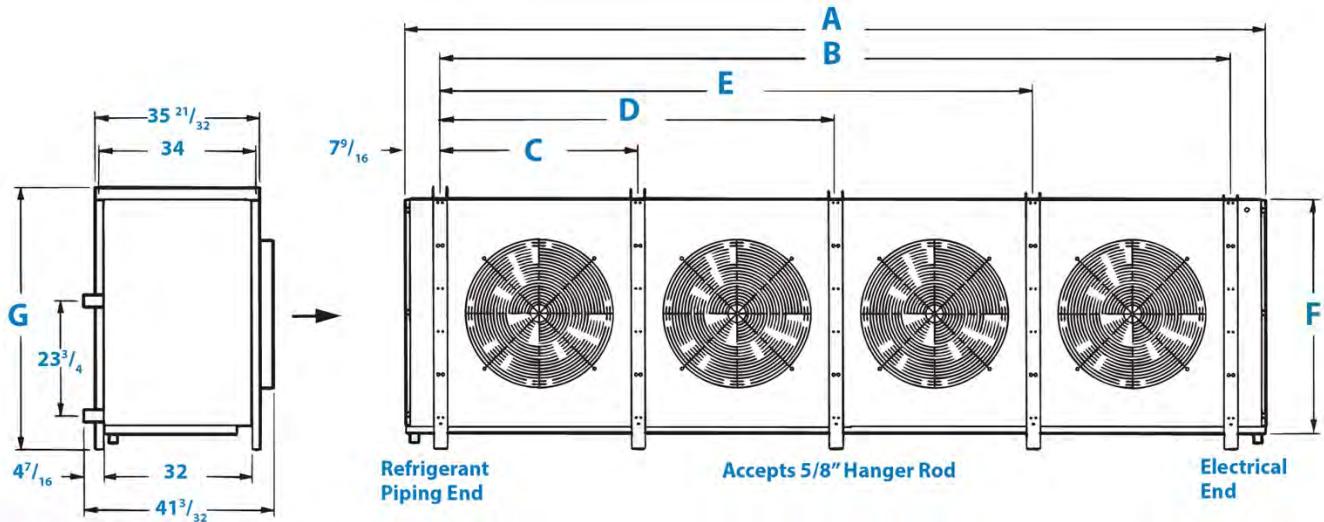

Dimensional Data For 30" Fan Models

Air Defrost		Electric & Hot Gas		Dimensions													
6FPI	8FPI	6FPI	4FPI	A		B		C		D		E		F		G	
				in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
0620				55-3/8	1,407	-	-	40-1/8	1,019	-	-	-	-	50-7/32	1,276	55-13/16	1,418
0730				57-7/8	1,470	-	-	42-5/8	1,083	-	-	-	-	50-7/32	1,276	55-13/16	1,418
	0840			57-7/8	1,470	-	-	42-5/8	1,083	-	-	-	-	50-7/32	1,276	55-13/16	1,418
1250				95-1/2	2,426	-	-	40-1/8	1,019	80-1/4	2,038	-	-	50-7/32	1,276	55-13/16	1,418
1,333	-	1123	0983	135-13/32	3,439	120-9/32	3,055	40-3/32	1,018	80-3/16	2,037	-	-	44-1/2	1130	50-5/16	1,278
1470				100-1/2	2,553	-	-	42-5/8	1,083	85-1/4	2,165	-	-	50-7/32	1,276	55-13/16	1,418
1623	-	1340, 1343	1163	135-13/32	3,439	120-9/32	3,055	40-3/32	1,018	80-3/16	2,037	-	-	44-1/2	1130	50-5/16	1,278
1870, 1873	-	1560, 1563	1343	135-13/32	3,439	120-9/32	3,055	40-3/32	1,018	80-3/16	2,037	-	-	50-7/32	1276	55-13/16	1,418
2200, 2203	2513	1820, 1823	1583	142-1/2	3,620	127-25/32	3,246	42-19/32	1,082	85-3/16	2,164	-	-	50-7/32	1276	55-13/16	1,418
2553	2953	-	-	185-1/2	4,712	170-3/8	4,328	42-19/32	1,082	85-3/16	2,164	127-25/32	3,246	44-1/2	1130	50-5/16	1,278
2883	3283	2330, 2333	2053	185-1/2	4,712	170-3/8	4,328	42-19/32	1,082	85-3/16	2,164	127-25/32	3,246	50-7/32	1276	56-1/4	1,429

Electric & Hot Gas Defrost Models Air Throw

Electric & Hot Gas		Std Motor RPM	Std HP	Air Throw	Air Throw w/Collar	Options High CFM	Optional HP	Air Throw	Air Throw w/Collar
6FPI	4FPI								
0540-1210	0480-1085	850	3/4	65	80	N/A	N/A	N/A	N/A
0423-0963	0373-0883	850	1/2*	70	85	1,750	2	80	100
1123-1563	0983-1343	850	1 & 1-1/2	100	120	1,750	3	115	145
1820-2333	1583-2053	1,140	37,257	120	145	1,750	3	130	150

Notes:

* = 3-Phase Motors are 1140 RPM

Air throw data based on 30 ft. ceiling height with no obstructions where velocity drops to 50 fpm

DOE Rated AWEF

AWEF DATA

Air Defrost

Rating Conditions/ DOE mandated, test conditions per AHRI 1250

Testing conditions: COOLER: 10°F TD, 25°F SST, <50% RH/ FREEZER: 10°F TD, -20°F SST, <50% RH_t

FPI	Model	Fan Diameter	Cooler						
			R-404A/ R-507A	R-448A/ R-449A	R-407A/ R-407F	R-407C	R-455A	R-454C	R-454A
		in (mm)	AWEF	AWEF	AWEF	AWEF	AWEF	AWEF	AWEF
6	LEH0570*±6AMA	24 (610)	-	9.00	9.00	9.00	9.00	-	9.00
6	LEH0700*±6AMA	24 (610)	-	9.00	9.00	9.00	9.00	-	9.00
6	LEH0755*±6AMA	24 (610)	-	9.00	9.00	9.00	9.00	-	9.00
6	LEH0900*±6AMA	24 (610)	-	9.00	9.00	9.00	9.00	-	9.00
6	LEH1080*±6AMA	24 (610)	-	9.00	9.00	9.00	9.00	-	9.00
6	LEH1245*±6AMA	24 (610)	-	9.00	9.00	9.00	9.00	-	9.00
6	LEH1445*±6AMA	24 (610)	-	9.00	9.00	9.00	9.00	-	9.00
6	LEH1655*±6AMA	24 (610)	-	9.00	9.00	9.00	9.00	-	9.00
6	LEH0620*±6AMA	30 (763)	9.00	9.00	9.00	9.00	9.00	9.00	9.00
6	LEH0730*±6AMA	30 (763)	9.00	9.00	9.00	9.00	9.00	9.00	9.00
8	LEH0840*±8AMA	30 (763)	9.00	9.00	9.00	9.00	9.00	9.00	9.00
6	LEH1250*±6AMA	30 (763)	9.00	9.00	9.00	9.00	9.00	9.00	9.00
6	LEH1470*±6AMA	30 (763)	9.00	9.00	9.00	9.00	9.00	9.00	9.00
6	LEH1870*±6AMA	30 (763)	9.00	9.00	9.00	9.00	9.00	9.00	9.00
6	LEH2200*±6AMA	30 (763)	9.00	9.00	9.00	9.00	9.00	9.00	9.00

Notes:

*= Electrical Code Designator (see Nomenclature details)

2-speed EC motor is required to meet minimum AWEF.

For R-404A, 30 inch fan models use 700 RPM 2-speed EC motor to meet minimum AWEF.

± = Refrigerant designator Y or S (see Nomenclature details)

DOE Rated AWEF

AWEF DATA

Electric Defrost - Medium Temperature

Rating Conditions/ DOE mandated, test conditions per AHRI 1250

Testing conditions: COOLER: 10°F TD, 25°F SST, <50% RH/ FREEZER: 10°F TD, -20°F SST, <50% RH

FPI	Model	Fan Diameter	Cooler						
			R-404A/ R-507A	R-448A/ R-449A	R-407A/ R-407F	R-407C	R-455A	R-454C	R-454A
			in (mm)	AWEF	AWEF	AWEF	AWEF	AWEF	AWEF
6	LEH0540*±6EMA	24 (610)	-	-	-	-	-	-	-
6	LEH0630*±6EMA	24 (610)	-	9.00	9.00	-	9.00	-	9.00
6	LEH0805*±6EMA	24 (610)	-	-	-	-	-	-	-
6	LEH0925*±6EMA	24 (610)	-	9.00	9.00	-	9.00	-	9.00
6	LEH1125*±6EMA	24 (610)	-	-	-	-	-	-	-
6	LEH1210*±6EMA	24 (610)	-	9.00	9.00	-	9.00	-	9.00
4	LEH0480*±4EMA	24 (610)	-	-	-	-	-	-	-
4	LEH0565*±4EMA	24 (610)	-	-	-	-	-	-	-
4	LEH0730*±4EMA	24 (610)	-	-	-	-	-	-	-
4	LEH0845*±4EMA	24 (610)	-	9.00	9.00	-	9.00	-	9.00
4	LEH1010*±4EMA	24 (610)	-	-	-	-	-	-	-
4	LEH1085*±4EMA	24 (610)	-	-	-	-	-	-	-

Notes:

* = Electrical Code Designator (see Nomenclature details)

2-speed EC motor is required to meet minimum AWEF.

For R-404A, 30 inch fan models use 700 RPM 2-speed EC motor to meet minimum AWEF.

± = Refrigerant designator Y or S (see Nomenclature details)

DOE Rated AWEF

AWEF DATA

Electric Defrost - Low Temperature

Rating Conditions/ DOE mandated, test conditions per AHRI 1250

Testing conditions: COOLER: 10°F TD, 25°F SST, <50% RH/ FREEZER: 10°F TD, -20°F SST, <50% RH_t

FPI	Model	Fan Diameter	Cooler						
			R-404A/ R-507A	R-448A/ R-449A	R-407A/ R-407F	R-407C	R-455A	R-454C	R-454A
		in (mm)	AWEF	AWEF	AWEF	AWEF	AWEF	AWEF	AWEF
6	LEH0540*±6EMA	24 (610)	-	4.15	4.15	-	4.15	-	4.15
6	LEH0630*±6EMA	24 (610)	4.15	4.15	4.15	-	4.15	4.15	4.15
6	LEH0805*±6EMA	24 (610)	4.15	4.15	4.15	-	4.15	4.15	4.15
6	LEH0925*±6EMA	24 (610)	4.15	4.15	4.15	-	4.15	4.15	4.15
6	LEH1125*±6EMA	24 (610)	4.15	4.15	4.15	-	4.15	4.15	4.15
6	LEH1210*±6EMA	24 (610)	4.15	4.15	4.15	-	4.15	4.15	4.15
4	LEH0480*±4EMA	24 (610)	-	4.15	4.15	-	4.15	-	4.15
4	LEH0565*±4EMA	24 (610)	-	4.15	4.15	-	4.15	-	4.15
4	LEH0730*±4EMA	24 (610)	-	4.15	4.15	-	4.15	-	4.15
4	LEH0845*±4EMA	24 (610)	-	4.15	4.15	-	4.15	-	4.15
4	LEH1010*±4EMA	24 (610)	-	4.15	4.15	-	4.15	-	4.15
4	LEH1085*±4EMA	24 (610)	-	4.15	4.15	-	4.15	-	4.15
6	LEH1340*±6EMA	30 (763)	4.15	4.15	4.15	-	4.15	4.15	4.15
6	LEH1560*±6EMA	30 (763)	4.15	4.15	4.15	-	4.15	4.15	4.15
6	LEH1820*±6EMA	30 (763)	4.15	4.15	4.15	-	4.15	4.15	4.15
6	LEH2330*±6EMA	30 (763)	4.15	4.15	4.15	-	4.15	4.15	4.15

Notes:

* = Electrical Code Designator (see Nomenclature details)

2-speed EC motor is required to meet minimum AWEF.

For R-404A, 30 inch fan models use 700 RPM 2-speed EC motor to meet minimum AWEF.

± = Refrigerant designator Y or S (see Nomenclature details)

DOE Rated AWEF

AWEF DATA

Hot Gas Defrost - Medium Temperature

Rating Conditions/ DOE mandated, test conditions per AHRI 1250

Testing conditions: COOLER: 10°F TD, 25°F SST, <50% RH/ FREEZER: 10°F TD, -20°F SST, <50% RH_t

FPI	Model	Fan Diameter	Cooler						
			R-404A/ R-507A	R-448A/ R-449A	R-407A/ R-407F	R-407C	R-455A	R-454C	R-454A
			in (mm)	AWEF	AWEF	AWEF	AWEF	AWEF	AWEF
6	LEH0540*±6HMA	24 (610)	-	-	-	-	-	-	-
6	LEH0630*±6HMA	24 (610)	-	9.00	9.00	-	9.00	-	9.00
6	LEH0805*±6HMA	24 (610)	-	-	-	-	-	-	-
6	LEH0925*±6HMA	24 (610)	-	9.00	9.00	-	9.00	-	9.00
6	LEH1125*±6HMA	24 (610)	-	-	-	-	-	-	-
6	LEH1210*±6HMA	24 (610)	-	9.00	9.00	-	9.00	-	9.00
4	LEH0480*±4HMA	24 (610)	-	-	-	-	-	-	-
4	LEH0565*±4HMA	24 (610)	-	-	-	-	-	-	-
4	LEH0730*±4HMA	24 (610)	-	-	-	-	-	-	-
4	LEH0845*±4HMA	24 (610)	-	9.00	9.00	-	9.00	-	9.00
4	LEH1010*±4HMA	24 (610)	-	-	-	-	-	-	-
4	LEH1085*±4HMA	24 (610)	-	-	-	-	-	-	-

Notes:

* = Electrical Code Designator (see Nomenclature details)

2-speed EC motor is required to meet minimum AWEF.

For R-404A, 30 inch fan models use 700 RPM 2-speed EC motor to meet minimum AWEF.

± = Refrigerant designator Y or S (see Nomenclature details)

DOE Rated AWEF

AWEF DATA

Hot Gas Defrost - Low Temperature

Rating Conditions/ DOE mandated, test conditions per AHRI 1250

Testing conditions: COOLER: 10°F TD, 25°F SST, <50% RH/ FREEZER: 10°F TD, -20°F SST, <50% RH

FPI	Model	Fan Diameter	Cooler						
			R-404A/ R-507A	R-448A/ R-449A	R-407A/ R-407F	R-407C	R-455A	R-454C	R-454A
		in (mm)	AWEF	AWEF	AWEF	AWEF	AWEF	AWEF	AWEF
6	LEH0540*±6HMA	24 (610)	-	4.15	4.15	-	4.15	-	4.15
6	LEH0630*±6HMA	24 (610)	4.15	4.15	4.15	-	4.15	4.15	4.15
6	LEH0805*±6HMA	24 (610)	4.15	4.15	4.15	-	4.15	4.15	4.15
6	LEH0925*±6HMA	24 (610)	4.15	4.15	4.15	-	4.15	4.15	4.15
6	LEH1125*±6HMA	24 (610)	4.15	4.15	4.15	-	4.15	4.15	4.15
6	LEH1210*±6HMA	24 (610)	4.15	4.15	4.15	-	4.15	4.15	4.15
4	LEH0480*±4HMA	24 (610)	-	4.15	4.15	-	4.15	-	4.15
4	LEH0565*±4HMA	24 (610)	-	4.15	4.15	-	4.15	-	4.15
4	LEH0730*±4HMA	24 (610)	-	4.15	4.15	-	4.15	-	4.15
4	LEH0845*±4HMA	24 (610)	-	4.15	4.15	-	4.15	-	4.15
4	LEH1010*±4HMA	24 (610)	-	4.15	4.15	-	4.15	-	4.15
4	LEH1085*±4HMA	24 (610)	-	4.15	4.15	-	4.15	-	4.15
6	LEH1340*±6HMA	30 (763)	4.15	4.15	4.15	-	4.15	4.15	4.15
6	LEH1560*±6HMA	30 (763)	4.15	4.15	4.15	-	4.15	4.15	4.15
6	LEH1820*±6HMA	30 (763)	4.15	4.15	4.15	-	4.15	4.15	4.15
6	LEH2330*±6HMA	30 (763)	4.15	4.15	4.15	-	4.15	4.15	4.15

Notes:

*= Electrical Code Designator (see Nomenclature details)

2-speed EC motor is required to meet minimum AWEF.

For R-404A, 30 inch fan models use 700 RPM 2-speed EC motor to meet minimum AWEF.

± = Refrigerant designator Y or S (see Nomenclature details)

STANDARD NOZZLE SELECTION

Meet AWEF Models

FPI	Model	Fan Diameter	No. of Fans	Distributor Tube (in.)		No. of Circuits	Nozzle Selections						
		in (mm)		OD	Length		R-448A/ R-449A	R-407A/ R-407F	R-407C	R-404A	R-455A	R-454C	R-454A
6 FPI Air Defrost	LEH0570*±6AMA	24 (610)	2	3/16	25 1/2	14	E-6	E-4	E-4	-	E-4	--	E-3
	LEH0700*±6AMA	24 (610)	2	3/16	25 1/2	14	E-6	E-4	E-4	-	E-5	--	E-4
	LEH0755*±6AMA	24 (610)	2	3/16	25 1/2	21	C-6	C-5	C-5	-	C-5	--	C-4
	LEH0900*±6AMA	24 (610)	3	3/16	25 1/2	23	C-10	C-6	C-6	-	C-6	--	C-5
	LEH1080*±6AMA	24 (610)	3	3/16	25 1/2	23	C-10	C-6	C-6	-	C-8	--	C-6
	LEH1245*±6AMA	24 (610)	3	3/16	25 1/2	28	C-12	C-8	C-8	-	C-10	--	C-6
	LEH1445*±6AMA	24 (610)	4	3/16	25 1/2	23	C-12	C-10	C-8	-	C-10	--	C-10
	LEH1655*±6AMA	24 (610)	4	3/16	25 1/2	28	C-15	C-12	C-10	-	C-12	--	C-10
	LEH0620*±6AMA	30 (763)	1	3/16	28	15	E-5	E-3	E-3	E-3	E-4	E-3	E-4
	LEH0730*±6AMA	30 (763)	1	1-1/4	32	8	E-6	E-4	E-4	E-4	E-5	E-4	E-4
	LEH0840*±8AMA**	30 (763)	1	1-1/4	32	8	E-8	E-5	E-5	E-4	E-6	E-4	E-5
6 FPI Electric Defrost	LEH1250*±6AMA	30 (763)	2	3/16	28	19	C-12	C-8	C-8	C-6	C-8	C-6	C-6
	LEH1470*±6AMA	30 (763)	2	1-1/4	32	16	C-15	C-10	C-10	C-8	C-12	C-10	C-10
	LEH1870*±6AMA	30 (763)	3	3/16	21-1/2	19 X 2	2 X C-8	2 X C-5	2 X C-5	2 X C-5	2 X C-6	2 X C-5	2 X C-5
	LEH2200*±6AMA	30 (763)	3	1/4	32	24	C-20	C-15	C-15	C-12	C-20	C-15	C-17
	LEH0540*±6EMA	24 (610)	2	3/16	25 1/2	17	E-8	E-5	-	-	E-5	--	E-5
	LEH0630*±6EMA	24 (610)	2	3/16	25 1/2	21	C-12	C-6	-	C-6	C-6	C-6	C-6
	LEH0805*±6EMA	24 (610)	3	3/16	25 1/2	23	C-15	C-8	-	C-10	C-10	C-8	C-8
	LEH0925*±6EMA	24 (610)	3	3/16	25 1/2	28	C-15	C-12	-	C-10	C-12	C-10	C-10
	LEH1125*±6EMA	24 (610)	4	3/16	25 1/2	35	A-20	A-12	-	A-12	A-15	A-12	A-12
	LEH1210*±6EMA	24 (610)	4	3/16	25 1/2	40	A-20	A-15	-	A-15	A-15	A-15	A-12
4 FPI Electric Defrost	LEH1340*±6EMA	30 (763)	3	3/16	28	34	A-20	A-15	A-15	A-15	A-15	A-15	A-15
	LEH1560*±6EMA	30 (763)	3	3/16	21-1/2	19 X 2	2 X C-12	2 X C-8	2 X C-8	2 X C-8	2 X C-8	2 X C-8	2 X C-8
	LEH1820*±6EMA	30 (763)	3	1/4	32	24	C-25	C-25	C-25	C-20	C-25	C-20	C-20
	LEH2330*±6EMA	30 (763)	4	1/4	32	32	A-35	A-30	A-30	A-30	A-30	A-30	A-25
	LEH0480*±4EMA	24 (610)	2	3/16	25 1/2	17	E-8	E-5	-	-	E-5	--	E-5
	LEH0565*±4EMA	24 (610)	2	3/16	25 1/2	21	C-10	C-6	-	-	C-6	--	C-5

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

** = Model 0840 has 8 FPI.

Contact Application Engineering for guidance if:

- Liquid temperature is not 90-100°F
- Evaporator TD is not 10°-15°F (room temperature – saturated suction temperature)
- Electric defrost and hot gas models with a saturated suction temperature of 10°F or higher

± = Refrigerant designator Y or S (see Nomenclature details)

CAUTION: Refrigeration system will not perform properly without Correct Nozzle!

STANDARD NOZZLE SELECTION

Meet AWEF Models (cont.)

FPI	Model	Fan Diameter	No. of Fans	Distributor Tube (in.)		No. of Circuits	Nozzle Selections						
		in (mm)		OD	Length		R-448A/ R-449A	R-407A/ R-407F	R-407C	R-404A	R-455A	R-454C	R-454A
6 FPI Hot Gas Defrost	LEH0540*±6HMA	24 (610)	2	3/16	25 1/2	17	E-10	E-6	-	-	E-6	--	E-5
	LEH0630*±6HMA	24 (610)	2	3/16	25 1/2	21	C-12	C-8	-	C-6	C-8	C-6	C-6
	LEH0805*±6HMA	24 (610)	3	3/16	25 1/2	23	C-15	C-10	-	C-10	C-10	C-8	C-8
	LEH0925*±6HMA	24 (610)	3	3/16	25 1/2	28	C-17	C-12	-	C-12	C-12	C-12	C-12
	LEH1125*±6HMA	24 (610)	4	3/16	25 1/2	35	A-20	A-15	-	A-15	A-15	A-15	A-12
	LEH1210*±6HMA	24 (610)	4	3/16	25 1/2	40	A-25	A-15	-	A-15	A-15	A-15	A-15
	LEH1340*±6HMA	30 (763)	3	3/16	28	34	A-25	A-15	A-15	A-15	A-17	A-15	A-15
	LEH1560*±6HMA	30 (763)	3	3/16	21 1/2	19 X 2	2 X C-15	2 X C-10	2 X C-10	2 X C-8	2 X C-10	2 X C-8	2 X C-8
	LEH1820*±6HMA	30 (763)	3	1/4	24	16 X 2	2 X C-17	2 X C-12	2 X C-12	2 X C-12	2 X C-15	2 X C-12	2 X C-12
4 FPI Hot Gas Defrost	LEH2330*±6HMA	30 (763)	4	1/4	24	16 X 2	2 X C-25	2 X C-15	2 X C-15	2 X C-15	2 X C-15	2 X C-15	2 X C-15
	LEH0480*±4HMA	24 (610)	2	3/16	25 1/2	17	E-8	E-5	-	-	E-6	--	E-5
	LEH0565*±4HMA	24 (610)	2	3/16	25 1/2	21	C-12	C-6	-	-	C-8	--	C-6
	LEH0730*±4HMA	24 (610)	3	3/16	25 1/2	23	C-15	C-8	-	-	C-10	--	C-8
	LEH0845*±4HMA	24 (610)	3	3/16	25 1/2	28	C-15	C-12	-	-	C-12	--	C-10
	LEH1010*±4HMA	24 (610)	4	3/16	25 1/2	35	A-20	A-12	-	-	A-15	--	A-12
	LEH1085*±4HMA	24 (610)	4	3/16	25 1/2	40	A-20	A-15	-	-	A-15	--	A-12

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

** = Model 0840 has 8 FPI.

Contact Application Engineering for guidance if:

- Liquid temperature is not 90-100°F
- Evaporator TD is not 10°-15°F (room temperature – saturated suction temperature)
- Electric defrost and hot gas models with a saturated suction temperature of 10°F or higher

± = Refrigerant designator Y or S (see Nomenclature details)

CAUTION: Refrigeration system will not perform properly without Correct Nozzle!

STANDARD NOZZLE SELECTION

Not Meeting AWEF Models

FPI	Model	Fan Diameter	No. of Fans	Distributor Tube (in.)		No. of Circuits	Nozzle Selections						
		in (mm)		OD	Length		R-404A/ R-507A	R-407A/ R-407F/ R-407C	R-448A/ R-449A	R-22	R-455A	R-454C	R-454A
6 FPI Air Defrost	LEH0553*±6A^A	24 (610)	2	3/16	25 1/2	14	E-4	E-3	E-5	E-2-1/2	E - 4	E - 3	E - 3
	LEH0723*±6A^A	24 (610)	2	3/16	25 1/2	14	E-4	E-4	E-6	E-3	E - 5	E - 4	E - 4
	LEH0743*±6A^A	24 (610)	3	3/16	25 1/2	21	C-5	C-5	C-8	C-4	C - 6	C - 5	C - 5
	LEH0933*±6A^A	24 (610)	3	3/16	25 1/2	28	C-6	C-6	C-10	C-4	C - 8	C - 5	C - 5
	LEH1053*±6A^A	24 (610)	4	3/16	25 1/2	21	C-6	C-6	C-10	C-4	C - 8	C - 5	C - 6
	LEH1313*±6A^A	24 (610)	4	3/16	25 1/2	28	C-8	C-8	C-12	C-5	C - 10	C-8	C-8
	LEH1333*±6A^A	30 (763)	3	3/16	28	25	C-8	C-8	C-12	C-5	C-10	C-8	C-8
	LEH1623*±6A^A	30 (763)	3	3/16	28	34	A-10	A-12	A-15	A-6	A-12	A-10	A-10
	LEH1873*±6A^A	30 (763)	3	3/16	21 1/2	19 X 2	2 X C-5	2 X C-5	2 X C-8	2 X C-4	2 X C-6	2 X C-5	2 X C-5
	LEH2203*±6A^A	30 (763)	3	1/4	32	24	C-15	C-15	C-20	C-12	C-20	C-15	C-17
	LEH2553*±6A^A	30 (763)	4	1/4	32	21	C-17	C-17	C-25	C-15	C-20	C-17	C-17
	LEH2883*±6A^A	30 (763)	4	1/4	32	32	A-20	A-20	A-30	C-15	A-25	A-20	A-20
8 FPI Air Defrost	LEH2513*±8A^A	30 (763)	3	1/4	32	19	C-17	C-17	C-25	C-12	C-20	C-17	C-15
	LEH2953*±8A^A	30 (763)	4	1/4	32	21	C-20	C-20	C-25	C-15	C-25	C-17	C-20
	LEH3283*±8A^A	30 (763)	4	1/4	32	24	C-20	C-20	C-25	C-15	C-25	C-20	C-20
	LEH0423*±6E^A	24 (610)	2	3/16	25 1/2	14	E-5	E-5	E-8	E-3	E-5	E-4	E-4
	LEH0513*±6E^A	24 (610)	2	3/16	25 1/2	14	E-6	E-6	E-10	E-4	E-6	E-5	E-5
	LEH0573*±6E^A	24 (610)	3	3/16	25 1/2	21	C-8	C-8	C-12	C-5	C-8	C-6	C-6
	LEH0713*±6E^A	24 (610)	3	3/16	25 1/2	28	C-10	C-10	C-15	C-6	C-10	C-10	C-8
	LEH0763*±6E^A	24 (610)	4	3/16	25 1/2	21	C-12	C-10	C-15	C-8	C-10	C-10	C-8
	LEH0963*±6E^A	24 (610)	4	3/16	25 1/2	28	C-12	C-12	C-17	C-8	C-12	C-12	C-12
	LEH1123*±6E^A	30 (763)	3	3/16	28	25	C-12	C-12	C-17	C-8	C-12	C-12	C-12
	LEH1343*±6E^A	30 (763)	3	3/16	28	34	A-17	A-15	A-20	A-10	A-15	A-15	A-15
	LEH1563*±6E^A	30 (763)	3	3/16	21 1/2	19 X 2	2 X C-10	2 X C-8	2 X C-12	2 X C-5	2 X C-8	2 X C-8	2 X C-8
	LEH1823*±6E^A	30 (763)	3	1/4	32	24	C-20	C-25	C-25	C-15	C-25	C-20	C-20
	LEH2333*±6E^A	30 (763)	4	1/4	32	32	A-30	A-30	A-35	A-20	A-30	A-30	A-25
6 FPI Electric Defrost	LEH0373*±4E^A	24 (610)	2	3/16	25 1/2	14	E-5	E-4	E-6	E-3	E-4	E-4	E-4
	LEH0473*±4E^A	24 (610)	2	3/16	25 1/2	14	E-6	E-5	E-8	E-4	E-5	E-5	E-5
	LEH0513*±4E^A	24 (610)	3	3/16	25 1/2	21	C-8	C-6	C-10	C-5	C - 6	C-6	C-5
	LEH0653*±4E^A	24 (610)	3	3/16	25 1/2	28	C-10	C-8	C-12	C-6	C-8	C-8	C-6
	LEH0693*±4E^A	24 (610)	4	3/16	25 1/2	21	C-10	C-8	C-12	C-8	C-10	C-8	C-8
	LEH0883*±4E^A	24 (610)	4	3/16	25 1/2	28	C-12	C-12	C-15	C-8	C-12	C-10	C-10
	LEH0983*±4E^A	30 (763)	3	3/16	28	25	C-12	C-12	C-15	C-8	C-12	C-10	C-10
	LEH1163*±4E^A	30 (763)	3	3/16	28	34	A-15	A-15	A-20	A-10	A-15	A-12	A-12
	LEH1343*±4E^A	30 (763)	3	3/16	21 1/2	19 X 2	2 X C-8	2 X C-6	2 X C-12	2 X C-5	2 X C-8	2 X C-6	2 X C-6
	LEH1583*±4E^A	30 (763)	3	1/4	32	24	C-20	C-20	C-25	C-15	C-20	C-20	C-17
	LEH2053*±4E^A	30 (763)	4	1/4	32	32	A-30	A-25	A-35	A-20	A-25	A-25	A-25

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

Nozzles sized for 90-100°F liquid temperature at expansion valve.

Contact Application Engineering for guidance if:

- Liquid temperature is not 90-100°F
- Evaporator TD is not 10°-15°F (room temperature – saturated suction temperature)
- Electric defrost and hot gas models with a saturated suction temperature of 10°F or higher
- * R-22 nozzle is not included with evaporator. It is for reference only

± = Refrigerant designator Y or S (see Nomenclature details)

CAUTION: Refrigeration system will not perform properly without Correct Nozzle!

STANDARD NOZZLE SELECTION

Not Meeting AWEF Models (cont.)

FPI	Model	Fan Diameter	No. of Fans	Distributor Tube (in.)		No. of Circuits	Nozzle Selections						
		in (mm)		OD	Length		R-404A/ R-507A	R-407A/ R-407F/ R-407C	R-448A/ R-449A	R-22	R-455A	R-454C	R-454A
6 FPI Hot Gas Defrost	LEH0423*±6H^A	24 (610)	2	3/16	25 1/2	14	E-5	E-5	E-8	E-3	E-5	E-5	E-5
	LEH0513*±6H^A	24 (610)	2	3/16	25 1/2	14	E-6	E-6	E-10	E-4	E-6	E-6	E-6
	LEH0573*±6H^A	24 (610)	3	3/16	25 1/2	21	C-8	C-8	C-12	C-4	C-8	C-8	C-8
	LEH0713*±6H^A	24 (610)	3	3/16	25 1/2	28	C-10	C-10	C-15	C-5	C-12	C-10	C-10
	LEH0763*±6H^A	24 (610)	4	3/16	25 1/2	21	C-12	C-10	C-15	C-5	C-12	C-10	C-10
	LEH0963*±6H^A	24 (610)	4	3/16	25 1/2	28	C-12	C-12	C-17	C-6	C-15	C-12	C-12
	LEH1123*±6H^A	30 (763)	3	3/16	28	25	C-15	C-12	C-20	C-6	C-15	C-12	C-12
	LEH1343*±6H^A	30 (763)	3	3/16	28	34	A-17	A-15	A-25	A-8	A-17	A-15	A-15
	LEH1563*±6H^A	30 (763)	3	3/16	21 1/2	19 X 2	2 X C-10	2 X C-10	2 X C-15	2 X C-4	2 X C-10	2 X C-8	2 X C-8
	LEH1823*±6H^A	30 (763)	3	1/4	24	16 X 2	2 X C-12	2 X C-12	2 X C-17	2 X C-12	2 X C-15	2 X C-12	2 X C-12
	LEH2333*±6H^A	30 (763)	4	1/4	24	16 X 2	2 X C-15	2 X C-15	2 X C-25	2 X C-15	2 X C-15	2 X C-15	2 X C-15
4 FPI Hot Gas Defrost	LEH0373*±4H^A	24 (610)	2	3/16	25 1/2	14	E-5	E-4	E-6	E-3	E-5	E-4	E-4
	LEH0473*±4H^A	24 (610)	2	3/16	25 1/2	14	E-6	E-5	E-8	E-4	E-6	E-5	E-5
	LEH0513*±4H^A	24 (610)	3	3/16	25 1/2	21	C-8	C-6	C-10	C-4	C-8	C-6	C-6
	LEH0653*±4H^A	24 (610)	3	3/16	25 1/2	28	C-10	C-8	C-12	C-5	C-10	C-8	C-8
	LEH0693*±4H^A	24 (610)	4	3/16	25 1/2	21	C-10	C-8	C-12	C-5	C-10	C-8	C-8
	LEH0883*±4H^A	24 (610)	4	3/16	25 1/2	28	C-12	C-12	C-15	C-6	C-12	C-12	C-12
	LEH0983*±4H^A	30 (763)	3	3/16	28	25	C-12	C-12	C-17	C-6	C-12	C-12	C-12
	LEH1163*±4H^A	30 (763)	3	3/16	28	34	A-15	A-15	A-20	A-8	A-15	A-15	A-15
	LEH1343*±4H^A	30 (763)	3	3/16	21 1/2	19 X 2	2 X C-8	2 X C-8	2 X C-12	2 X C-4	2 X C-8	2 X C-8	2 X C-8
	LEH1583*±4H^A	30 (763)	3	1/4	24	16 X 2	2 X C-12	2 X C-12	2 X C-15	2 X C-12	2 X C-12	2 X C-10	2 X C-10
	LEH2053*±4H^A	30 (763)	4	1/4	24	16 X 2	2 X C-15	2 X C-15	2 X C-20	2 X C-15	2 X C-15	2 X C-12	2 X C-12

Notes:

* = Electrical Code Designator (see Nomenclature details)

^ = Motor Code Designator (see Nomenclature details)

Nozzles sized for 90-100°F liquid temperature at expansion valve.

Contact Application Engineering for guidance if:

- Liquid temperature is not 90-100°F
- Evaporator TD is not 10°-15°F (room temperature – saturated suction temperature)
- Electric defrost and hot gas models with a saturated suction temperature of 10°F or higher

* R-22 nozzle is not included with evaporator. It is for reference only

± = Refrigerant designator Y or S (see Nomenclature details)

CAUTION: Refrigeration system will not perform properly without Correct Nozzle!



Right source. Right parts. Right now.

InterLink™ is your link to a complete line of dependable and certified commercial refrigeration parts, accessories and innovative electronic controls for all Bohn equipment. At InterLink, we provide our wholesalers with a comprehensive selection of product solutions and innovative technologies for the installed customer base. And every product is built to ensure the same high performance standards with which all Heatcraft Refrigeration Products (HRP) brands are built — backed by a dedicated team to serve every customer need, delivering at the best lead times in the industry.

Dependable. Versatile. Courteous.

Finally, one simple source for all your replacement needs from a name you can trust. For parts, please contact (800) 686-7278 or visit www.heatcraftrpd.com.

REPLACEMENT PARTS

Motor/Fan Blade/Fan Guards

Part #	Description	
25305701S	Motor 208-230V/1PH PSC	1/2 HP 850 RPM
25305801S	Motor 460V/1PH PSC	1/2 HP 850 RPM
7072102S	Motor 208-230/460V/3PH	3/4 HP 1140 RPM
25316301S	Motor 208-230/460V/3PH	1 HP 850 RPM
25316601S	Motor 208-230/460V/3PH	1-1/2 HP 850 RPM
25316401S	Motor 208-230/460V/3PH	1-1/2 HP 1140 RPM
25307901S	Motor 575V/3PH	1/2 HP 1140 RPM
25316801S	Motor 575V/3PH	1-1/2 HP 850 RPM
25316701S	Motor 575V/3PH	1-1/2 HP 1140 RPM
25301001S	Motor 208-230/460V/3PH	1 HP 1140 RPM TE
25391101S	Motor 208-230/460V/3PH	1-1/2 HP 1140 RPM TE INVERTER DUTY
5916F	Motor 208-230/460V/3PH	2 HP 1750 RPM
5926J	Motor 208-230/460V/3PH	3 HP 1750 RPM
25308901	Motor 208-230/460V/3PH	1 HP 1140 RPM TE (LT)
22901101	Fan Blade 24"	850 RPM
5133C	Fan Blade 24"	1140 RPM
22901201	Fan Blade 24"	1750 RPM Cast Aluminum
22900101	Fan Blade 30"	1140 RPM
22900301	Fan Blade 30"	850 RPM
22900401	Fan Blade 30"	850 RPM
22901401	Fan Blade 30"	1750 RPM Cast Aluminum
22901501	Fan Blade 30"	1140 RPM
23102203	Fan Guard 24"	Beige
23102303	Fan Guard 30"	Beige
Motor For Models Meeting Minimum AWEF		
25328201	Motor Fan 2 Speed, 230 V	3/4 HP, 850RPM, 3PH
25328301	Motor Fan 2 Speed, 460 V	3/4 HP, 850RPM, 3PH
25329601	Motor, 2 Speed EC, 230 V	1.5 HP, 700RPM, 3PH
25329701	Motor, 2 Speed EC, 460 V	1.5 HP, 700RPM, 3PH
25328401	Motor, 2 Speed EC, 230 V	1.5 HP, 850RPM, 3PH
25328501	Motor, 2 Speed EC, 460 V	1.5 HP, 850RPM, 3PH

REPLACEMENT PARTS

Coil Defrost Heaters

Part #	Unit Voltage	Model	Wire Lead Color Code
24711201	Heater 230V 1300W	208-230V & 460V	0373, 0423, 0473, 0513 Black
24711202	Heater 230V 1700W	208-230V & 460V	0513, 0573, 0653, 0713 Black
24711203	Heater 230V 2300W	208-230V & 460V	0693, 0763, 0883, 0963, 0983, 1123, 1163, 1343, 1563 Black
24711801	Heater 288V 1300W	575V	0373, 0423, 0473, 0513 Black, Red
24711802	Heater 288V 1700W	575V	0513, 0573, 0653, 0713 Black, Red
24711803	Heater 288V 2300W	575V	0693, 0763, 0883, 0963, 0983, 1123, 1163, 1343, 1563 Black, Red
23308101	Heater Clip	-	0373-1563 -
24712301	Heater 230V 2100W	208-230V & 460V	1583, 1823 Black
24712401	Heater 230V 3100W	208-230V & 460V	2053, 2333 Black
24712402	Heater 288V 2100W	575V	1583, 1823 Black, Red
24712403	Heater 288V 3100W	575V	2053, 2333 Red
23307101	Heater Clip	-	1583-2333 -

Cabinet Sheet Metal

Air Defrost Model	Electric & Hot Gas Defrost Model	Drain Pan*	Side Panel	Left Back Panel (Refrig. conn)
0553, 0570, 0723, 0700, 0755	0373, 0423, 0473, 0513, 0540, 0630, 0480, 0565	40475305	41074101	40834701
0743, 0900, 0933, 1080, 1245	0513, 0573, 0653, 0713, 0805, 0925, 0730, 0845	40475405	41074101	40834701
1053, 1313, 1445, 1655	0693, 0763, 0883, 0963, 1125, 1210, 1010, 1085	40475505	41074101	40834701
1333, 1623	0983, 1123, 1163, 1343	40402103	40868201	40868101
1870, 1873	1343, 1563	40402103	40846501	40846401
2200, 2203, 2513	1583, 1823	40410403	40858401	40858601
2553, 2953	-	40410703	40858201	40858501
2883, 3283	2053, 2333	40410703	40858401	40858601
0620		40484501	40846501	40846401
0730, 0840		40484701	40846501	40846401
1250		40484601	40846501	40846401
1470		40484801	40846501	40846401

Notes:

* Includes provision to mount drain pan heater

Miscellaneous Components

Part #	Description
2891040	Room Thermostat
4267-W	Defrost Termination and Fan Delay Thermostat Adjustable Type
5893-Q	Defrost Termination Thermostat Adjustable Type
4752-C	Heater Limit Thermostat

Notes:

Contact factory for hot gas defrost components not listed

REPLACEMENT PARTS

Drain Pan Heaters

Part #	Description	Unit Voltage	Model	Wire Lead Color Code
24711301	Heater 230V 1050W	208-230V & 460V	0373, 0423, 0473, 0513	Black
24711302	Heater 230V 1350W	208-230V & 460V	0513, 0573, 0653, 0713	Black
24710305	Heater 230V 2000W	208-230V & 460V	0693, 0763, 0883, 0963, 0983, 1123, 1163, 1343, 1563	Black
24710306	Heater 230V 2100W	208-230V & 460V	1583, 1823	Black
24712501	Heater 230V 3100W	208-230V & 460V	2053, 2333	Black
24703501	Heater 230V 250W	208-230V	2053, 2333	Black
24703513	Heater 460V 250W	460V	2053, 2333	Red
24711901	Heater 288V 1050W	575V	0373, 0423, 0473, 0513	Black, Red
24711902	Heater 288V 1350W	575V	0513, 0573, 0653, 0713	Black, Red
24711105	Heater 575V 2000W	575V	0693, 0763, 0883, 0963, 0983, 1123, 1163, 1343, 1563	Black, Red
24711106	Heater 575V 2100W	575V	1583, 1823	Black, Red
24712502	Heater 288V 3100W	575V	2053, 2333	Red
24703519	Heater 575V 250W	575V	2053, 2333	Black, Red

A2L Refrigerant Detection System

Part #	Description
A2L Refrigerant Detection System (RDS) Kit	
90049901	ASSY-A2L RDS FIELD INSTALL, LC
A2L Refrigerant Sensor Harness Kit	
90050001	ASSY-A2L RDS FIELD INSL SENSOR2 HRN 165in, 1F & 2F STD
90050002	ASSY-A2L RDS FIELD INSL SENSOR2 HRN 215in, 3F & 4F STD
Field Installed Safety Shutoff Valve	
90050205	ASSY-A2L SOLENOID SHUT-OFF VLV 5/8 LIQ-1 SSOV10S150
90050206	ASSY-A2L SOLENOID SHUT-OFF VLV 5/8 LIQ-2 SSOV19S250
90050207	ASSY-A2L SOLENOID SHUT-OFF VLV 7/8 LIQ SSOV19S270
90050208	ASSY-A2L SOLENOID SHUT-OFF VLV 1-1/8 LIQ SSOV19S290
Field installed Safety Check valve	
90050306	ASSY-A2L CHECK VALVE 1-5/8 SUC
90050307	ASSY-A2L CHECK VALVE 2-1/8 SUC
90050308	ASSY-A2L CHECK VALVE 2-5/8 SUC
A2L Leak Detection Sensor (Replacement part)	
28915901S	ASSY-LP, A2L LEAK SENSOR KIT
A2L Mitigation Controller (Replacement part)	
28928001S	ASSY-LP, A2L RDS CONTROL BOARD KIT
Control Power Transformer	
22529601	TRANSFORMER, 120V-24V 40 VA
22529602	TRANSFORMER, 208/240V-24V 40 VA



2175 West Park Place Blvd.
Stone Mountain, GA 30087
Phone: 800.537.7775 · Fax: 770.465.5900

heatcraftrpd.com

Since product improvement is a continuing effort, we reserve the right to make changes in specifications without notice.

LK-LUC-0325 | Version 006

©2025 Heatcraft Refrigeration Products LLC