

Replaces BN-RITB, Nov. 2013

REACH-IN UNIT COOLERS

Technical Guide

Models TA • TL • C • VA • BBM • BBL • KMK • RAMK • BTO • U





TABLE OF CONTENTS

Model TA Thin Profile Air Defrost	3
Model TL Thin Profile Electric Defrost	4
Model C High Profile	5
Model VA Vee-Aire	6
Models BBM/BBL Back Bar	7
Model KMK Kompact Mullion	8
Model RAMK Reverse Air Flow Kompact Mullion	9
Model BTO Twin Flow	10
Model U Dual Aire Standard Coil	11

In order to ensure our products function reliably even in corrosive environments, Bohn offers coated coil options on many of our Reach-In products. These coatings provide superior protection in most common refrigeration environments. If you have a question about a specific application, please contact your Bohn representative.




MODEL TA

Thin Profile Air Defrost Reach-In Unit Cooler

Features

- · Textured aluminum cabinet
- · Molded polycarbonate guards and fans
- Drain fitting mounted at 45-degree angle so drain can be run through back or bottom of refrigerator
- Expansion valve can be mounted inside the cabinet
- · Stainless steel screws
- Motors are thermally protected and permanently lubricated
- · Convenient, moisture proof motor plug
- · Compact design! Does a big job in a small space
- Optional coated coil available (Model TAK) for enhanced protection in corrosive environments
- · Internal junction box for electrical connection
- · All models are UL listed for the US and Canada
- UL classified to NSF standards
- Sweat inlet connection standard to reduce leaks (flare connection available as a ship loose option)

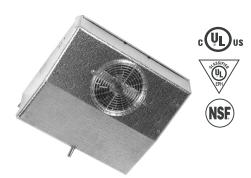

Application

Model TA is a thin profile unit which mounts in the top of a refrigerator and makes the entire top shelf area usable. The attractive low silhouette makes the unit particularly desirable for display type refrigerators. It can also be used in back bars, under counter cabinets, or wherever space is at a premium.

For 35° to 45°F fixtures at 10° to 15° TD applications with 16 hours maximum compressor run time per day.

Nomenclature


TA	K	17	В	G
Model	Coil Option	Model Size	Electrical Code	Vintage
Thin Profile	Blank = Standard	10-55	A = 115/1/60	
Air Defrost	K = Coated		B = 208-230/ 1/60	

Performance & Electrical Data

	втин			Motor Data		Conne		Approx.	
Model	10°F TD	CFM	Qty.	115/1/60 Total FLA	208-230/1/60 Total FLA	Coil Inlet OD	Suction ID	Drain OD	Ship Wt. (lbs.)
TA(K)10	1,000	120	1	0.8	0.4	3/8	3/8	1/2	14
TA(K)13	1,300	170	2	1.6	0.8	3/8	3/8	1/2	17
TA(K)17	1,700	210	2	1.6	0.8	3/8	3/8	1/2	21
TA(K)23	2,300	330	3	2.4	1.2	3/8	3/8	1/2	28
TA(K)30	3,000	360	3	2.4	1.2	3/8	1/2	1/2	33
TA(K)43*	4,300	540	4	3.2	1.6	1/2	5/8	1/2	44
TA(K)55*	5,500	650	5	4.0	2.0	1/2	5/8	1/2	53

^{*}Models 43 and 55 require an external equalized expansion valve

Model		Dimensions (in.)													
Model	Α	В	C	D	E	F	Н	J	K	L	M	W			
TA(K)10	14-5/8	14	15/16	13-1/2	10-1/2	11-3/8	4-1/2	8-7/8	2-1/2	15/16	4-3/8	16-1/2			
TA(K)13	18-5/8	14	15/16	13-1/2	10-1/8	10-1/4	4-1/2	8-3/8	9-1/2	15/16	4-3/8	20-1/2			
TA(K)17	22-1/8	15	15/16	14-1/2	11-1/8	12	4-1/2	9-3/8	11-1/4	15/16	4-3/8	24			
TA(K)23	29-3/4	15	15/16	14-1/2	13	20-7/8	4-1/2	10-3/4	10-1/4	15/16	4-3/8	31-5/8			
TA(K)30	38-1/8	15	15/16	14-1/2	13	29-3/4	4-1/2	10-3/4	9-3/4	15/16	4-3/8	40			
TA(K)43	51-1/2	15	15/16	14-1/2	13	48-3/4	4-1/2	10-3/4	13-1/4	15/16	4-3/8	53-3/8			
TA(K)55	51-1/2	15	15/16	14-1/2	13	49	6-3/4	10-3/4	11	15/16	4-3/8	53-3/8			

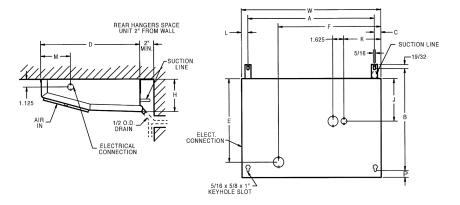



Model TL

Thin Profile Electric Defrost Reach-In Unit Cooler

Features

- Electric defrost ensures positive heat source
- Built-in fan delay allows coil to be chilled before returning to the normal cooling cycle
- Defrost terminates on coil temperature eliminating excessive defrost period
- Textured aluminum cabinet
- Molded polycarbonate guard
- Knockouts provided on sides for electrical connections - opening in rear for coil connections
- Expansion valve can be mounted inside the cabinet
- Stainless steel screws
- Motors are thermally protected and permanently lubricated
- Internal junction box for electrical connection
- Plate type aluminum fins with full collars on expanded copper tubes
- · Coils are dehydrated and sealed
- · Easy to install and maintain
- · All models UL listed for the US and Canada
- UL classified to NSF standards
- Sweat inlet connection to reduce leaks (flare connection available as a ship loose option)



Application

Model TL low temperature unit cooler has a defrost system. standard. Mounted in the top of a refrigerator, its extremely compact cabinet makes it possible to utilize the entire top shelf area for storage. Having a normal operating range of 15°F to-20°F, this unit is ideally suited for such applications as commercial freezers, ice cream boxes and bakery freezers.

Nomenclature


TL	12	В	G
Model	Size	Electrical Code	Vintage
Thin Profile	09-53	A = 115/1/60	
Electric Defrost		B = 208-230/1/6	

Performance & Electrical Data

	BTUH 1	10°FTD			Moto	or Da	ta			Heater	Data	Conne	Approx.										
Model	20°F SST	-10°F SST	CFM	Qty.		1/60 I FLA	208-230/1/60 Total FLA										Watts	_	208-230/1/60	Coil Inlet OD	Suction ID		
	331	331			SP	EC	SP	EC		Amps	Amps	UD	עו	UD	(ibs.)								
TL09	1,050	900	110	1	0.8	-	0.4	-	475	4.1	2.1	3/8	3/8	1/2	14								
TL12	1,380	1,200	210	2	1.6	-	0.8	-	600	5.2	2.6	3/8	1/2	1/2	19								
TL16	1,780	1,600	210	2	1.6	-	0.8	-	700	6.1	3.0	3/8	1/2	1/2	23								
TL21^	2,400	2,100	240	1	1.0	0.4	0.5	0.2	1,100	9.6	4.8	3/8	1/2	1/2	24								
TL28	3,200	2,800	335	3	-	-	1.2	-	1,430	-	5.7	3/8	1/2	1/2	27								
TL35^*	4,000	3,500	420	2	-	-	1.0	0.4	1,600	-	7.0	1/2	5/8	1/2	38								
TL53^*	6,100	5,300	595	3	-	-	1.5	0.6	1,950	-	8.5	1/2	7/8	1/2	53								

[^] Model available with EC motors

, 5	nysical & sinicipional satu														
Model		Dimensions (in.)													
Model	Α	В	C	D	E	F	Н	J	K	L	M	N	Р	W	
TL09	14-5/8	14	15/16	13-1/2	10-1/2	11-3/8	4-1/2	8-7/8	2-1/2	15/16	4-3/8	-	1	16-1/2	
TL12	18-5/8	14	15/16	13-1/2	10-1/8	10-1/4	4-1/2	8-3/8	9-1/2	15/16	4-3/8	-	1	20-1/2	
TL16	22-1/8	15	15/16	14-1/2	11-1/8	12	4-1/2	9-3/8	11-1/4	15/16	4-3/8	-	1	24	
TL21	22-1/8	16-1/2	15/16	16-1/2	14-1/2	18-7/8	6-3/4	11-7/8	17-1/4	15/16	4-3/8	-	1-1/2	24	
TL28	29-3/4	15	15/16	14-1/2	13	20-3/4	6-3/4	9-3/4	9-7/8	15/16	4-3/8	-	1	31-5/8	
TL35	35-3/4	16-1/2	15/16	16-1/2	14-1/2	33-1/4	6-3/4	11-5/8	18-3/8	15/16	6	5-1/8	1-1/2	38-3/8	
TL53	46-1/2	16-1/2	1-1/8	16-1/2	14-1/2	44	6-3/4	11-5/8	30-3/8	1-1/2	6	5-1/8	1-1/2	49-1/8	

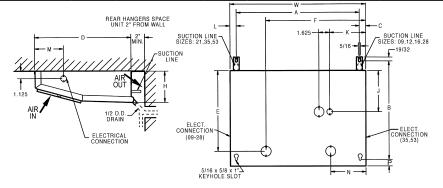

^{*} Models 35 and 53 require an external equalized expansion valve



MODEL C High Profile Reach-In Unit Cooler

Features

- · Textured aluminum cabinet
- · Molded polycarbonate guard
- Drain fitting at 45-degree angle so drain can be run through bottom or back of refrigerator
- Aluminum hangers automatically space the unit to the correct distance from the back wall
- Stainless steel screws prevent rust streaks
- · Room for expansion valve inside the unit
- Knockouts in sides and top plus openings in rear provide maximum flexibility for electrical connection
- Expansion valve can be mounted inside the cabinet
- Full collar aluminum fins on expanded copper tubes
- Internal junction box with pigtail leads for electrical connection
- Motors are thermally protected and permanently lubricated
- · All models UL listed for US and Canada
- · UL classified to NSF standards
- Optional coated coil available (Model CK) for enhanced protection in corrosive environments
- Sweat inlet connection standard to reduce leaks (flare connection available as a ship loose option)







Application

Model C is the ideal unit for refrigerated reach-ins. It mounts to the top of the refrigerator and discharges cold air against the back wall. With this air flow pattern, the air is not blasted on the product but is diffused along the back wall and then gently drawn across the product as it returns to the unit. Thus uniform temperatures are maintained throughout the refrigerator. In addition, door sweating and refrigeration loss due to door opening is greatly reduced because the air is not discharged against the doors.

Nomenclature


C	K	43	В	G
Model	Coil Option	Model Size	Electrical Code	Vintage
High Profile	Blank =	13-43	A = 115/1/60	
Unit Cooler	Standard		B = 208-230/	
	K = Coated		1/60	

Performance & Electrical Data

				Moto	or Data			Conne	ctions (in.)		Аррион
Model	BTUH 10°F TD	CFM	Qty.		1/60 I FLA	Total FLA		Coil Inlet	Suction	Drain OD	Approx. Ship Wt. (lbs.)
				SP	EC	SP	EC	OD	שו	OD	(IDS.)
C(K)13^	1,300	235	1	1.0	0.4	0.5	0.2	3/8	3/8	1/2	16
C(K)17^	1,700	250	1	1.0	0.4	0.5	0.2	3/8	1/2	1/2	17
C(K)23^	2,300	265	1	1.0	0.4	0.5	0.2	3/8	1/2	1/2	22
C(K)30^	3,000	480	2	2.0	0.8	1.0	0.4	3/8	1/2	1/2	27
C(K)43^*	4,300	520	2	2.0	0.8	1.0	0.4	1/2	1/2	1/2	40

[^] Model available with EC motors

No del		Dimensions (in.)									
Model	Α	В	C	D	W						
C(K)13	12-5/8	12-3/8	11-7/16	1-3/8	14-1/4						
C(K)17	15-5/8	12-3/8	14-7/16	1-3/8	17-1/4						
C(K)23	21-1/8	12-3/8	21-1/16	7/8	22-3/4						
C(K)30	26-1/8	12-3/8	25-13/16	1	27-3/4						
C(K)43	36-5/16	-	-	_	38						

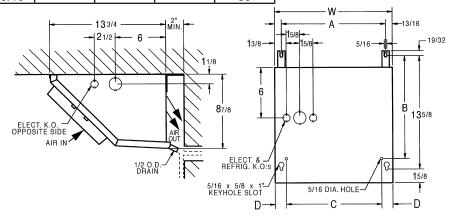

^{*} Model 43 requires an external equalized expansion valve



MODEL VA Vee-Aire Reach-In Unit Cooler

Features

- · Textured aluminum cabinet
- · Molded polycarbonate fan guard
- Improved drain pan overlaps coil surface to catch all condensate
- Stainless steel screws prevent rust streaks
- Plate-type aluminum fins with full collars on expanded copper tubes
- Expansion valve can be mounted inside the cabinet
- Internal junction box for electrical connection
- Pigtail leads in junction box
- Motors are thermally protected and permanently lubricated
- · Top quality throughout in a compact size
- · All models UL listed for US and Canada
- · UL classified to NSF standards
- Optional coated coil available (Model VAK) for enhanced protection in corrosive environments
- Sweat inlet connection standard to reduce leaks (flare connection available as a ship loose option)





Application

Model VA is a deluxe unit designed for use in small reach-ins, back bar and under counter refrigerators, and many other applications where a small, compact unit is required. The thermal expansion valve mounts inside the unit. The unit can be mounted from the ceiling or off the back wall or end walls.

Nomenclature


VA	K	08	Α	G
Model	Coil Option	Model Size	Electrical Code	Vintage
V Profile Unit	Blank =	06-17	A = 115/1/60	
Cooler	Standard		B = 208-230/1/60	
	K = Coated			

Performance & Electrical Data

				Moto	or Data		Conne	Connections (in.)					
Model	BTUH 10°F TD			CFM	Qty.		1/60 I FLA		0/1/60 I FLA	Coil Inlet	Suction	Drain OD	Approx. Ship Wt. (lbs.)
		SP EC SP	EC	OD	שו	UD	(IDS.)						
VA(K)06	600	135	1	0.8	-	0.4	-	3/8	3/8	1/2	9		
VA(K)08	800	130	1	0.8	-	0.4	-	3/8	3/8	1/2	9		
VA(K)12	1,200	265	2	1.6	-	0.8	-	3/8	3/8	1/2	14		
VA(K)17^	1,700	245	1	1.0	0.4	0.5	0.2	3/8	3/8	1/2	11		

[^] Model available with EC motors

Model		Dimensions (in.)												
Model	Α	В	C	D E		F	Н	J	K	W				
VA(K)06	4-5/16	13-1/4	4-5/16	-	-	3-3/8	6-7/8	5-1/4	8-1/8	12-1/2				
VA(K)08	4-5/16	13-1/4	4-5/16	-	-	3-3/8	6-7/8	5-1/4	8-1/8	12-1/4				
VA(K)12	4-1/2	18-3/4	5-5/16	-	-	3-3/8	8	4-7/8	8-1/8	18				
VA(K)17	5-1/4	14-3/4	5-1/4	9	2-1/2	4	9-3/4	6-13/16	10-1/2	14				





MODELS BBM/BBL Back Bar Reach-In Unit Cooler

Features

- · Molded polycarbonate fan guards
- Coils have copper tubes with aluminum fins, mechanicallybonded for efficient heat transfer. The coils are dehydrated and sealed
- Textured aluminum cabinet
- Knockouts are conveniently located for refrigerant lines
- · Screws are hardened, stainless steel
- Expansion valve can be mounted inside the cabinet and connections are sweat-type
- Motors are thermally protected and permanently lubricated
- Master units include the basic unit plus factory mounted R-404a expansion valve, solenoid, and temperature control. Also right-hand piping extended 8" - 12" outside the housing, sealed and pressurized to 20 - 30 PSI. A 1/4" OD liquid feed to slave is included
- Slave units include the basic unit plus factory mounted expansion valve with left-hand piping extended 8" - 12" outside the housing, sealed and pressurized to 20 - 30 PSI
- Sweat inlet connection to reduce leaks (flare connection available as a ship loose option)









Application

Models BB are compact, wall-mounted units whose low height makes them ideal for undercounter reach-in or drawer-type fixtures. The unit draws air in at the bottom and discharges out the front. An optional air deflector is included and can be mounted over the center of the fan to direct air up and out. The deflector can be field-formed to direct the air where needed, usually onto drop-in trays of condiments in salad bar or sandwich preparation fixtures. An S-type mounting angle is included to position the unit 3/4" off the wall which gives optimum air circulation and performance.

The BBM (medium temperature) model is designed for 35° to $40^{\circ}F$ fixture temperature with off-cycle defrost. The unit is designed to operate at 10° to 17° TD and 16 hours per day compressor run time.

The BBL (low temperature) model is designed for 0° to -10°F fixture temperature, and has automatic electric defrost. The unit is designed to operate at 8° to 15° TD with 18 hours per day compressor runtime. The BBL has an incoloy sheath heater embedded in the bottom fin surface for efficient and fast defrosting. A drain pan heater is included to ensure complete condensate drainage. A disc-type sealed defrost termination/fan delay control is mounted and wired. Field connectors are located at the terminal board.

Nomenclature

ВВ	L	S	10	Α	G
Model	Unit Temp.	Unit Type	Size	Electrical Code	Vintage
Back	L = Low	Blank = Standard	10-16	A = 115/1/60	
Bar Unit	M = Medium	S = Slave		B = 208-230/1/60	
Cooler		M = Master			


Performance & Electrical Data


	BTUH			N	lotor Data	Defrost Heaters			
Model	10°F TD	CFM	Qty.	НР	115/1/60 Total FLA	208-230/1/60 Total FLA	Watts	115/1/60 Amps	208-230/1/60 Amps
BBL10	1,000	90	1	1/150	0.8	0.4	275	2.7	1.4
BBM11	1,100	90	1	1/150	0.8	0.4	-	-	-
BBL15	1,500	180	2	1/150	1.6	0.8	350	3.5	1.7
BBM16	1,600	180	2	1/150	1.6	0.8	-	-	-


Physical & Dimensional Data

Model			Dim	ensions ((in.)			Approx.
Model	A B		B C D		E	F	W	Ship Wt. (lbs.)
BBL10	19-1/8	18	17-1/2	7-1/16	-	16-5/8	19-3/4	17
BBM11	19-1/8	18	17-1/2	7-1/16	-	16-5/8	19-3/4	16
BBL15	25-5/8	24-1/2	24	4-13/16	8-5/8	23-1/8	26-1/4	20
BBM16	25-5/8	24-1/2	24	4-13/16	8-5/8	23-1/8	26-1/4	19

 $\textbf{NOTES:} \ All \ units \ have \ 3/8'' \ OD \ suction, \ 1/2'' \ OD \ sweat \ inlet \ and \ 1/2'' \ OD \ drain$

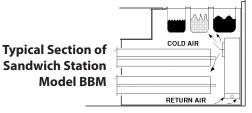

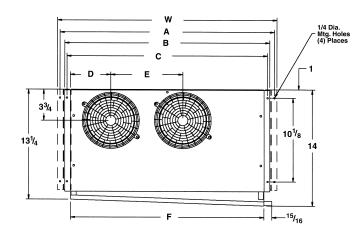





MODEL KMK

Kompact Mullion Reach-In Unit Cooler

Features

- · Light grained aluminum cabinets
- · Powder coated wire fan guard
- · Stainless steel hardware
- Coils have full collar aluminum fins on expanded copper tubes
- Coated coil for enhanced protection in corrosive environments
- Refrigerant connection knockouts provided on both ends of unit
- · Expansion valve can be mounted inside the cabinet
- Motors are thermally protected and permanently lubricated
- Internal junction box for electrical connection
- Adjustable air deflector included provides different air patterns. Air can be directed where it's needed
- · All models UL listed for the US and Canada
- UL classified to NSF standards
- Sweat inlet connection to reduce leaks (flare connection available as a ship loose option)





Application

Model KMK is ideal for under-counter reach-in refrigerators. The thin line design allows the unit to be mounted behind the mullion with sufficient clearance for tray slides. A down flow fan arrangement is used with air drawn in at the top and discharged at the bottom. This design provides superior air circulation and ensures uniform temperature throughout the cabinet.

This versatile design is also adaptable for mounting on the back wall or ends of a cooler. The method of air circulation ensures minimum box temperature rise when the cabinet doors are open. Ideal for bottle goods and beverage coolers.


Nomenclature

KM	K	13	A	G
Model	Coil	Size	Electrical Code	Vintage
Kompact	K = Coated	13-23	A = 115/1/60	
Mullion			B = 208-230/1/60	

Performance & Electrical Data

ı		BTUH			Motor Dat	ta	Conn	Approx.		
	Model	10°F TD	CFM		115/1/60 Total FLA	208-230/1/60 Total FLA	Coil Inlet OD	Suction ID	Drain OD	Ship Wt. (lbs.)
Ì	KMK13	1,300	180	2	1.6	0.8	3/8	3/8	5/8	19
Ì	KMK17	1,700	170	2	1.6	0.8	3/8	3/8	5/8	20
ĺ	KMK23	2,300	255	3	2.4	1.2	3/8	1/2	5/8	28

Model		Dimensions (in.)											
Model	Н	L	M	W	X	Υ	Z						
KMK13	17-3/4	16-7/8	9	15-5/8	2-3/4	5-1/2	6-15/16						
KMK17	19-3/4	16-7/8	10	15-5/8	2-3/4	6-1/2	7-15/16						
KMK23	19-3/4	23-1/4	10	22	2-5/16	6-1/2	7-15/16						

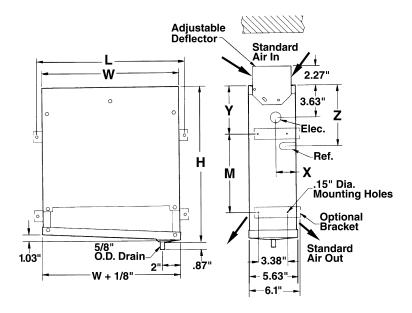



MODEL RAMK

Reverse Air Flow Kompact Mullion Reach-In Unit Cooler

Features

- · Textured aluminum cabinet
- · Powder coated wire fan guard
- · Stainless steel hardware
- Coils have full collar aluminum fins on expanded copper tubes
- Coated coil for enhanced protection in corrosive environments
- Refrigerant connection knockouts provided on both ends of unit
- · Expansion valve can be mounted inside the cabinet
- Motors are thermally protected and permanently lubricated
- · Internal junction box for electrical connection
- Adjustable air deflector included provides different air patterns. Air can be directed where it's needed
- · All models are UL listed for the US and Canada
- UL classified to NSF standards
- Sweat inlet connection standard to reduce leaks (flare connection available as a ship loose option)



Application

Model RAMK is ideal for under-counter reach-in refrigerators, under-counter drawer type refrigerators and salad bars. The unit is suitable for mounting behind a mullion or on a wall. An up flow air pattern is used with air drawn in at the bottom and discharged out the top. This provides optimum temperature for drop in trays on salad bars or prep tables. It also keeps drawer stored product in premium condition.

An adjustable and detachable air deflector/splash protector is included. The deflector can be adjusted to direct the air up and out at a 45-degree angle. This feature provides excellent air distribution over drop in trays or containers. Food in the trays and containers stays colder, lasts longer, and retains the desired appearance. The deflector can be adjusted to distribute air out both sides when used as a mullion unit.


Nomenclature

RAM	K	13	Α	G
Model	Coil	Size	Electrical Code	Vintage
Reverse	K = Coated	13-23	A = 115/1/60	
Air Flow			B = 208-230/1/60	
Kompact				
Mullion				

Performance & Electrical Data

	BTUH			Motor Da	ta	Conn	Approx.		
Model	10°F	CEM	N/I / 143/		208-230/1/60	Coil Inlet	Suction	Drain	Ship Wt.
	TD	Civi	Qty.	Total FLA	Total FLA	OD	ID	OD	(lbs.)
RAMK13	1,300	180	2	1.6	0.8	3/8	3/8	5/8	19
RAMK17	1,700	170	2	1.6	0.8	3/8	3/8	5/8	20
RAMK23	2,300	255	3	2.4	1.2	3/8	1/2	5/8	28

Model	Dimensions (in.)											
Model	Н	L	M	W	X	Y	Z					
RAMK13	17-3/4	16-7/8	9	15-5/8	2-3/4	5-1/2	6-15/16					
RAMK17	19-3/4	16-7/8	10	15-5/8	2-3/4	6-1/2	7-15/16					
RAMK23	19-3/4	23-1/4	10	22	2-5/16	6-1/2	7-15/16					

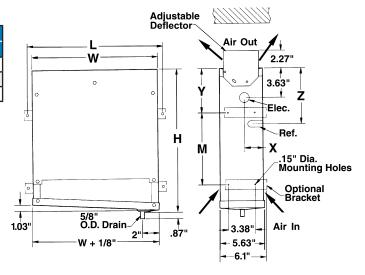



MODEL BTO Twin Flow Reach-In Unit Cooler

Features

- · Compact two-way design with medium velocity air flow
- · Mounts flush to the ceiling and draws air in through the fan and discharges out both sides
- Air pattern reduces air loss when doors are opened and the medium velocity reduces product drying
- Textured aluminum cabinet
- Stainless steel fasteners
- Molded polycarbonate or powder coated wire fan guards
- Drain pan and fan panel is easily removed for installation and servicing
- Optional coated coil available (Model BTOK) for enhanced protection in corrosive environments
- Coils are constructed of copper tubing with aluminum fins
- Expansion valve can be mounted inside the cabinet
- Internal junction box is provided for electrical connection
- Motors are thermally protected and permanently lubricated
- All models are UL listed for the US and Canada
- UL classified to NSF standards
- Sweat inlet connection to reduce leaks (flare connection available as a ship loose option)





Application

Model BTO is ideal for temperatures of 35°F and higher. Box temperatures are kept more constant throughout and fresh products last longer. Seven sizes are available with BTUH from 900 to 5,500 at 10° TD.

Larger BTO sizes are suitable for large reach-in and small step-in or walk-in coolers.

Nomenclature

ВТО	K	09	Α	G
Model	Coil Option	Size	Electrical Code	Vintage
Twin Flow	Blank =	09-55	A = 115/1/60	
Unit Cooler	Standard		B = 208-230/1/60	
	K = Coated			


Performance & Electrical Data

					Moto	r Data			Conr	ections (ir	1.)	Approx.
Model	BTUH 10°F TD	BTUH 15°F TD	CFM	Qty.	115/1/60 Total FLA		208-23 Total		Coil Inlet	Suction	Drain	Ship Wt.
					SP	EC	SP	EC	OD	ID	OD	(lbs.)
BTO(K)09	900	1,350	130	1	0.8	-	0.4	-	1/2	1/2	1/2	12
BTO(K)13	1,300	1,950	240	2	1.6	-	0.8	-	1/2	1/2	1/2	14
BTO(K)18^	1,800	2,700	255	1	1.0	0.4	0.5	0.2	1/2	1/2	1/2	15
BTO(K)25^*	2,500	3,750	460	2	2.0	0.8	1.0	0.4	1/2	1/2	1/2	23
BTO(K)35^*	3,500	5,250	425	2	2.0	0.8	1.0	0.4	1/2	1/2	1/2	24
BTO(K)45^*	4,500	6,750	550	2	2.0	0.8	1.0	0.4	1/2	1/2	5/8	34
BTO(K)55^*	5,500	8,250	730	1	2.1	0.9	1.1	0.5	1/2	1/2	5/8	34

[^] Model available with EC motors

^{*} Models 25, 35, 45 and 55 require an external equalized expansion valve

Model	Dimensions (in.)														
Model	Α	В	C	D	E	F	G	Н	J	K	L	M	N	Р	R
BTO(K)09	16-1/8	19-1/8	7-9/16	4	2-5/16	9-9/16	2-3/4	4-7/8	4-1/2	8-5/8	2-1/2	2-5/8	4-9/16	10	7/8
BTO(K)13	16-1/8	19-1/8	7-9/16	4	2-5/16	9-9/16	2-3/4	5-3/4	4-1/2	8-5/8	2-1/2	2-5/8	4-9/16	10	7/8
BTO(K)18	16-1/8	19-1/8	7-9/16	4	2-5/16	9-9/16	2-3/4	5-3/4	4-1/2	8-5/8	2-1/2	2-5/8	4-9/16	10	7/8
BTO(K)25	18-1/8	26-1/8	11-1/16	4	2-5/16	13-1/16	2-3/4	6-3/4	5-1/2	12-1/8	3-1/2	2-5/8	8-1/16	10	7/8
BTO(K)35	18-1/8	26-1/8	11-1/16	4	2-5/16	13-1/16	2-3/4	6-3/4	5-1/2	12-1/8	3-1/2	2-5/8	8-1/16	10	7/8
BTO(K)45	21-1/8	29-1/8	8-3/16	7-3/4	3-7/16	10-5/8	3-1/2	9-1/4	8	13-5/8	5-15/16	4-1/4	7-9/16	14	1-3/4
BTO(K)55	21-1/8	29-1/8	8-3/16	7-3/4	3-7/16	10-5/8	3-1/2	8-1/2	8	13-5/8	5-15/16	4-1/4	7-9/16	14	1-3/4

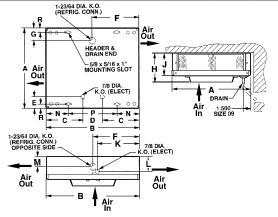



MODEL U Dual Aire Standard Coil Reach-In Unit Cooler

Features

- Textured aluminum cabinet
- Full collar aluminum fins on expanded copper tubes
- Detachable drain pan that is easy to clean
- Molded 3-prong motor connector to save installation time and expense
- · Motors are thermally protected and permanently lubricated
- Optional coated coil available (Model UK) for enhanced protection in corrosive environments
- All models are UL recognized for the US and Canada
- · UL classified to NSF standards
- Sweat inlet connection to reduce leaks (flare connection available as a ship loose option)



Application

Model U is used wherever a small, compact unit is required. It can be mounted on the ceiling or wall. The model U unit draws air through the front and discharges it out both sides to ensure proper distribution of cool air and thus maintain a uniform box temperature.


Nomenclature

U	K	09	0		
Model	Coil Option	Size	Electrical Code		
Dual Aire	Blank =	09-15	0 = 115/1/60		
Standard Coil	Standard		1 = 208-230/1/60		
	K = Coated				

Performance & Electrical Data

	втин	BTUH 15°F TD		Motor D	Data	Conr	Approx.		
Model	10°F TD		CFM	115/1/60 Total FLA	208-230/1/60 Total FLA	Coil Inlet FN	Suction ID	Drain OD	Ship Wt. (lbs.)
U(K)09	850	1,275	190	0.45	0.55	1/2	3/8	1/2	9
U(K)12	1,150	1,725	250	0.45	0.55	1/2	3/8	1/2	10
U(K)15	1,500	2,250	310	1.10	0.55	1/2	3/8	1/2	14

	Model	Dimensions (in.)										
	Model	Н	W	D	Α	В	C					
	U(K)09	8-1/2	11-1/2	8-7/8	6	4	3-1/2					
	U(K)12	8-1/2	17-1/2	8-7/8	12	4	9-1/2					
	U(K)15	9-1/2	17-1/2	10-7/8	12	4	9-1/2					

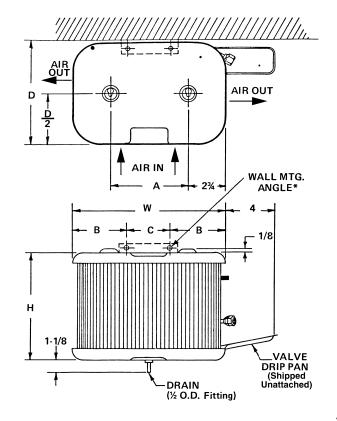



For more information on Bohn refrigeration products, contact your sales representative or visit us at heatcraftrpd.com.



A Brand of Heatcraft Refrigeration Products, LLC 2175 West Park Place Blvd. • Stone Mountain, GA • 30087 800.537.7775

heatcraftrpd.com

Since product improvement is a continuing effort, we reserve the right to make changes in specifications without notice.

BN-RITB-0215 | Version 000